



FRED Modules


V_{RRM} 1200V
I_{FAV} 100 A

Applications

- Inversion Welder
- Uninterruptible Power Supply (UPS)
- Plating Power Supply
- Ultrasonic Cleaner and Welder
- Power Factor Correction (PFC) Circuit
- Converter & Chopper

Features

- Soft Reverse Recovery Characteristics
- Ultrafast Reverse Recovery Time
- Low Reverse Recovery Loss
- Low Forward Voltage
- High Surge Current Capability
- Low Inductance Package

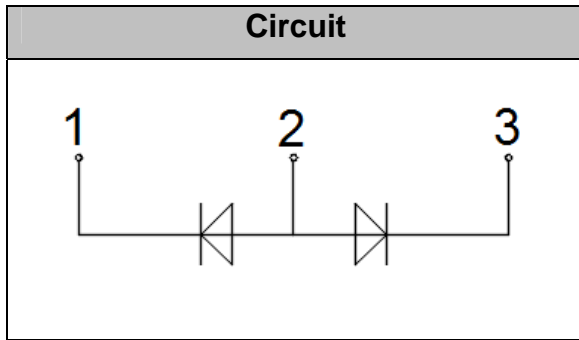

Maximum Ratings

| Symbol | Conditions | Values | Units |
|---------------------|---|-------------|------------------|
| V _R | | 1200 | V |
| V _{RRM} | | 1200 | V |
| I _{F(AV)} | T _C =110°C, Per Leg | 100 | A |
| | T _C =110°C, Per Module | 200 | A |
| I _{F(RMS)} | T _C =110°C, Per Leg | 150 | A |
| I _{FSM} | 1/2 Cycle, 50Hz, Sine | 1100 | A |
| | 1/2 Cycle, 60Hz, Sine | 1200 | A |
| I ² t | T _J =45°C, t=10ms, 50Hz, Sine | 6050 | A ² s |
| | T _J =45°C, t=8.3ms, 60Hz, Sine | 7200 | A ² s |
| P _D | | 280 | W |
| Visol | AC, Ton=1min | 3000 | V |
| T _J | | -40 to +150 | °C |
| T _{STG} | | -40 to +125 | °C |
| Torque | Recommended (M5) | 2.5~4 | N·m |
| Torque | Recommended (M5) | 2.5~4 | N·m |
| Weight | | 100 | g |

Thermal Characteristics

| Symbol | Conditions | Values | Units |
|----------------------|------------|--------|-------|
| R _{th(j-c)} | Per Module | 0.2 | °C/W |



Electrical Characteristics

| Symbol | Conditions | Values | | | Units |
|-----------|--|--------|------|------|-------|
| | | Min. | Typ. | Max. | |
| I_{RM} | $V_R=1200V$ | -- | -- | 0.2 | mA |
| | $V_R=1200V, T_J=125^\circ C$ | -- | -- | 2 | mA |
| V_F | $I_F=100A$ | -- | 1.65 | 1.75 | V |
| | $I_F=100A, T_J=125^\circ C$ | -- | 1.4 | 1.6 | V |
| trr | $I_F=1A, V_R=30V, di_F/dt=-200A/\mu s$ | -- | 35 | -- | ns |
| trr | $V_R=600V, I_F=100A, di_F/dt=-200A/\mu s, T_J=25^\circ C$ | -- | 150 | -- | ns |
| I_{RRM} | | -- | 28 | -- | A |
| trr | $V_R=600V, I_F=100A, di_F/dt=-200A/\mu s, T_J=125^\circ C$ | -- | 255 | -- | ns |
| I_{RRM} | | -- | 48 | -- | A |

Performance Curves

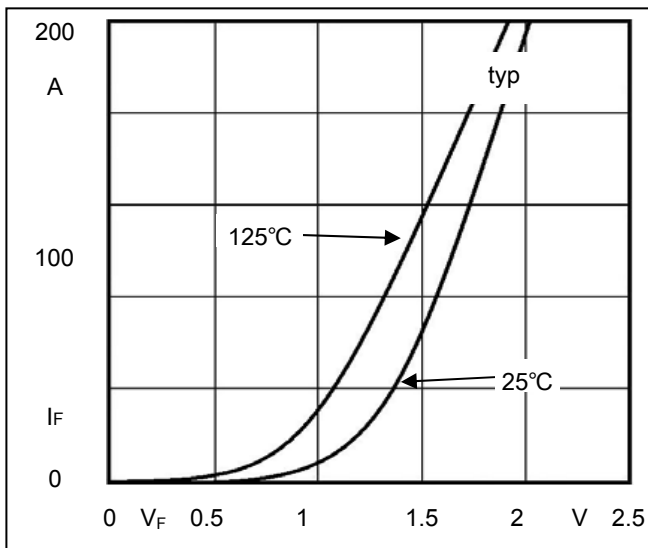


Fig1. Forward Voltage Drop vs Forward Current

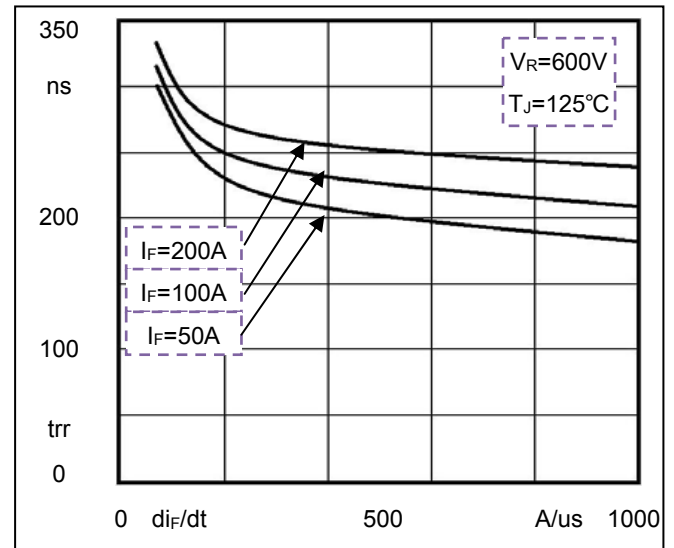


Fig2. Reverse Recovery Time vs di_F/dt

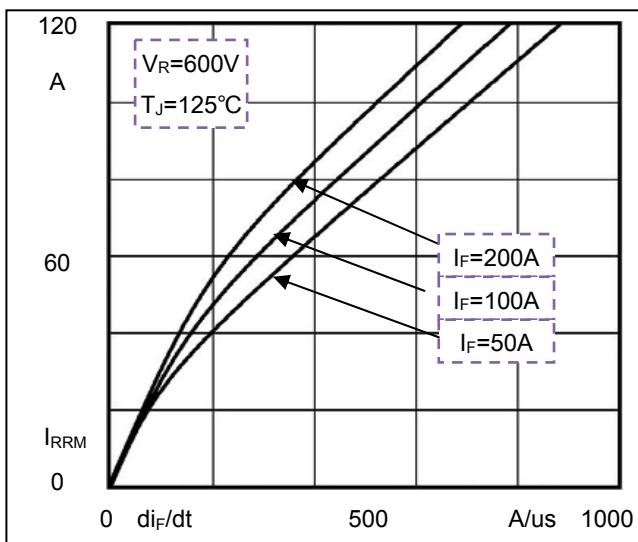


Fig3. Reverse Recovery Current vs di_F/dt


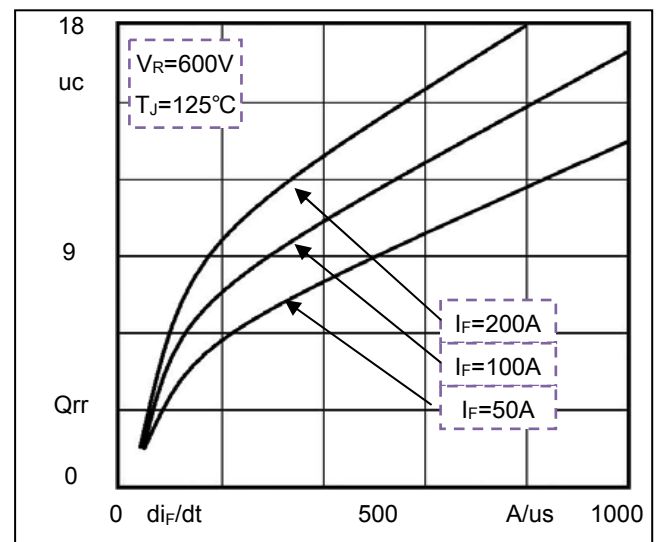


Fig4. Reverse Recovery Charge vs di_F/dt

Package Outline Information

CASE: F5

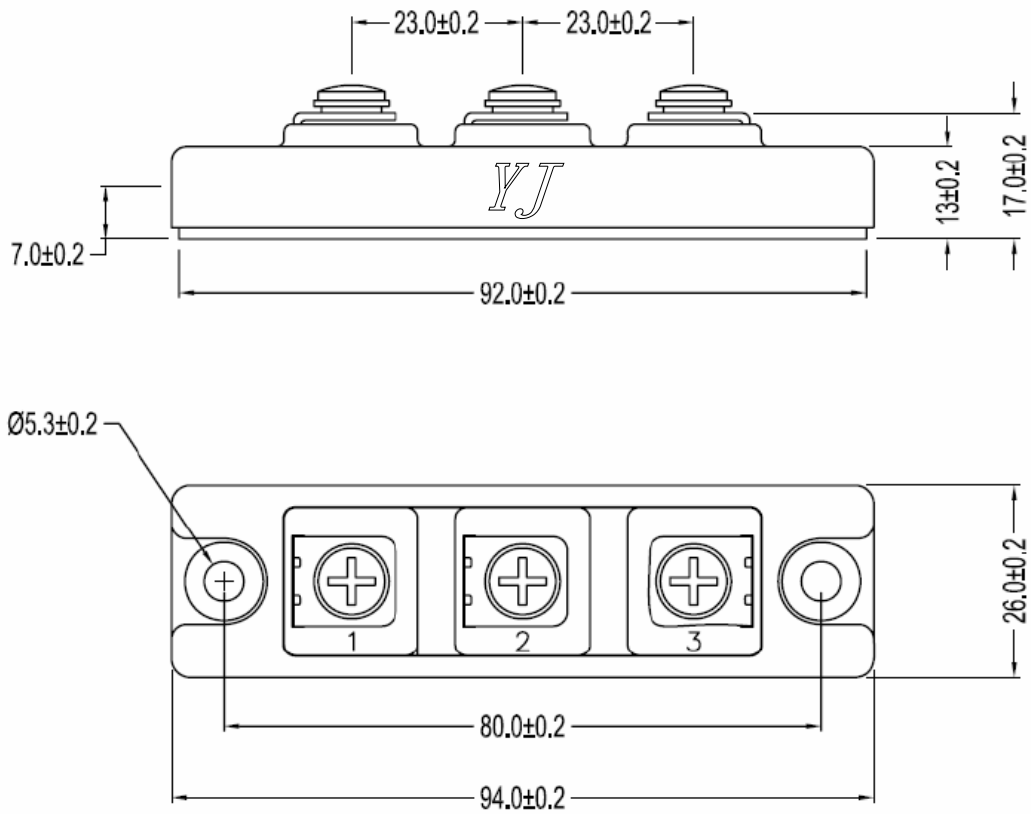

Dimensions in mm