


PROPOSED PAD ARRANGEMENT:

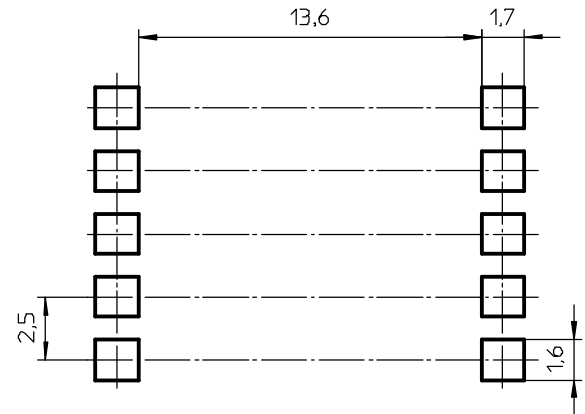

Coil former material: Sumikasuper E4008 (LCP), glass-reinforced.
 UL file number: E54705 - UL94V-0
 Pin material: CuSn - Ni flash, Sn plated.
 Max operating temp.: acc. to IEC 60085 class F, 155°C.
 Resistance to soldering heat: acc. to IEC 60068-2-20 Test Ta, method 1B, 350°C - 3,5sec.
 Solderability: acc. to IEC 60068-2-20 Part 2, Test Ta, method 1, 235°C - 2sec.
 Min. winding area: 5,1 mm²
 Mean length of turn: 27 mm.

CLASS NO.		03-02-20	
CPVS-ER14,5-1S-10P-Z		4322 021 06151	
NAME M.Veekens	CHECK CONTR.	DATE 03-02-20	PROPERTY OF Eigendom van
MPA			
SERIAL NO. 112 - 001		DATE 069	PROPERTY OF A3
© FERROXCUBE 2000			