

Inductors for Power Circuits

Wound/STD • magnetic shielded

VLS series

Type: **VLS201610E**
 VLS201612E
 VLS2010E
 VLS2012E
 VLS252008E
 VLS252010E
 VLS252012E
 VLS252015E
 VLS3010E
 VLS3012E
 VLS3015E
 VLS4012E

Issue date: October 2012

- All specifications are subject to change without notice.
- Conformity to RoHS Directive: This means that, in conformity with EU Directive 2002/95/EC, lead, cadmium, mercury, hexavalent chromium, and specific bromine-based flame retardants, PBB and PBDE, have not been used, except for exempted applications.

Inductors for Power Circuits

Wound/STD • Magnetic Shielded

Conformity to RoHS Directive

VLS Series VLS201610E

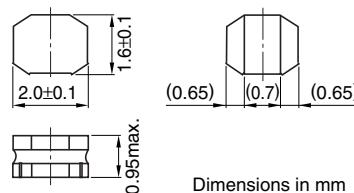
FEATURES

- Miniature size
Mount area: $2 \times 1.6\text{mm}$
Height: 0.95mm max.
- Generic use for portable DC to DC converter line.
- High magnetic shield construction should actualize high resolution for EMC protection.
- Available for automatic mounting in tape and reel package.
- The products do not contain lead and support lead-free soldering.

APPLICATIONS

Cellular phones, DVCs, DSCs, PDAs, LCD displays, HDDs, etc.


SHAPES AND DIMENSIONS



Dimensions in mm



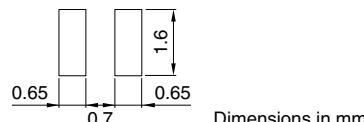RECOMMENDED PC BOARD PATTERN



Dimensions in mm

ELECTRICAL CHARACTERISTICS

| Part No. | Inductance (μH) | Inductance tolerance (%) | Test frequency (MHz) | DC resistance (Ω) | | Rated current(A)* | | Based on temperature rise typ. |
|------------------|---------------------------------|--------------------------------|-------------------------|-------------------------------|-------|-------------------|------|--------------------------------------|
| | | | | max. | typ. | max. | typ. | |
| VLS201610ET-R47N | 0.47 | ±30 | 1.0 | 0.065 | 0.054 | 1.85 | 2.10 | 1.95 |
| VLS201610ET-R68N | 0.68 | ±30 | 1.0 | 0.086 | 0.072 | 1.65 | 1.85 | 1.65 |
| VLS201610ET-1R0N | 1.0 | ±30 | 1.0 | 0.119 | 0.099 | 1.35 | 1.50 | 1.40 |
| VLS201610ET-1R5N | 1.5 | ±30 | 1.0 | 0.181 | 0.151 | 1.10 | 1.20 | 1.15 |
| VLS201610ET-2R2M | 2.2 | ±20 | 1.0 | 0.276 | 0.230 | 0.94 | 1.05 | 0.95 |
| VLS201610ET-3R3M | 3.3 | ±20 | 1.0 | 0.458 | 0.382 | 0.75 | 0.84 | 0.73 |
| VLS201610ET-4R7M | 4.7 | ±20 | 1.0 | 0.554 | 0.462 | 0.64 | 0.72 | 0.67 |
| VLS201610ET-6R8M | 6.8 | ±20 | 1.0 | 0.840 | 0.700 | 0.53 | 0.59 | 0.54 |
| VLS201610ET-100M | 10 | ±20 | 1.0 | 1.380 | 1.150 | 0.40 | 0.45 | 0.42 |

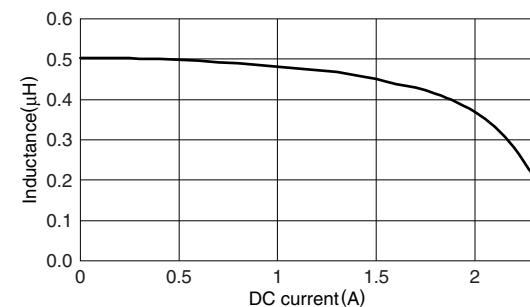
* Rated current: Value obtained when current flows and the temperature has risen to 40°C or when DC current flows and the nominal value of inductance has fallen by 30%, whichever is smaller.

• Operating temperature range: -40 to $+105^\circ\text{C}$ (Including self-temperature rise)


TYPICAL ELECTRICAL CHARACTERISTICS

INDUCTANCE vs. DC SUPERPOSITION CHARACTERISTICS

VLS201610ET-R47N











VLS201610ET-R68N

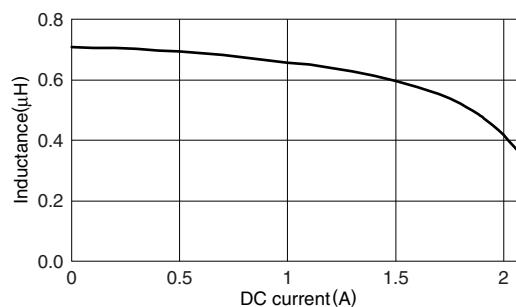

• Conformity to RoHS Directive: This means that, in conformity with EU Directive 2002/95/EC, lead, cadmium, mercury, hexavalent chromium, and specific bromine-based flame retardants, PBB and PBDE, have not been used, except for exempted applications.

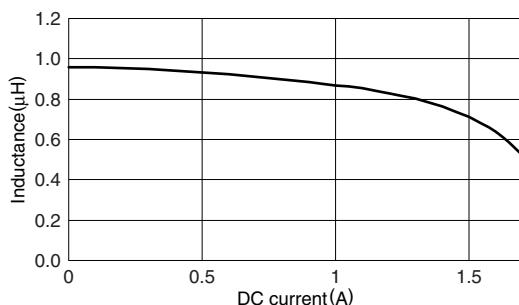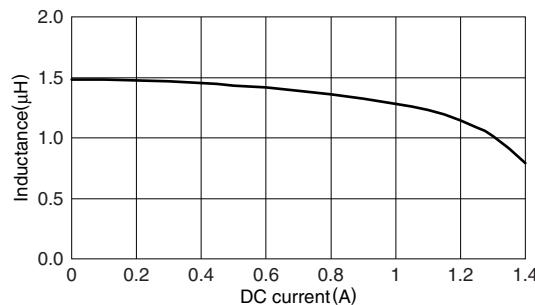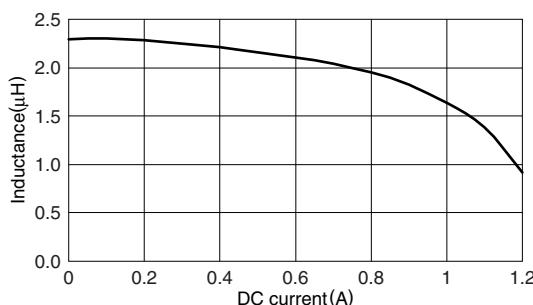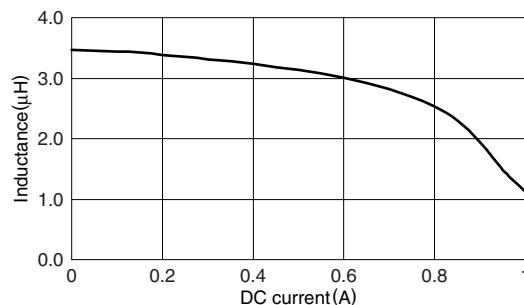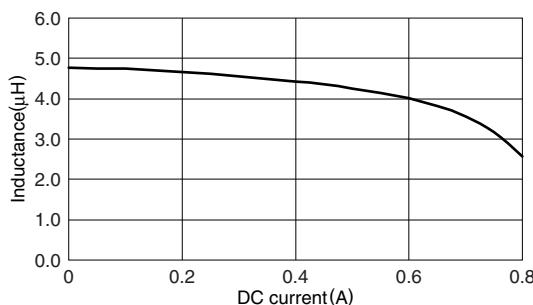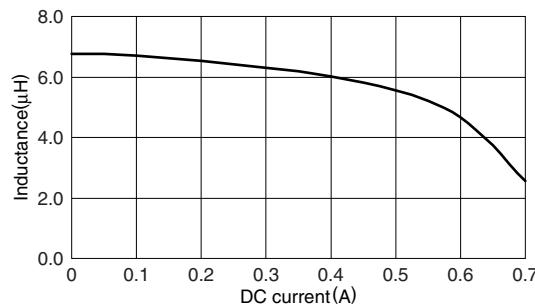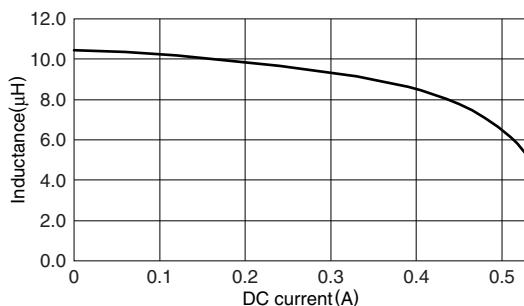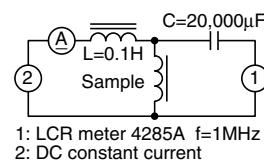• All specifications are subject to change without notice.

TYPICAL ELECTRICAL CHARACTERISTICS
INDUCTANCE vs. DC SUPERPOSITION CHARACTERISTICS
VLS201610ET-1R0N

VLS201610ET-1R5N

VLS201610ET-2R2M

VLS201610ET-3R3M

VLS201610ET-4R7M

VLS201610ET-6R8M

VLS201610ET-100M

TEST CIRCUIT


Inductors for Power Circuits

Wound/STD • Magnetic Shielded

Conformity to RoHS Directive

VLS Series VLS201612E

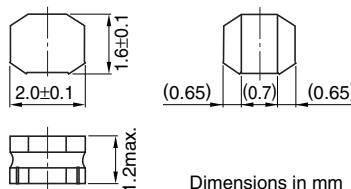
FEATURES

- Miniature size
Mount area: $2 \times 1.6\text{mm}$
Height: 1.2mm max.
- Generic use for portable DC to DC converter line.
- High magnetic shield construction should actualize high resolution for EMC protection.
- Available for automatic mounting in tape and reel package.
- The products do not contain lead and support lead-free soldering.

APPLICATIONS

Cellular phones, DVCs, DSCs, PDAs, LCD displays, HDDs, etc.


SHAPES AND DIMENSIONS



Dimensions in mm



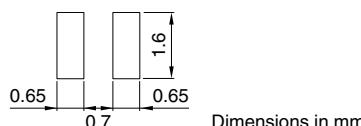RECOMMENDED PC BOARD PATTERN



Dimensions in mm

ELECTRICAL CHARACTERISTICS

| Part No. | Inductance (μH) | Inductance tolerance (%) | Test frequency (MHz) | DC resistance (Ω) | | Rated current(A)* | | Based on temperature rise typ. |
|------------------|---------------------------------|--------------------------------|-------------------------|-------------------------------|-------|-------------------|------|--------------------------------------|
| | | | | max. | typ. | max. | typ. | |
| VLS201612ET-R47N | 0.47 | ±30 | 1.0 | 0.063 | 0.052 | 1.90 | 2.15 | 2.00 |
| VLS201612ET-R68N | 0.68 | ±30 | 1.0 | 0.072 | 0.060 | 1.70 | 1.90 | 1.85 |
| VLS201612ET-1R0N | 1.0 | ±30 | 1.0 | 0.093 | 0.077 | 1.50 | 1.65 | 1.65 |
| VLS201612ET-1R5N | 1.5 | ±30 | 1.0 | 0.159 | 0.132 | 1.20 | 1.30 | 1.25 |
| VLS201612ET-2R2M | 2.2 | ±20 | 1.0 | 0.195 | 0.162 | 1.05 | 1.15 | 1.15 |
| VLS201612ET-3R3M | 3.3 | ±20 | 1.0 | 0.357 | 0.297 | 0.79 | 0.88 | 0.85 |
| VLS201612ET-4R7M | 4.7 | ±20 | 1.0 | 0.438 | 0.365 | 0.70 | 0.78 | 0.75 |
| VLS201612ET-6R8M | 6.8 | ±20 | 1.0 | 0.708 | 0.590 | 0.58 | 0.65 | 0.60 |
| VLS201612ET-100M | 10 | ±20 | 1.0 | 1.026 | 0.855 | 0.47 | 0.53 | 0.50 |

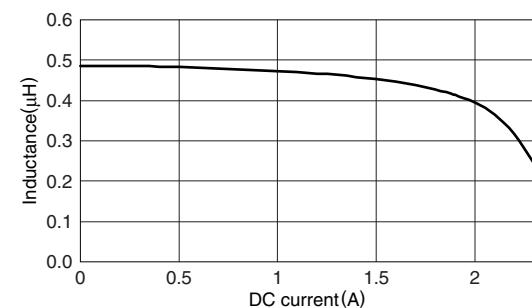
* Rated current: Value obtained when current flows and the temperature has risen to 40°C or when DC current flows and the nominal value of inductance has fallen by 30%, whichever is smaller.

• Operating temperature range: -40 to +105°C (Including self-temperature rise)


TYPICAL ELECTRICAL CHARACTERISTICS

INDUCTANCE vs. DC SUPERPOSITION CHARACTERISTICS

VLS201612ET-R47N











VLS201612ET-R68N

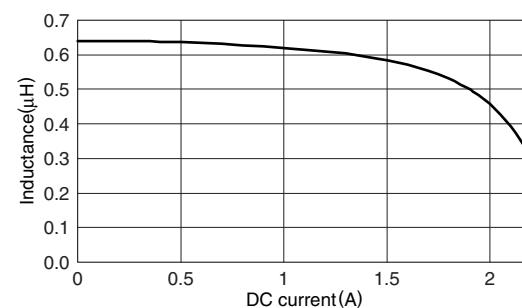

• Conformity to RoHS Directive: This means that, in conformity with EU Directive 2002/95/EC, lead, cadmium, mercury, hexavalent chromium, and specific bromine-based flame retardants, PBB and PBDE, have not been used, except for exempted applications.

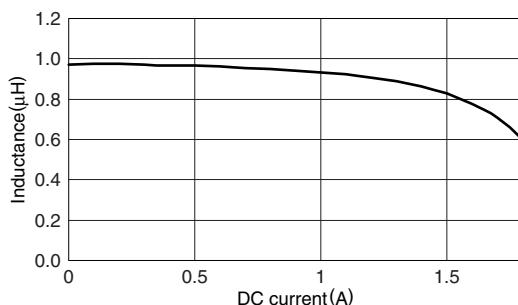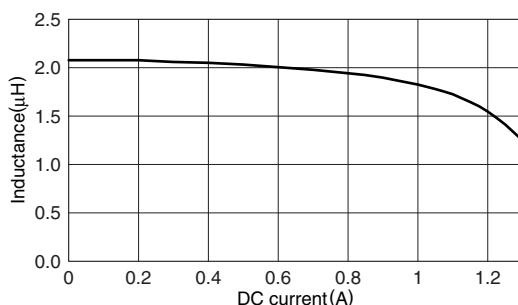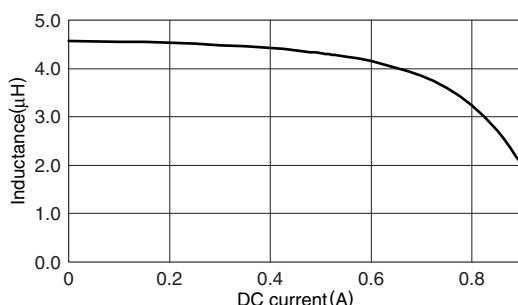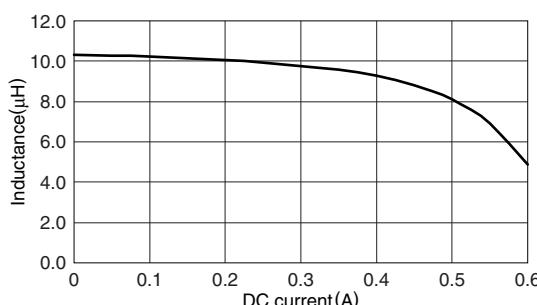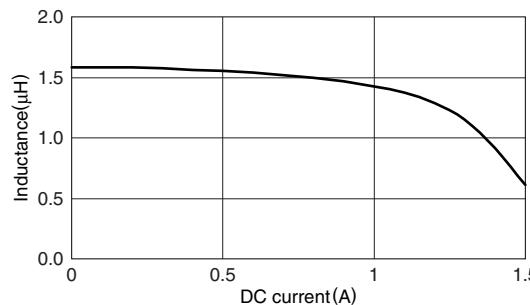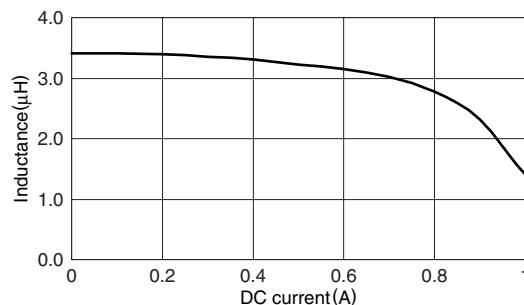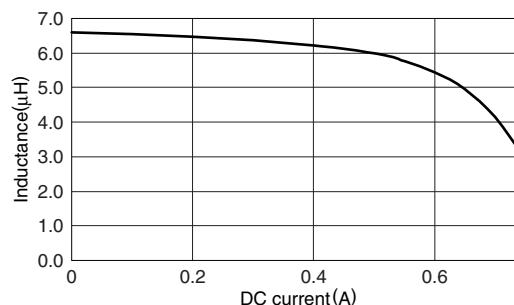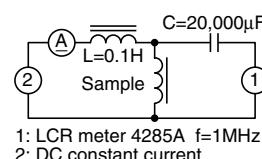• All specifications are subject to change without notice.

TYPICAL ELECTRICAL CHARACTERISTICS
INDUCTANCE vs. DC SUPERPOSITION CHARACTERISTICS
VLS201612ET-1R0N

VLS201612ET-2R2M

VLS201612ET-4R7M

VLS201612ET-100M

VLS201612ET-1R5N

VLS201612ET-3R3M

VLS201612ET-6R8M

TEST CIRCUIT


Inductors for Power Circuits

Wound/STD • Magnetic Shielded

Conformity to RoHS Directive

VLS Series VLS2010E

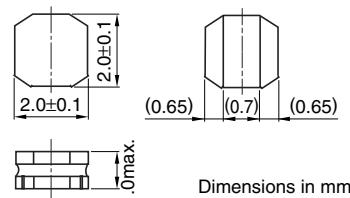
FEATURES

- Miniature size
Mount area: 2x2mm
Height: 1.0mm max.
- Generic use for portable DC to DC converter line.
- High magnetic shield construction should actualize high resolution for EMC protection.
- Available for automatic mounting in tape and reel package.
- The products do not contain lead and support lead-free soldering.

APPLICATIONS


Cellular phones, DVCs, DSCs, PDAs, LCD displays, HDDs, etc.

SHAPES AND DIMENSIONS



Dimensions in mm

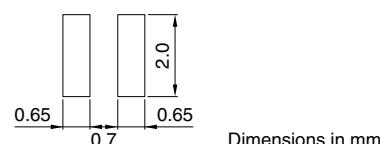RECOMMENDED PC BOARD PATTERN



Dimensions in mm

ELECTRICAL CHARACTERISTICS

| Part No. | Inductance (μ H) | Inductance tolerance (%) | Test frequency (MHz) | DC resistance (Ω) | | Rated current(A)* | | Based on temperature rise typ. |
|----------------|--------------------------|--------------------------------|-------------------------|-------------------------------|-------|-------------------|------|--------------------------------------|
| | | | | max. | typ. | max. | typ. | |
| VLS2010ET-R56N | 0.56 | ±30 | 1.0 | 0.060 | 0.050 | 2.00 | 2.25 | 2.05 |
| VLS2010ET-1R0N | 1.0 | ±30 | 1.0 | 0.108 | 0.090 | 1.45 | 1.65 | 1.55 |
| VLS2010ET-1R5N | 1.5 | ±30 | 1.0 | 0.156 | 0.130 | 1.20 | 1.30 | 1.25 |
| VLS2010ET-2R2M | 2.2 | ±20 | 1.0 | 0.228 | 0.190 | 1.00 | 1.10 | 1.05 |
| VLS2010ET-3R3M | 3.3 | ±20 | 1.0 | 0.348 | 0.290 | 0.83 | 0.93 | 0.86 |
| VLS2010ET-4R7M | 4.7 | ±20 | 1.0 | 0.408 | 0.340 | 0.70 | 0.78 | 0.79 |
| VLS2010ET-6R8M | 6.8 | ±20 | 1.0 | 0.648 | 0.540 | 0.57 | 0.64 | 0.63 |
| VLS2010ET-100M | 10 | ±20 | 1.0 | 0.936 | 0.780 | 0.47 | 0.52 | 0.52 |
| VLS2010ET-150M | 15 | ±20 | 1.0 | 1.476 | 1.230 | 0.40 | 0.44 | 0.41 |
| VLS2010ET-220M | 22 | ±20 | 1.0 | 2.040 | 1.700 | 0.33 | 0.37 | 0.35 |

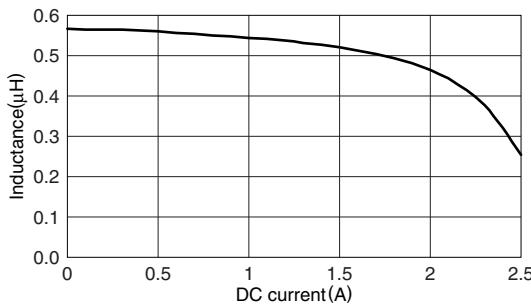
* Rated current: Value obtained when current flows and the temperature has risen to 40°C or when DC current flows and the nominal value of inductance has fallen by 30%, whichever is smaller.

• Operating temperature range: -40 to +105°C (Including self-temperature rise)


TYPICAL ELECTRICAL CHARACTERISTICS

INDUCTANCE vs. DC SUPERPOSITION CHARACTERISTICS

VLS2010ET-R56N



VLS2010ET-1R0N

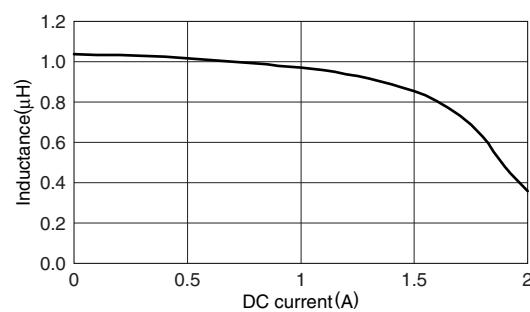


• Conformity to RoHS Directive: This means that, in conformity with EU Directive 2002/95/EC, lead, cadmium, mercury, hexavalent chromium, and specific bromine-based flame retardants, PBB and PBDE, have not been used, except for exempted applications.

• All specifications are subject to change without notice.


TYPICAL ELECTRICAL CHARACTERISTICS

INDUCTANCE vs. DC SUPERPOSITION CHARACTERISTICS

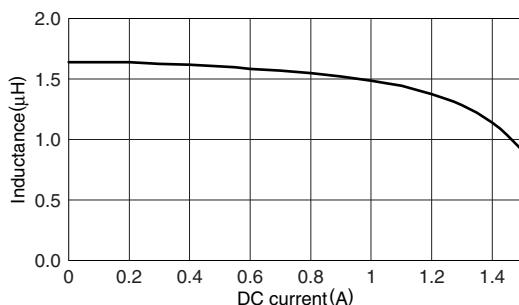
VLS2010ET-1R5N




VLS2010ET-2R2M

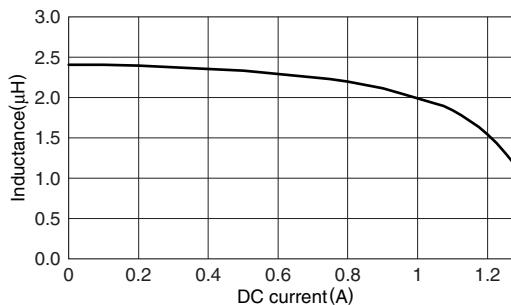


VLS2010ET-3R3M

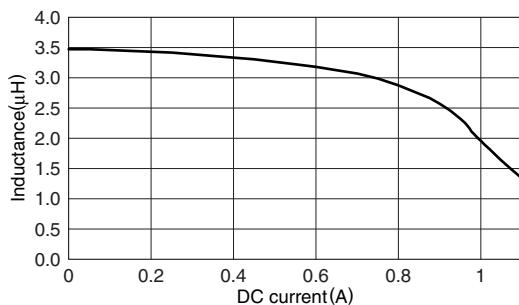


VLS2010ET-4R7M

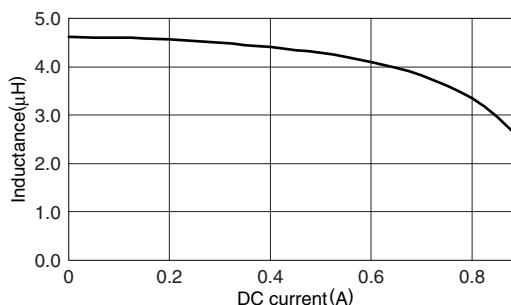


VLS2010ET-6R8M

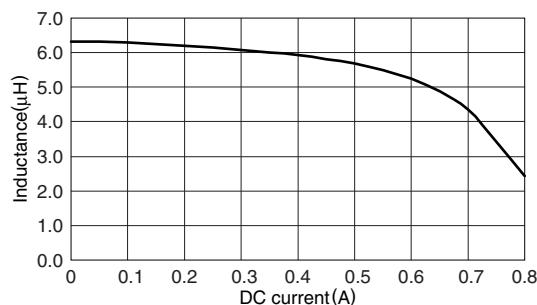


VLS2010ET-100M

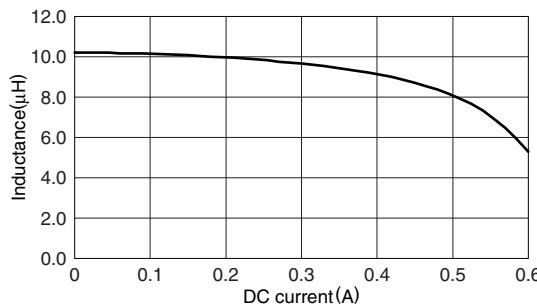


VLS2010ET-150M

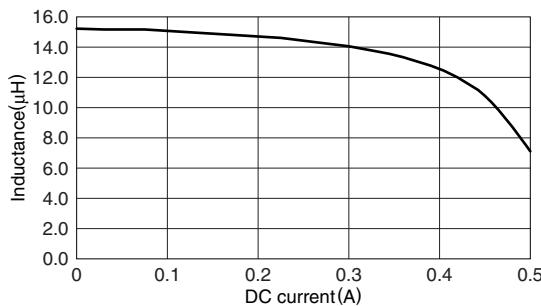

VLS2010ET-220M

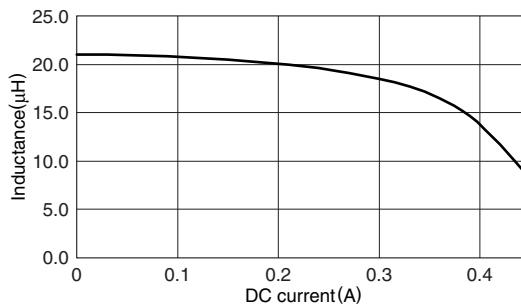

TEST CIRCUIT

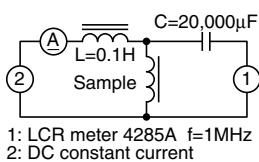

1: LCR meter 4285A f=1MHz
2: DC constant current

Inductors for Power Circuits

Wound/STD • Magnetic Shielded

Conformity to RoHS Directive

VLS Series VLS2012E

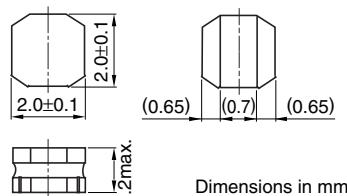
FEATURES

- Miniature size
Mount area: 2x2mm
Height: 1.2mm max.
- Generic use for portable DC to DC converter line.
- High magnetic shield construction should actualize high resolution for EMC protection.
- Available for automatic mounting in tape and reel package.
- The products do not contain lead and support lead-free soldering.

APPLICATIONS


Cellular phones, DVCs, DSCs, PDAs, LCD displays, HDDs, etc.

SHAPES AND DIMENSIONS



Dimensions in mm

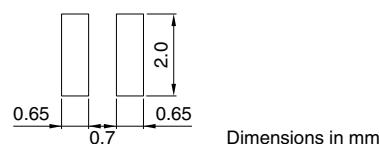RECOMMENDED PC BOARD PATTERN



Dimensions in mm

ELECTRICAL CHARACTERISTICS

| Part No. | Inductance (μ H) | Inductance tolerance (%) | Test frequency (MHz) | DC resistance (Ω) | | Rated current(A)* | | Based on temperature rise typ. |
|----------------|--------------------------|--------------------------------|-------------------------|-------------------------------|-------|-------------------|------|--------------------------------------|
| | | | | max. | typ. | max. | typ. | |
| VLS2012ET-R47N | 0.47 | ±30 | 1.0 | 0.059 | 0.049 | 2.05 | 2.25 | 2.00 |
| VLS2012ET-R68N | 0.68 | ±30 | 1.0 | 0.066 | 0.055 | 1.70 | 1.90 | 1.85 |
| VLS2012ET-1R0N | 1.0 | ±30 | 1.0 | 0.086 | 0.071 | 1.45 | 1.65 | 1.65 |
| VLS2012ET-1R5N | 1.5 | ±30 | 1.0 | 0.108 | 0.090 | 1.20 | 1.30 | 1.45 |
| VLS2012ET-2R2M | 2.2 | ±20 | 1.0 | 0.153 | 0.127 | 1.00 | 1.10 | 1.25 |
| VLS2012ET-3R3M | 3.3 | ±20 | 1.0 | 0.228 | 0.190 | 0.84 | 0.93 | 1.00 |
| VLS2012ET-4R7M | 4.7 | ±20 | 1.0 | 0.336 | 0.280 | 0.70 | 0.78 | 0.84 |
| VLS2012ET-6R8M | 6.8 | ±20 | 1.0 | 0.498 | 0.415 | 0.57 | 0.64 | 0.69 |
| VLS2012ET-100M | 10 | ±20 | 1.0 | 0.834 | 0.695 | 0.47 | 0.52 | 0.53 |
| VLS2012ET-150M | 15 | ±20 | 1.0 | 1.062 | 0.885 | 0.40 | 0.44 | 0.47 |
| VLS2012ET-220M | 22 | ±20 | 1.0 | 1.764 | 1.470 | 0.33 | 0.37 | 0.35 |

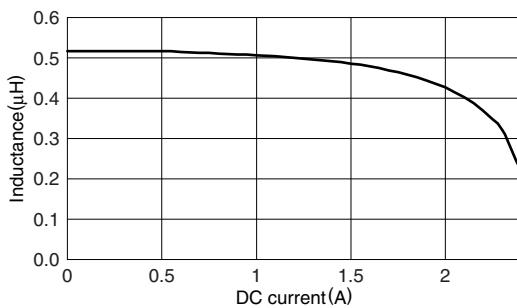
* Rated current: Value obtained when current flows and the temperature has risen to 40°C or when DC current flows and the nominal value of inductance has fallen by 30%, whichever is smaller.

• Operating temperature range: -40 to +105°C (Including self-temperature rise)


TYPICAL ELECTRICAL CHARACTERISTICS

INDUCTANCE vs. DC SUPERPOSITION CHARACTERISTICS

VLS2012ET-R47N













VLS2012ET-R68N

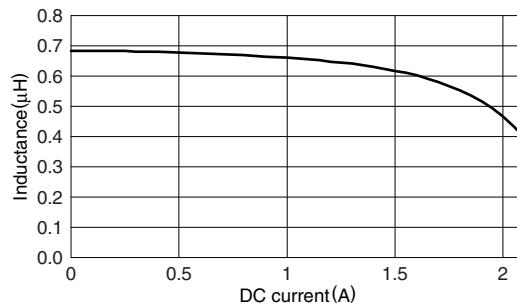

• Conformity to RoHS Directive: This means that, in conformity with EU Directive 2002/95/EC, lead, cadmium, mercury, hexavalent chromium, and specific bromine-based flame retardants, PBB and PBDE, have not been used, except for exempted applications.

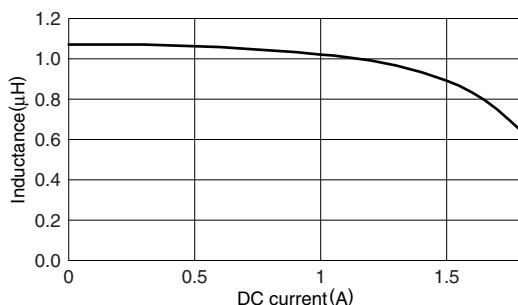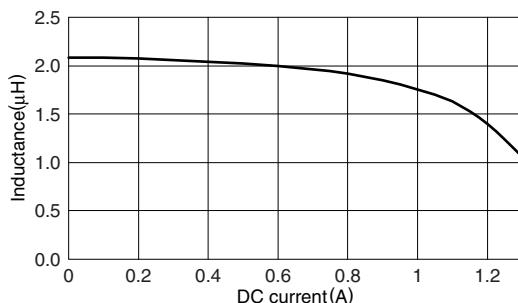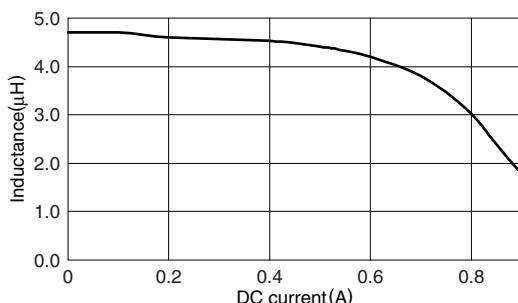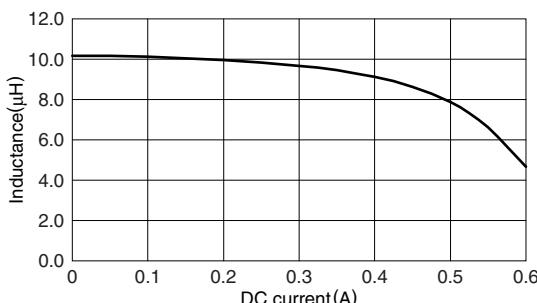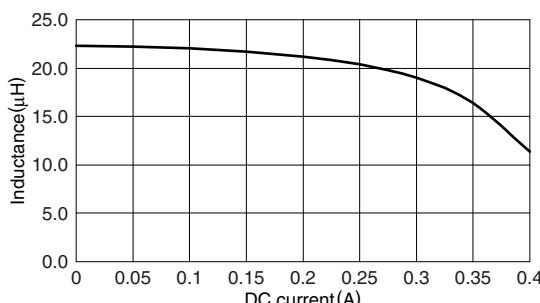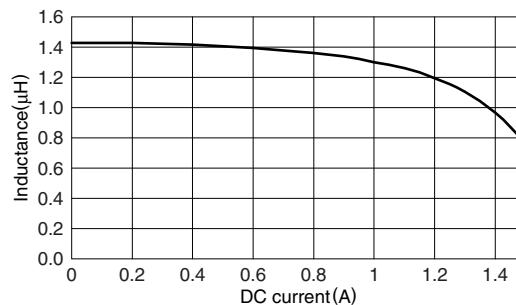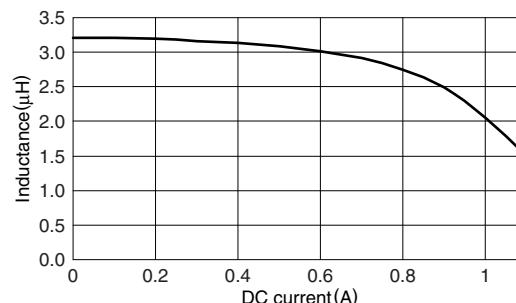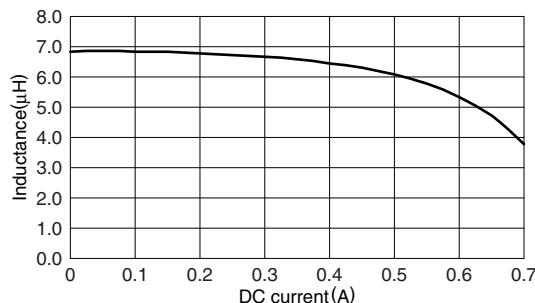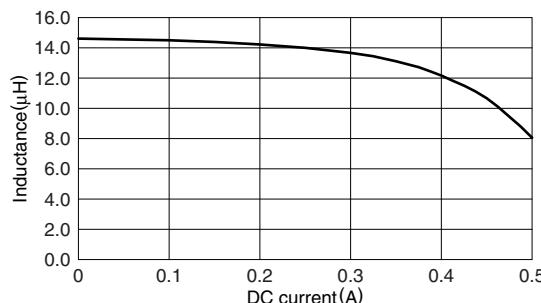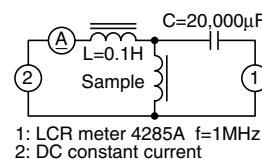• All specifications are subject to change without notice.

TYPICAL ELECTRICAL CHARACTERISTICS
INDUCTANCE vs. DC SUPERPOSITION CHARACTERISTICS
VLS2012ET-1R0N

VLS2012ET-2R2M

VLS2012ET-4R7M

VLS2012ET-100M

VLS2012ET-220M

VLS2012ET-1R5N

VLS2012ET-3R3M

VLS2012ET-6R8M

VLS2012ET-150M

TEST CIRCUIT


Inductors for Power Circuits

Wound/STD • Magnetic Shielded

Conformity to RoHS Directive

VLS Series VLS252008E

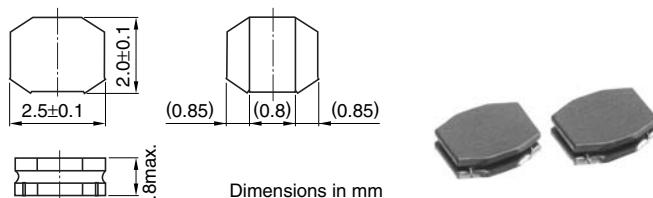
FEATURES

- Miniature size
Mount area: 2.5×2mm
Height: 0.8mm max.
- Generic use for portable DC to DC converter line.
- High magnetic shield construction should actualize high resolution for EMC protection.
- Available for automatic mounting in tape and reel package.
- The products do not contain lead and support lead-free soldering.

APPLICATIONS

Cellular phones, DVCs, DSCs, PDAs, LCD displays, HDDs, etc.


SHAPES AND DIMENSIONS



Dimensions in mm



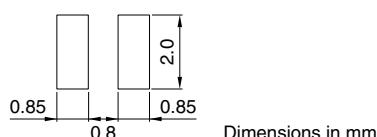RECOMMENDED PC BOARD PATTERN



Dimensions in mm

ELECTRICAL CHARACTERISTICS

| Part No. | Inductance (μ H) | Inductance tolerance (%) | Test frequency (MHz) | DC resistance (Ω) | | Rated current(A)* | | Based on temperature rise typ. |
|------------------|--------------------------|--------------------------------|-------------------------|-------------------------------|-------|-------------------|------|--------------------------------------|
| | | | | max. | typ. | max. | typ. | |
| VLS252008ET-R47N | 0.47 | ±30 | 1.0 | 0.140 | 0.116 | 1.65 | 1.80 | 1.20 |
| VLS252008ET-1R0N | 1.0 | ±30 | 1.0 | 0.219 | 0.182 | 1.20 | 1.35 | 0.97 |
| VLS252008ET-1R5N | 1.5 | ±30 | 1.0 | 0.248 | 0.206 | 1.00 | 1.10 | 0.91 |
| VLS252008ET-2R2M | 2.2 | ±20 | 1.0 | 0.290 | 0.241 | 0.77 | 0.86 | 0.84 |
| VLS252008ET-3R3M | 3.3 | ±20 | 1.0 | 0.416 | 0.346 | 0.73 | 0.82 | 0.70 |
| VLS252008ET-4R7M | 4.7 | ±20 | 1.0 | 0.580 | 0.483 | 0.61 | 0.68 | 0.59 |
| VLS252008ET-6R8M | 6.8 | ±20 | 1.0 | 0.818 | 0.681 | 0.49 | 0.55 | 0.50 |
| VLS252008ET-100M | 10.0 | ±20 | 1.0 | 1.232 | 1.026 | 0.43 | 0.48 | 0.41 |

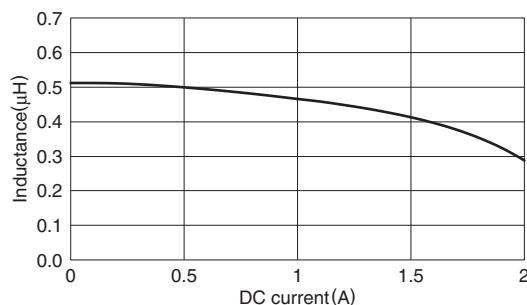
* Rated current: Value obtained when current flows and the temperature has risen to 40°C or when DC current flows and the nominal value of inductance has fallen by 30%, whichever is smaller.

- Operating temperature range: -40 to +105°C (Including self-temperature rise)


TYPICAL ELECTRICAL CHARACTERISTICS

INDUCTANCE vs. DC SUPERPOSITION CHARACTERISTICS

VLS252008ET-R47N










VLS252008ET-1R0N

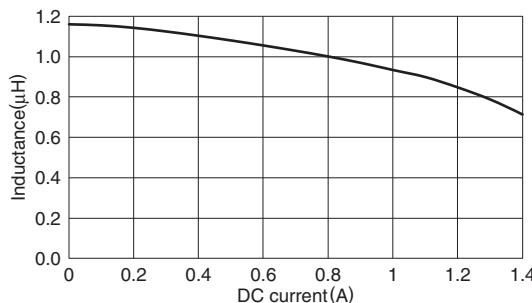

- Conformity to RoHS Directive: This means that, in conformity with EU Directive 2002/95/EC, lead, cadmium, mercury, hexavalent chromium, and specific bromine-based flame retardants, PBB and PBDE, have not been used, except for exempted applications.

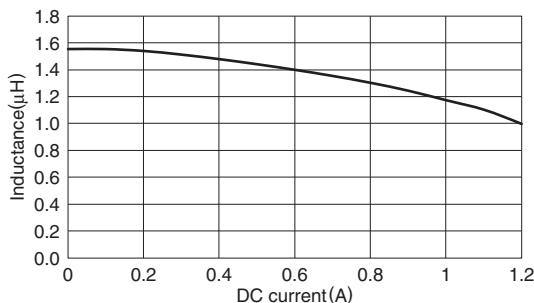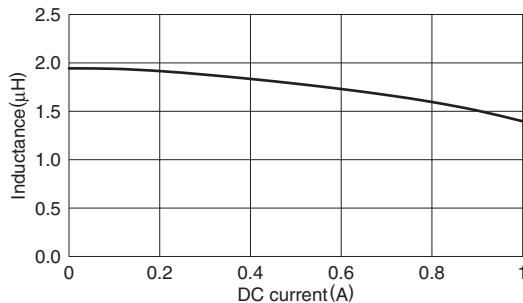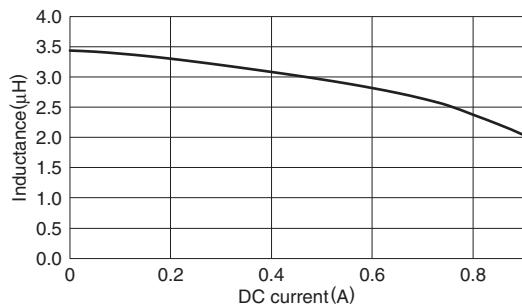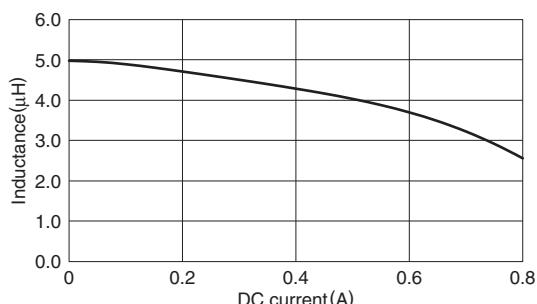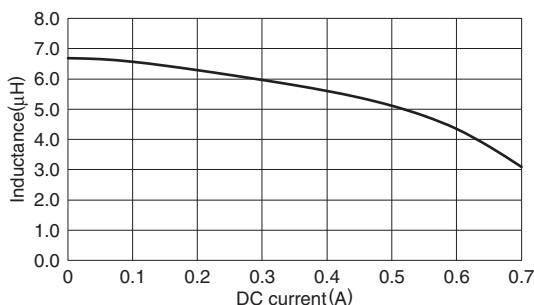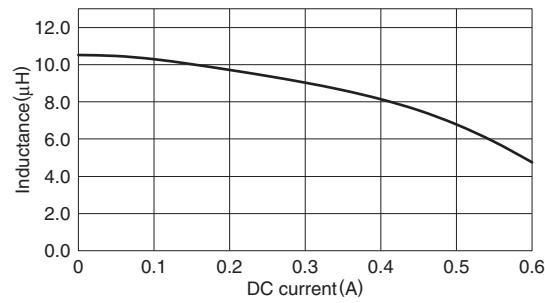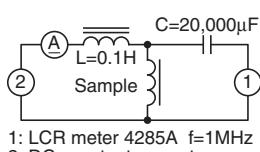- All specifications are subject to change without notice.

TYPICAL ELECTRICAL CHARACTERISTICS
INDUCTANCE vs. DC SUPERPOSITION CHARACTERISTICS
VLS252008ET-1R5N

VLS252008ET-2R2M

VLS252008ET-3R3M

VLS252008ET-4R7M

VLS252008ET-6R8M

VLS252008ET-100M

TEST CIRCUIT


Inductors for Power Circuits

Wound/STD • Magnetic Shielded

Conformity to RoHS Directive

VLS Series VLS252010E

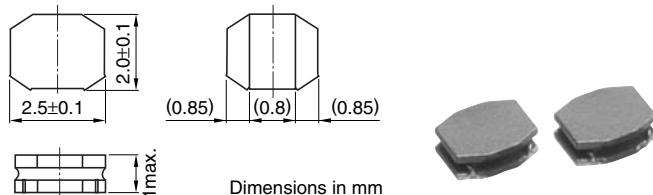
FEATURES

- Miniature size
Mount area: 2.5×2mm
Height: 1.0mm max.
- Generic use for portable DC to DC converter line.
- High magnetic shield construction should actualize high resolution for EMC protection.
- Available for automatic mounting in tape and reel package.
- The products do not contain lead and support lead-free soldering.

APPLICATIONS


Cellular phones, DVCs, DSCs, PDAs, LCD displays, HDDs, etc.

SHAPES AND DIMENSIONS



Dimensions in mm

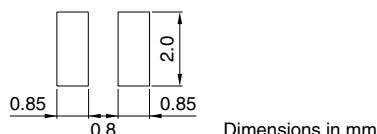RECOMMENDED PC BOARD PATTERN



Dimensions in mm

ELECTRICAL CHARACTERISTICS

| Part No. | Inductance (μ H) | Inductance tolerance (%) | Test frequency (MHz) | DC resistance (Ω) | | Rated current(A)* | | Based on temperature rise typ. |
|------------------|--------------------------|--------------------------------|-------------------------|-------------------------------|-------|-------------------|------|--------------------------------------|
| | | | | max. | typ. | max. | typ. | |
| VLS252010ET-R47N | 0.47 | ±30 | 1.0 | 0.046 | 0.038 | 2.50 | 2.80 | 2.65 |
| VLS252010ET-R68N | 0.68 | ±30 | 1.0 | 0.062 | 0.052 | 2.05 | 2.30 | 2.20 |
| VLS252010ET-1R0N | 1.0 | ±30 | 1.0 | 0.084 | 0.070 | 1.75 | 1.90 | 1.90 |
| VLS252010ET-1R5N | 1.5 | ±30 | 1.0 | 0.128 | 0.107 | 1.45 | 1.60 | 1.50 |
| VLS252010ET-2R2M | 2.2 | ±20 | 1.0 | 0.190 | 0.158 | 1.20 | 1.30 | 1.20 |
| VLS252010ET-3R3M | 3.3 | ±20 | 1.0 | 0.275 | 0.229 | 0.94 | 1.05 | 1.00 |
| VLS252010ET-4R7M | 4.7 | ±20 | 1.0 | 0.398 | 0.332 | 0.80 | 0.89 | 0.82 |
| VLS252010ET-6R8M | 6.8 | ±20 | 1.0 | 0.532 | 0.443 | 0.68 | 0.76 | 0.71 |
| VLS252010ET-100M | 10 | ±20 | 1.0 | 0.854 | 0.712 | 0.56 | 0.63 | 0.55 |

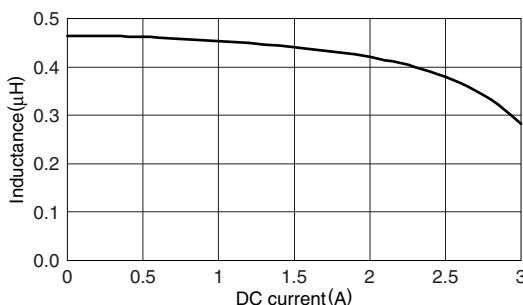
* Rated current: Value obtained when current flows and the temperature has risen to 40°C or when DC current flows and the nominal value of inductance has fallen by 30%, whichever is smaller.

• Operating temperature range: -40 to +105°C (Including self-temperature rise)


TYPICAL ELECTRICAL CHARACTERISTICS

INDUCTANCE vs. DC SUPERPOSITION CHARACTERISTICS

VLS252010ET-R47N











VLS252010ET-R68N

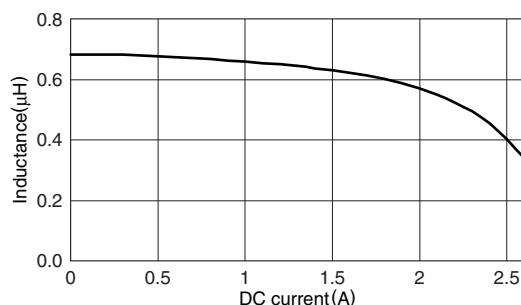

• Conformity to RoHS Directive: This means that, in conformity with EU Directive 2002/95/EC, lead, cadmium, mercury, hexavalent chromium, and specific bromine-based flame retardants, PBB and PBDE, have not been used, except for exempted applications.

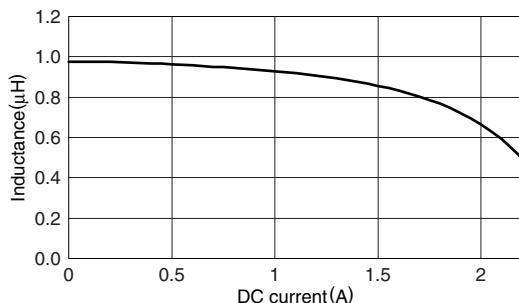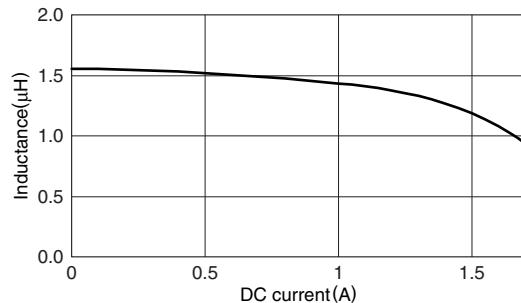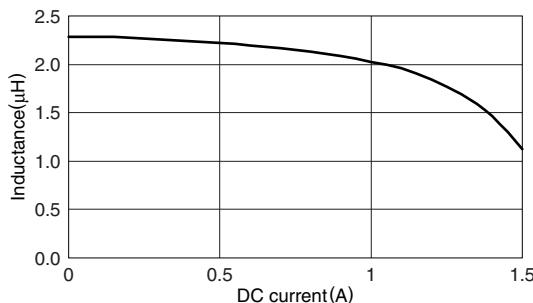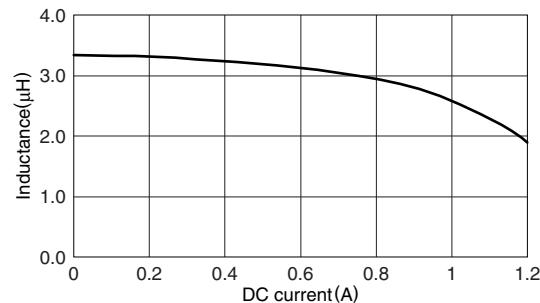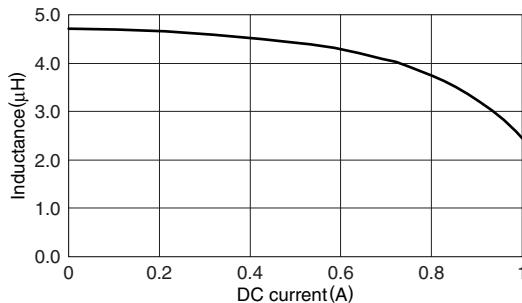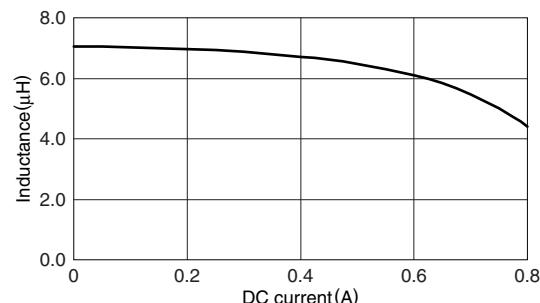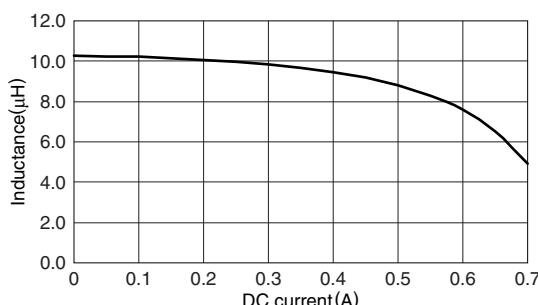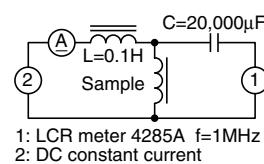• All specifications are subject to change without notice.

TYPICAL ELECTRICAL CHARACTERISTICS
INDUCTANCE vs. DC SUPERPOSITION CHARACTERISTICS
VLS252010ET-1R0N

VLS252010ET-1R5N

VLS252010ET-2R2M

VLS252010ET-3R3M

VLS252010ET-4R7M

VLS252010ET-6R8M

VLS252010ET-100M

TEST CIRCUIT


Inductors for Power Circuits

Wound/STD • Magnetic Shielded

Conformity to RoHS Directive

VLS Series VLS252012E

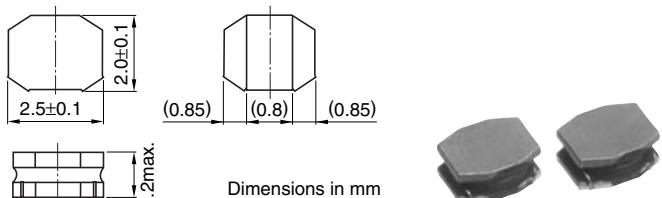
FEATURES

- Miniature size
Mount area: 2.5×2mm
Height: 1.2mm max.
- Generic use for portable DC to DC converter line.
- High magnetic shield construction should actualize high resolution for EMC protection.
- Available for automatic mounting in tape and reel package.
- The products do not contain lead and support lead-free soldering.

APPLICATIONS

DVCs, DSCs, PDAs, LCD displays, cellular phones, HDDs, etc.


SHAPES AND DIMENSIONS



Dimensions in mm



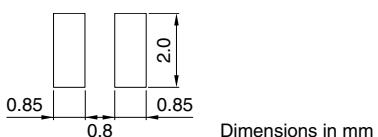RECOMMENDED PC BOARD PATTERN



Dimensions in mm

ELECTRICAL CHARACTERISTICS

| Part No. | Inductance (μ H) | Inductance tolerance (%) | Test frequency (MHz) | DC resistance (Ω) | | Rated current(A)* | | Based on temperature rise typ. |
|------------------|--------------------------|--------------------------------|-------------------------|-------------------------------|-------|-------------------|------|-----------------------------------|
| | | | | max. | typ. | max. | typ. | |
| VLS252012ET-R47N | 0.47 | ±30 | 1.0 | 0.056 | 0.047 | 2.75 | 3.10 | 2.15 |
| VLS252012ET-1R0N | 1.0 | ±30 | 1.0 | 0.087 | 0.073 | 2.20 | 2.45 | 1.70 |
| VLS252012ET-1R5N | 1.5 | ±30 | 1.0 | 0.126 | 0.105 | 1.80 | 2.00 | 1.45 |
| VLS252012ET-2R2M | 2.2 | ±20 | 1.0 | 0.154 | 0.129 | 1.55 | 1.75 | 1.30 |
| VLS252012ET-3R3M | 3.3 | ±20 | 1.0 | 0.272 | 0.227 | 1.25 | 1.40 | 0.98 |
| VLS252012ET-4R7M | 4.7 | ±20 | 1.0 | 0.405 | 0.338 | 1.05 | 1.20 | 0.81 |
| VLS252012ET-6R8M | 6.8 | ±20 | 1.0 | 0.612 | 0.510 | 0.85 | 0.95 | 0.65 |
| VLS252012ET-100M | 10 | ±20 | 1.0 | 0.756 | 0.630 | 0.73 | 0.82 | 0.59 |

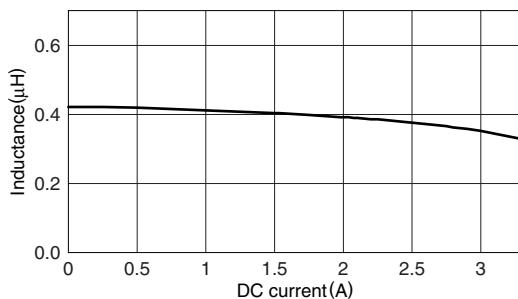
* Rated current: Value obtained when current flows and the temperature has risen to 40°C or when DC current flows and the nominal value of inductance has fallen by 30%, whichever is smaller.

• Operating temperature range: -40 to +105°C (Including self-temperature rise)


TYPICAL ELECTRICAL CHARACTERISTICS

INDUCTANCE vs. DC SUPERPOSITION CHARACTERISTICS

VLS252012ET-R47N










VLS252012ET-1R0N

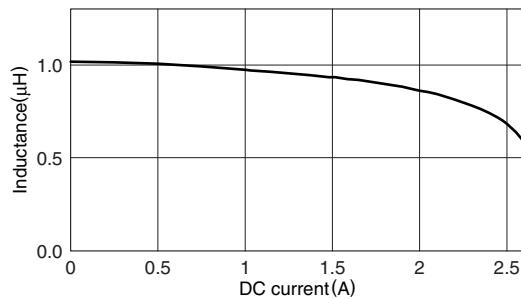

• Conformity to RoHS Directive: This means that, in conformity with EU Directive 2002/95/EC, lead, cadmium, mercury, hexavalent chromium, and specific bromine-based flame retardants, PBB and PBDE, have not been used, except for exempted applications.

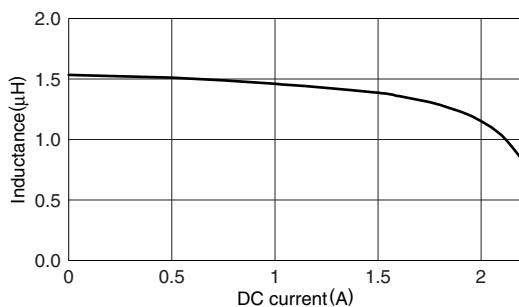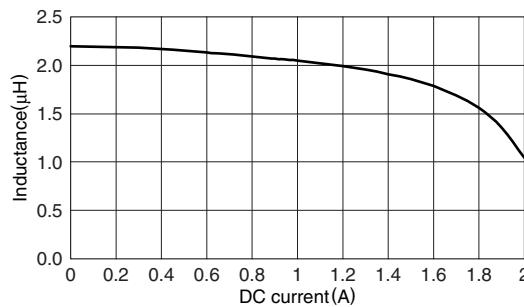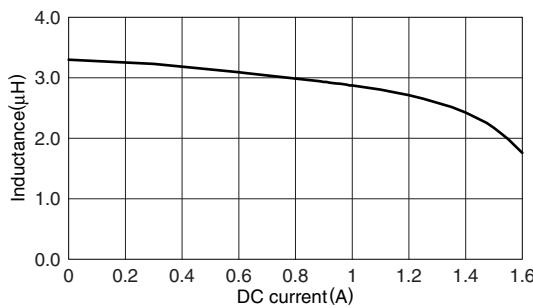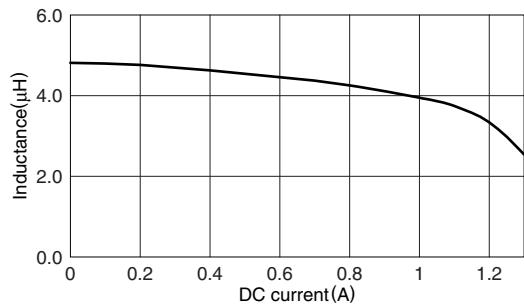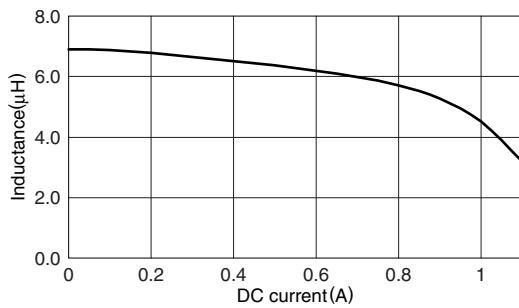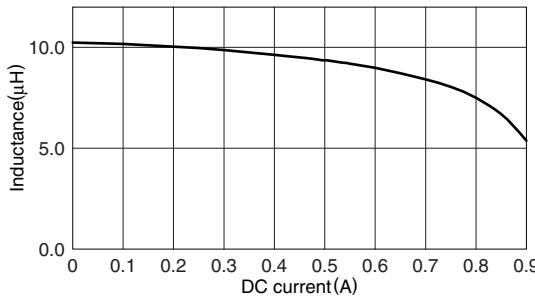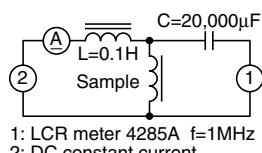• All specifications are subject to change without notice.

TYPICAL ELECTRICAL CHARACTERISTICS**INDUCTANCE vs. DC SUPERPOSITION CHARACTERISTICS****VLS252012ET-1R5N****VLS252012ET-2R2M****VLS252012ET-3R3M****VLS252012ET-4R7M****VLS252012ET-6R8M****VLS252012ET-100M****TEST CIRCUIT**

1: LCR meter 4285A f=1MHz
2: DC constant current

Inductors for Power Circuits

Wound/STD • Magnetic Shielded

Conformity to RoHS Directive

VLS Series VLS252015E

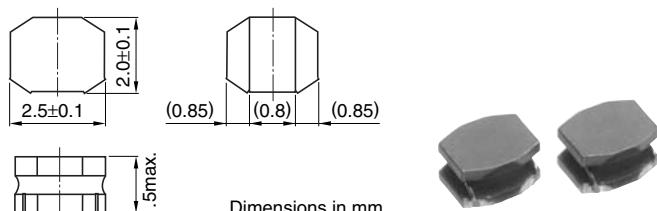
FEATURES

- Miniature size
Mount area: 2.5×2mm
Height: 1.5mm max.
- Generic use for portable DC to DC converter line.
- High magnetic shield construction should actualize high resolution for EMC protection.
- Available for automatic mounting in tape and reel package.
- The products do not contain lead and support lead-free soldering.

APPLICATIONS


DVCs, DSCs, PDAs, LCD displays, cellular phones, HDDs, etc.

SHAPES AND DIMENSIONS



Dimensions in mm

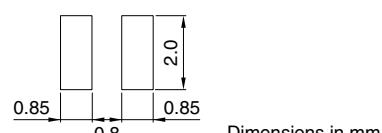RECOMMENDED PC BOARD PATTERN



Dimensions in mm

ELECTRICAL CHARACTERISTICS

| Part No. | Inductance (μ H) | Inductance tolerance (%) | Test frequency (MHz) | DC resistance (Ω) | | Rated current(A)* | | Based on temperature rise typ. |
|------------------|--------------------------|--------------------------------|-------------------------|-------------------------------|-------|-------------------|------|-----------------------------------|
| | | | | max. | typ. | max. | typ. | |
| VLS252015ET-1R0N | 1.0 | ±30 | 1.0 | 0.082 | 0.068 | 1.95 | 2.20 | 1.75 |
| VLS252015ET-1R5N | 1.5 | ±30 | 1.0 | 0.120 | 0.100 | 1.75 | 1.95 | 1.45 |
| VLS252015ET-2R2M | 2.2 | ±20 | 1.0 | 0.160 | 0.133 | 1.50 | 1.70 | 1.25 |
| VLS252015ET-3R3M | 3.3 | ±20 | 1.0 | 0.219 | 0.182 | 1.20 | 1.35 | 1.05 |
| VLS252015ET-4R7M | 4.7 | ±20 | 1.0 | 0.318 | 0.265 | 1.00 | 1.15 | 0.89 |
| VLS252015ET-6R8M | 6.8 | ±20 | 1.0 | 0.480 | 0.400 | 0.85 | 0.95 | 0.73 |
| VLS252015ET-100M | 10 | ±20 | 1.0 | 0.588 | 0.490 | 0.72 | 0.80 | 0.66 |

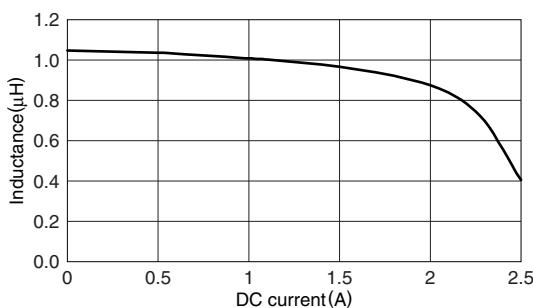
* Rated current: Value obtained when current flows and the temperature has risen to 40°C or when DC current flows and the nominal value of inductance has fallen by 30%, whichever is smaller.

• Operating temperature range: -40 to +105°C (Including self-temperature rise)


TYPICAL ELECTRICAL CHARACTERISTICS

INDUCTANCE vs. DC SUPERPOSITION CHARACTERISTICS

VLS252015ET-1R0N









VLS252015ET-1R5N

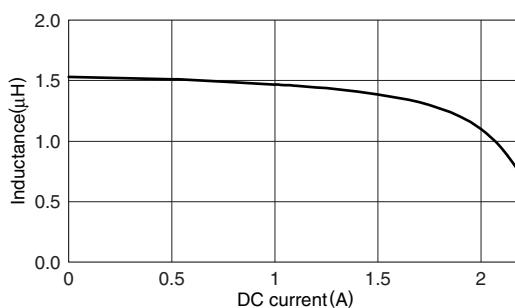

• Conformity to RoHS Directive: This means that, in conformity with EU Directive 2002/95/EC, lead, cadmium, mercury, hexavalent chromium, and specific bromine-based flame retardants, PBB and PBDE, have not been used, except for exempted applications.

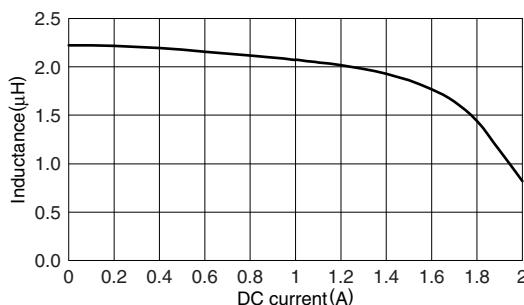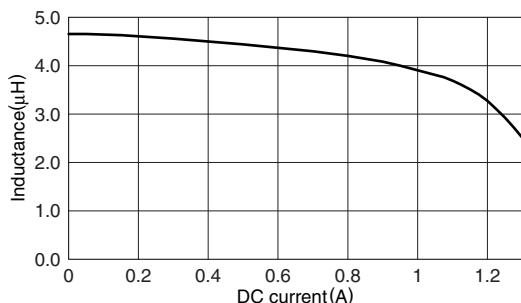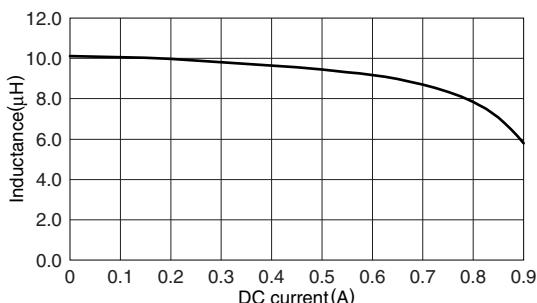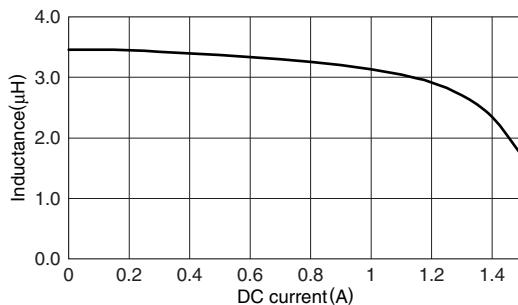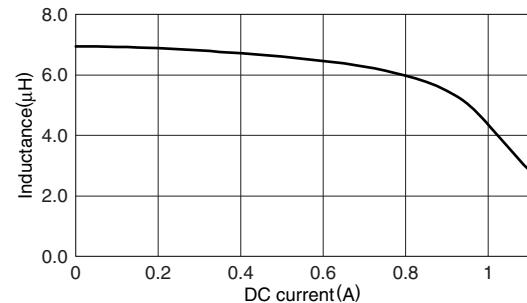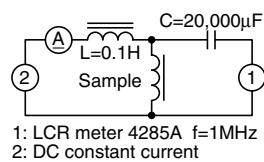• All specifications are subject to change without notice.

TYPICAL ELECTRICAL CHARACTERISTICS
INDUCTANCE vs. DC SUPERPOSITION CHARACTERISTICS
VLS252015ET-2R2M

VLS252015ET-4R7M

VLS252015ET-100M

VLS252015ET-3R3M

VLS252015ET-6R8M

TEST CIRCUIT


Inductors for Power Circuits

Wound/STD • Magnetic Shielded

Conformity to RoHS Directive

VLS Series VLS3010E

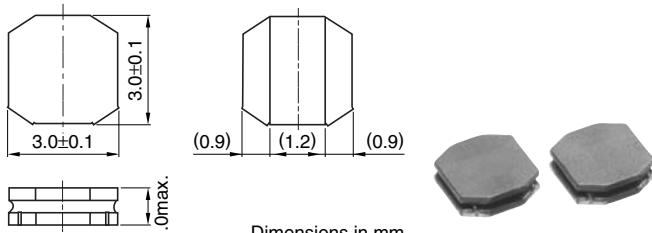
FEATURES

- Miniature size
Mount area: 3x3mm
Height: 1.0mm max.
- Generic use for portable DC to DC converter line.
- High magnetic shield construction should actualize high resolution for EMC protection.
- Available for automatic mounting in tape and reel package.
- The products do not contain lead and support lead-free soldering.

APPLICATIONS


Cellular phones, DVCs, DSCs, PDAs, LCD displays, HDDs, etc.

SHAPES AND DIMENSIONS



Dimensions in mm

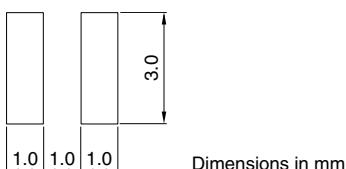RECOMMENDED PC BOARD PATTERN



Dimensions in mm

ELECTRICAL CHARACTERISTICS

| Part No. | Inductance (μ H) | Inductance tolerance (%) | Test frequency (MHz) | DC resistance (Ω) | | Rated current(A)* | | Based on temperature rise typ. |
|----------------|--------------------------|-----------------------------|-------------------------|-------------------------------|-------|-------------------|------|--------------------------------|
| | | | | max. | typ. | max. | typ. | |
| VLS3010ET-1R0N | 1.0 | ±30 | 1.0 | 0.072 | 0.060 | 1.60 | 1.80 | 2.10 |
| VLS3010ET-1R5N | 1.5 | ±30 | 1.0 | 0.085 | 0.071 | 1.35 | 1.50 | 1.90 |
| VLS3010ET-2R2M | 2.2 | ±20 | 1.0 | 0.116 | 0.097 | 1.20 | 1.30 | 1.70 |
| VLS3010ET-3R3M | 3.3 | ±20 | 1.0 | 0.156 | 0.130 | 1.00 | 1.10 | 1.50 |
| VLS3010ET-4R7M | 4.7 | ±20 | 1.0 | 0.204 | 0.170 | 0.81 | 0.90 | 1.30 |
| VLS3010ET-6R8M | 6.8 | ±20 | 1.0 | 0.312 | 0.260 | 0.69 | 0.77 | 1.00 |
| VLS3010ET-100M | 10 | ±20 | 1.0 | 0.468 | 0.390 | 0.56 | 0.63 | 0.80 |
| VLS3010ET-150M | 15 | ±20 | 1.0 | 0.612 | 0.510 | 0.48 | 0.54 | 0.70 |
| VLS3010ET-220M | 22 | ±20 | 1.0 | 0.900 | 0.750 | 0.38 | 0.43 | 0.60 |

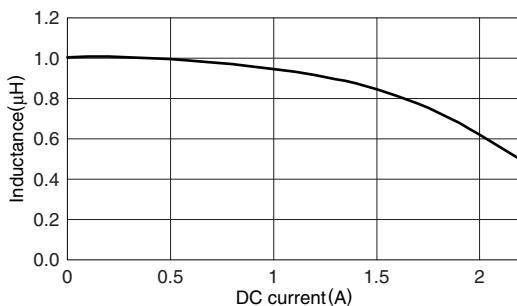
* Rated current: Value obtained when current flows and the temperature has risen to 40°C or when DC current flows and the nominal value of inductance has fallen by 30%, whichever is smaller.

• Operating temperature range: -40 to +105°C (Including self-temperature rise)


TYPICAL ELECTRICAL CHARACTERISTICS

INDUCTANCE vs. DC SUPERPOSITION CHARACTERISTICS

VLS3010ET-1R0N











VLS3010ET-1R5N

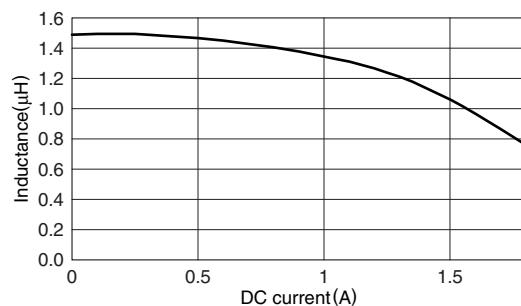

• Conformity to RoHS Directive: This means that, in conformity with EU Directive 2002/95/EC, lead, cadmium, mercury, hexavalent chromium, and specific bromine-based flame retardants, PBB and PBDE, have not been used, except for exempted applications.

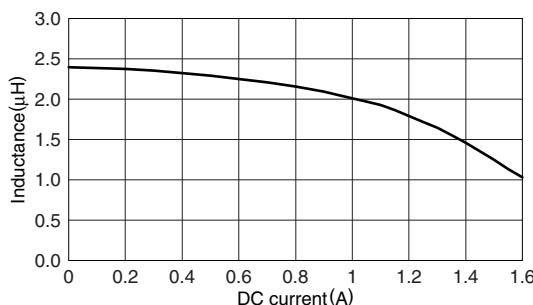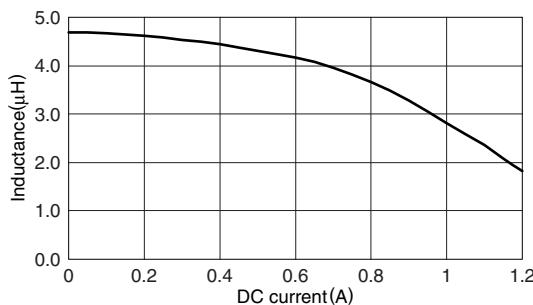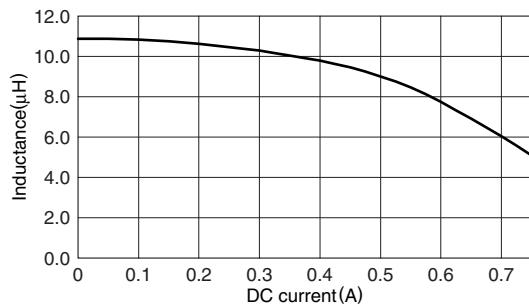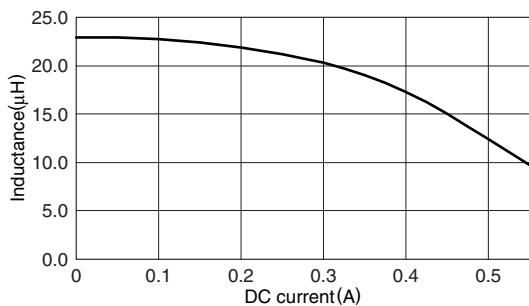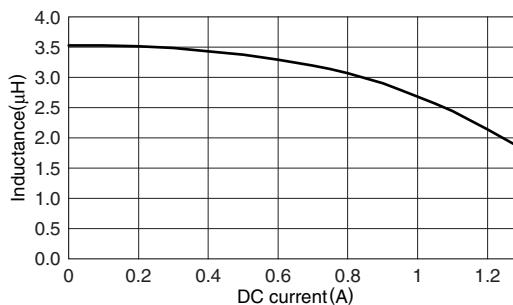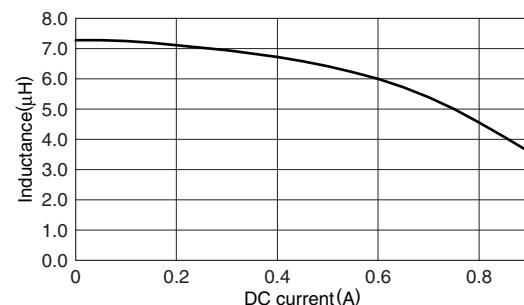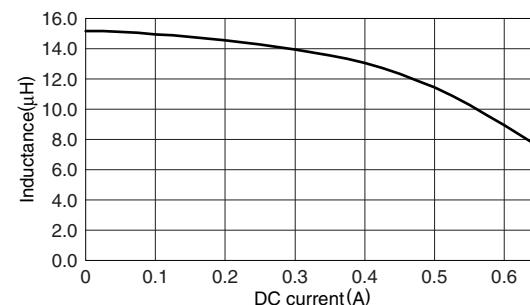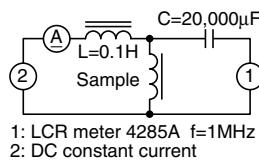• All specifications are subject to change without notice.

TYPICAL ELECTRICAL CHARACTERISTICS
INDUCTANCE vs. DC SUPERPOSITION CHARACTERISTICS
VLS3010ET-2R2M

VLS3010ET-4R7M

VLS3010ET-100M

VLS3010ET-220M

VLS3010ET-3R3M

VLS3010ET-6R8M

VLS3010ET-150M

TEST CIRCUIT


Inductors for Power Circuits

Wound/STD • Magnetic Shielded

Conformity to RoHS Directive

VLS Series VLS3012E

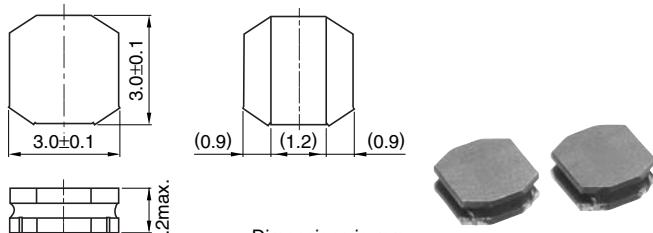
FEATURES

- Miniature size
Mount area: 3x3mm
Height: 1.2mm max.
- Generic use for portable DC to DC converter line.
- High magnetic shield construction should actualize high resolution for EMC protection.
- Available for automatic mounting in tape and reel package.
- The products do not contain lead and support lead-free soldering.

APPLICATIONS


DSCs, DVCs, PDAs, portable game devices, cellular phones, LCD displays, HDDs, etc.

SHAPES AND DIMENSIONS



Dimensions in mm

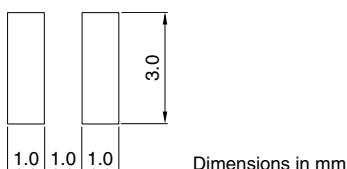RECOMMENDED PC BOARD PATTERN



Dimensions in mm

ELECTRICAL CHARACTERISTICS

| Part No. | Inductance (μ H) | Inductance tolerance (%) | Test frequency (MHz) | DC resistance (Ω) | | Rated current(A)* | | Based on temperature rise typ. |
|----------------|--------------------------|--------------------------------|-------------------------|-------------------------------|-------|-------------------|------|--------------------------------------|
| | | | | max. | typ. | max. | typ. | |
| VLS3012ET-1R0N | 1.0 | ±30 | 1.0 | 0.068 | 0.056 | 1.90 | 2.15 | 2.00 |
| VLS3012ET-1R5N | 1.5 | ±30 | 1.0 | 0.076 | 0.063 | 1.50 | 1.70 | 1.85 |
| VLS3012ET-2R2M | 2.2 | ±20 | 1.0 | 0.096 | 0.080 | 1.35 | 1.50 | 1.70 |
| VLS3012ET-3R3M | 3.3 | ±20 | 1.0 | 0.120 | 0.100 | 1.05 | 1.20 | 1.55 |
| VLS3012ET-4R7M | 4.7 | ±20 | 1.0 | 0.156 | 0.130 | 0.95 | 1.05 | 1.30 |
| VLS3012ET-6R8M | 6.8 | ±20 | 1.0 | 0.228 | 0.190 | 0.81 | 0.90 | 1.05 |
| VLS3012ET-100M | 10 | ±20 | 1.0 | 0.336 | 0.280 | 0.64 | 0.76 | 0.89 |
| VLS3012ET-150M | 15 | ±20 | 1.0 | 0.516 | 0.430 | 0.55 | 0.62 | 0.74 |
| VLS3012ET-220M | 22 | ±20 | 1.0 | 0.756 | 0.630 | 0.44 | 0.49 | 0.61 |
| VLS3012ET-330M | 33 | ±20 | 1.0 | 1.248 | 1.040 | 0.37 | 0.41 | 0.48 |
| VLS3012ET-470M | 47 | ±20 | 1.0 | 1.500 | 1.250 | 0.31 | 0.35 | 0.44 |

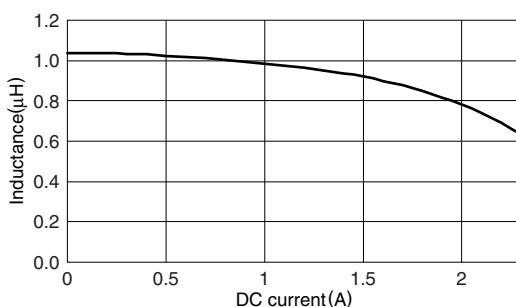
* Rated current: Value obtained when current flows and the temperature has risen to 40°C or when DC current flows and the nominal value of inductance has fallen by 30%, whichever is smaller.

• Operating temperature range: -40 to +105°C (Including self-temperature rise)


TYPICAL ELECTRICAL CHARACTERISTICS

INDUCTANCE vs. DC SUPERPOSITION CHARACTERISTICS

VLS3012ET-1R0N













VLS3012ET-1R5N

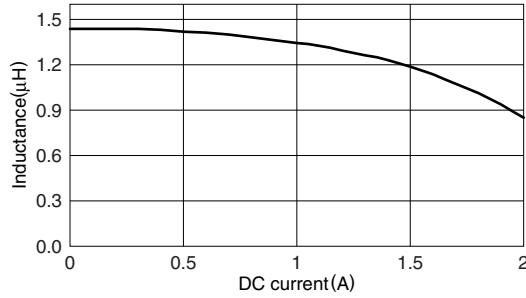

• Conformity to RoHS Directive: This means that, in conformity with EU Directive 2002/95/EC, lead, cadmium, mercury, hexavalent chromium, and specific bromine-based flame retardants, PBB and PBDE, have not been used, except for exempted applications.

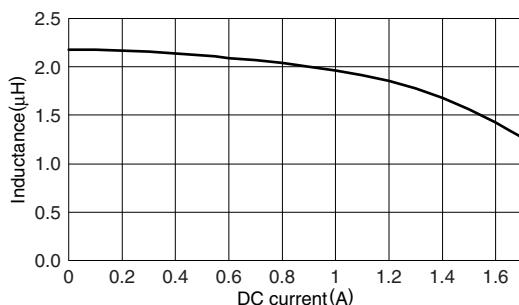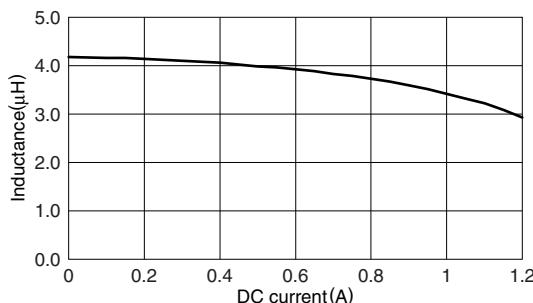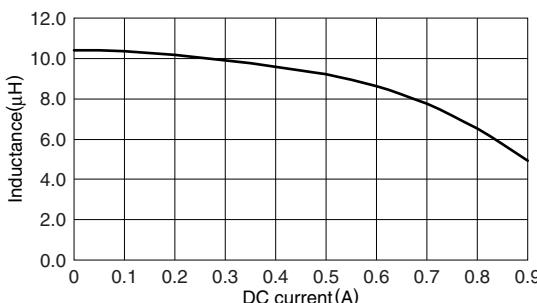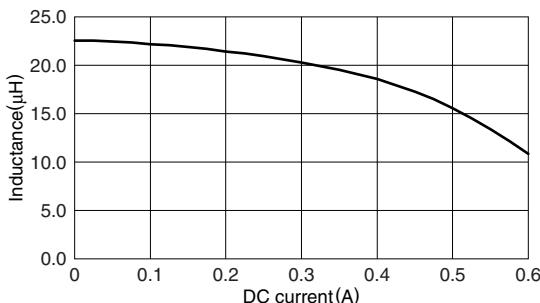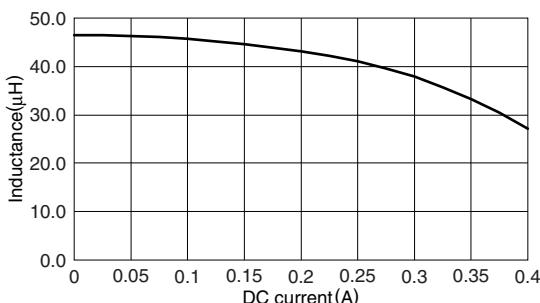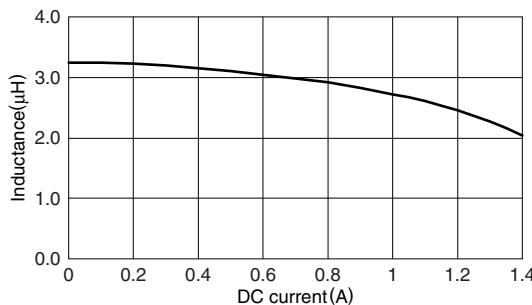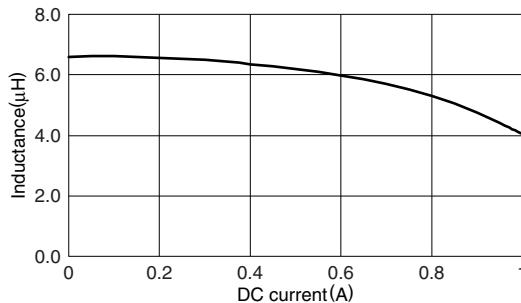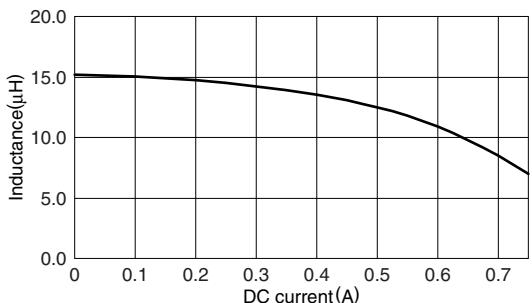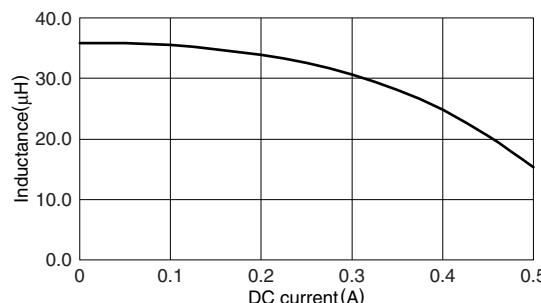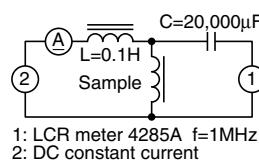• All specifications are subject to change without notice.

TYPICAL ELECTRICAL CHARACTERISTICS
INDUCTANCE vs. DC SUPERPOSITION CHARACTERISTICS
VLS3012ET-2R2M

VLS3012ET-4R7M

VLS3012ET-100M

VLS3012ET-220M

VLS3012ET-470M

VLS3012ET-3R3M

VLS3012ET-6R8M

VLS3012ET-150M

VLS3012ET-330M

TEST CIRCUIT


1: LCR meter 4285A f=1MHz
2: DC constant current

Inductors for Power Circuits

Wound/STD • Magnetic Shielded

Conformity to RoHS Directive

VLS Series VLS3015E

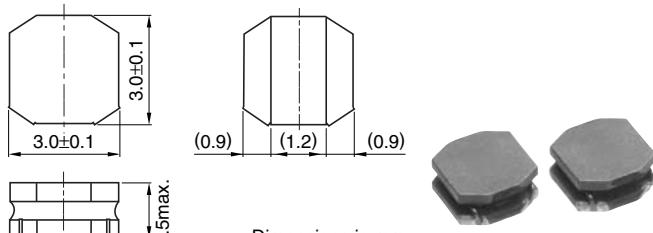
FEATURES

- Miniature size
Mount area: 3x3mm
Height: 1.5mm max.
- Generic use for portable DC to DC converter line.
- High magnetic shield construction should actualize high resolution for EMC protection.
- Available for automatic mounting in tape and reel package.
- The products do not contain lead and support lead-free soldering.

APPLICATIONS

DSCs, DVCs, PDAs, portable game devices, cellular phones, LCD displays, HDDs, etc.


SHAPES AND DIMENSIONS



Dimensions in mm



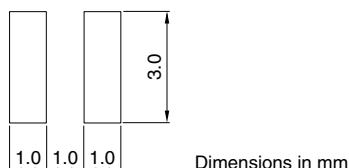RECOMMENDED PC BOARD PATTERN



Dimensions in mm

ELECTRICAL CHARACTERISTICS

| Part No. | Inductance (μ H) | Inductance tolerance (%) | Test frequency (MHz) | DC resistance (Ω) | | Rated current(A)* | | Based on temperature rise typ. |
|----------------|--------------------------|--------------------------------|-------------------------|-------------------------------|-------|-------------------|------|--------------------------------------|
| | | | | max. | typ. | max. | typ. | |
| VLS3015ET-1R0N | 1.0 | ±30 | 1.0 | 0.058 | 0.048 | 2.00 | 2.20 | 2.10 |
| VLS3015ET-1R5N | 1.5 | ±30 | 1.0 | 0.075 | 0.062 | 1.50 | 1.70 | 1.85 |
| VLS3015ET-2R2M | 2.2 | ±20 | 1.0 | 0.084 | 0.070 | 1.35 | 1.50 | 1.75 |
| VLS3015ET-3R3M | 3.3 | ±20 | 1.0 | 0.112 | 0.093 | 1.15 | 1.30 | 1.50 |
| VLS3015ET-4R7M | 4.7 | ±20 | 1.0 | 0.136 | 0.113 | 1.00 | 1.10 | 1.35 |
| VLS3015ET-6R8M | 6.8 | ±20 | 1.0 | 0.216 | 0.180 | 0.92 | 1.00 | 1.05 |
| VLS3015ET-100M | 10 | ±20 | 1.0 | 0.288 | 0.240 | 0.70 | 0.78 | 0.94 |
| VLS3015ET-150M | 15 | ±20 | 1.0 | 0.456 | 0.380 | 0.58 | 0.65 | 0.75 |
| VLS3015ET-220M | 22 | ±20 | 1.0 | 0.660 | 0.550 | 0.48 | 0.54 | 0.62 |
| VLS3015ET-330M | 33 | ±20 | 1.0 | 0.984 | 0.820 | 0.39 | 0.43 | 0.51 |
| VLS3015ET-470M | 47 | ±20 | 1.0 | 1.500 | 1.250 | 0.32 | 0.35 | 0.41 |

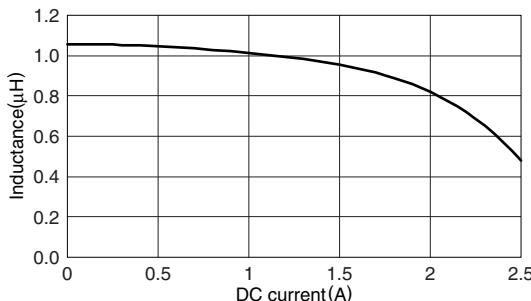
* Rated current: Value obtained when current flows and the temperature has risen to 40°C or when DC current flows and the nominal value of inductance has fallen by 30%, whichever is smaller.

• Operating temperature range: -40 to +105°C (Including self-temperature rise)


TYPICAL ELECTRICAL CHARACTERISTICS

INDUCTANCE vs. DC SUPERPOSITION CHARACTERISTICS

VLS3015ET-1R0N













VLS3015ET-1R5N

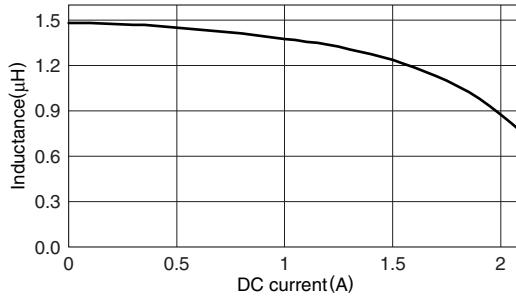

• Conformity to RoHS Directive: This means that, in conformity with EU Directive 2002/95/EC, lead, cadmium, mercury, hexavalent chromium, and specific bromine-based flame retardants, PBB and PBDE, have not been used, except for exempted applications.

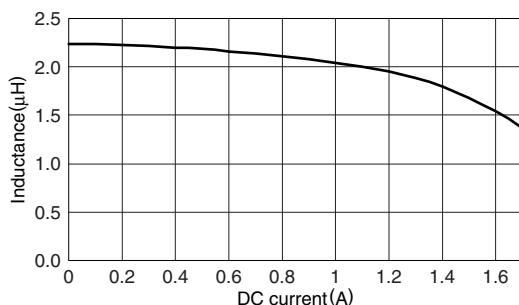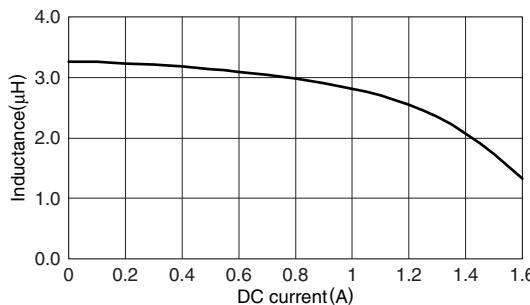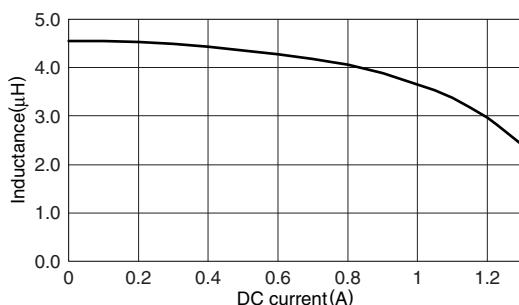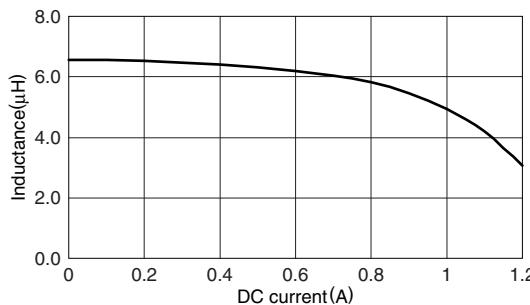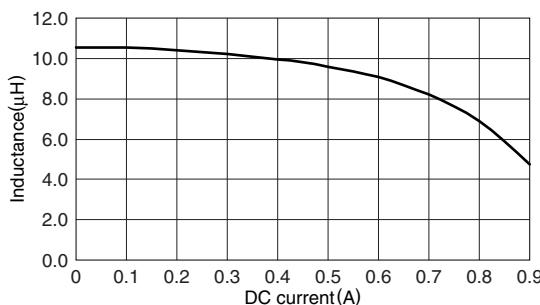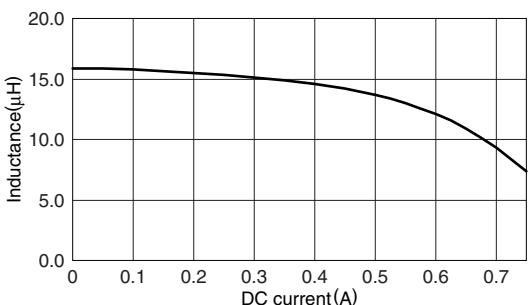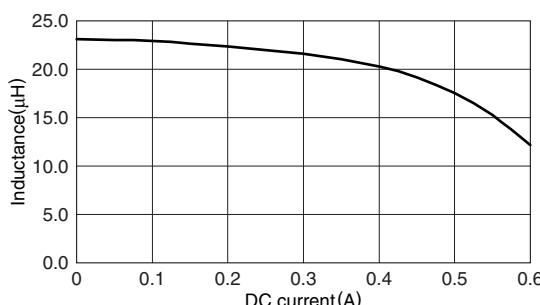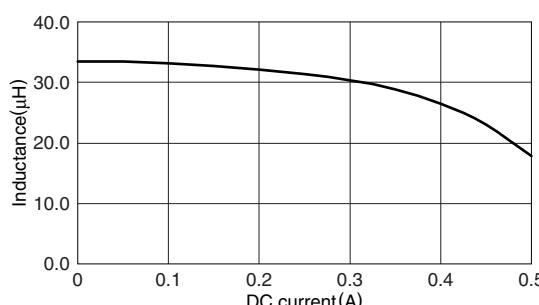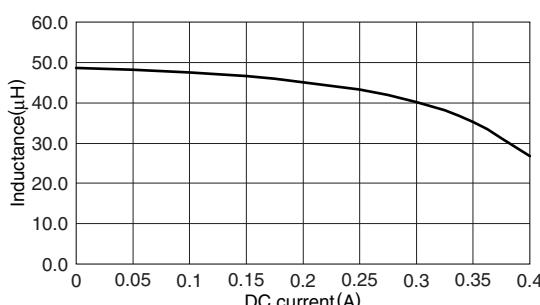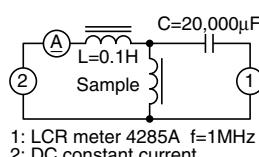• All specifications are subject to change without notice.

TYPICAL ELECTRICAL CHARACTERISTICS
INDUCTANCE vs. DC SUPERPOSITION CHARACTERISTICS
VLS3015ET-2R2M

VLS3015ET-3R3M

VLS3015ET-4R7M

VLS3015ET-6R8M

VLS3015ET-100M

VLS3015ET-150M

VLS3015ET-220M

VLS3015ET-330M

VLS3015ET-470M

TEST CIRCUIT


1: LCR meter 4285A f=1MHz
2: DC constant current

Inductors for Power Circuits

Wound/STD • Magnetic Shielded

Conformity to RoHS Directive

VLS Series VLS4012E

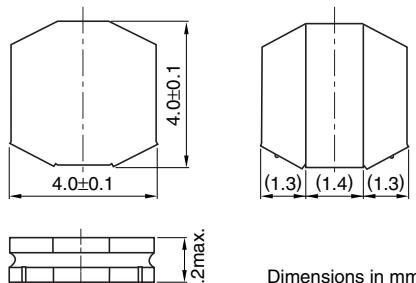
FEATURES

- Miniature size
Mount area: 4×4mm
Height: 1.2mm max.
- Generic use for portable DC to DC converter line.
- High magnetic shield construction should actualize high resolution for EMC protection.
- Available for automatic mounting in tape and reel package.
- The products do not contain lead and support lead-free soldering.

APPLICATIONS


Cellular phones, DVCs, DSCs, PDAs, LCD displays, HDDs, etc.

SHAPES AND DIMENSIONS



Dimensions in mm

RECOMMENDED PC BOARD PATTERN



Dimensions in mm



ELECTRICAL CHARACTERISTICS

| Part No. | Inductance (μ H) | Inductance tolerance (%) | Test frequency (MHz) | DC resistance (Ω) | | Rated current(A)* | | Based on temperature rise typ. |
|----------------|--------------------------|--------------------------------|-------------------------|-------------------------------|-------|-------------------|------|--------------------------------------|
| | | | | max. | typ. | max. | typ. | |
| VLS4012ET-1R0N | 1.0 | ±30 | 1.0 | 0.060 | 0.050 | 2.50 | 2.80 | 2.65 |
| VLS4012ET-1R5N | 1.5 | ±30 | 1.0 | 0.072 | 0.060 | 2.10 | 2.30 | 2.45 |
| VLS4012ET-2R2M | 2.2 | ±20 | 1.0 | 0.081 | 0.067 | 1.70 | 1.90 | 2.20 |
| VLS4012ET-3R3M | 3.3 | ±20 | 1.0 | 0.102 | 0.085 | 1.40 | 1.60 | 2.00 |
| VLS4012ET-4R7M | 4.7 | ±20 | 1.0 | 0.118 | 0.098 | 1.20 | 1.40 | 1.90 |
| VLS4012ET-6R8M | 6.8 | ±20 | 1.0 | 0.156 | 0.130 | 1.00 | 1.20 | 1.60 |
| VLS4012ET-100M | 10 | ±20 | 1.0 | 0.228 | 0.190 | 0.89 | 0.99 | 1.33 |
| VLS4012ET-150M | 15 | ±20 | 1.0 | 0.372 | 0.310 | 0.70 | 0.78 | 1.05 |
| VLS4012ET-220M | 22 | ±20 | 1.0 | 0.468 | 0.390 | 0.63 | 0.70 | 0.95 |
| VLS4012ET-330M | 33 | ±20 | 1.0 | 0.804 | 0.670 | 0.47 | 0.53 | 0.70 |
| VLS4012ET-470M | 47 | ±20 | 1.0 | 1.020 | 0.850 | 0.41 | 0.46 | 0.61 |

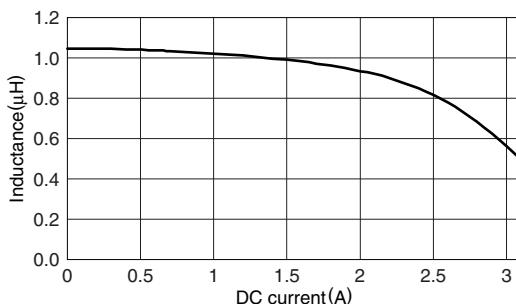
* Rated current: Value obtained when current flows and the temperature has risen to 40°C or when DC current flows and the nominal value of inductance has fallen by 30%, whichever is smaller.

- Operating temperature range: -40 to +105°C (Including self-temperature rise)


TYPICAL ELECTRICAL CHARACTERISTICS

INDUCTANCE vs. DC SUPERPOSITION CHARACTERISTICS

VLS4012ET-1R0N













VLS4012ET-1R5N

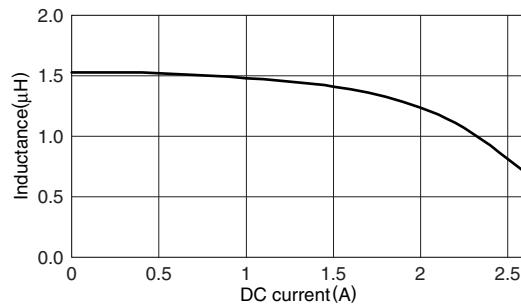

- Conformity to RoHS Directive: This means that, in conformity with EU Directive 2002/95/EC, lead, cadmium, mercury, hexavalent chromium, and specific bromine-based flame retardants, PBB and PBDE, have not been used, except for exempted applications.

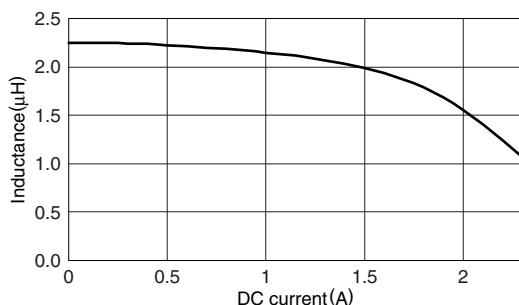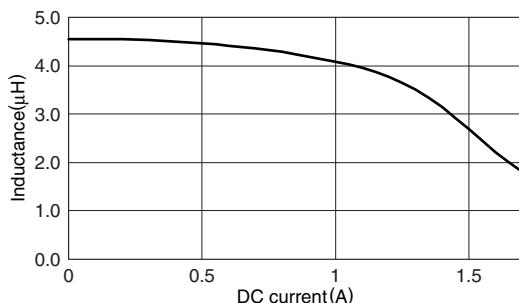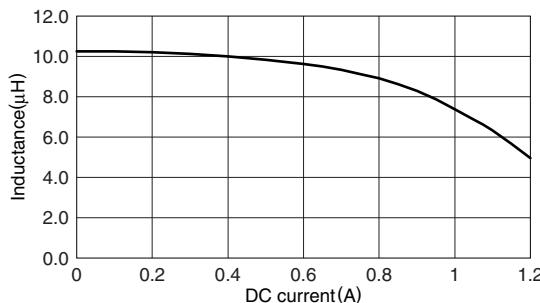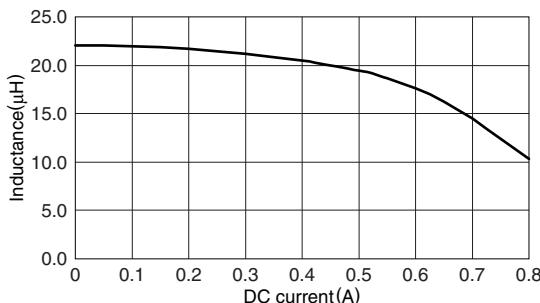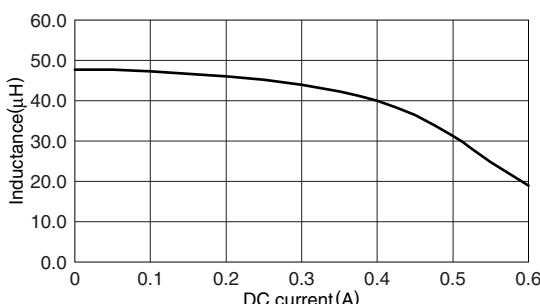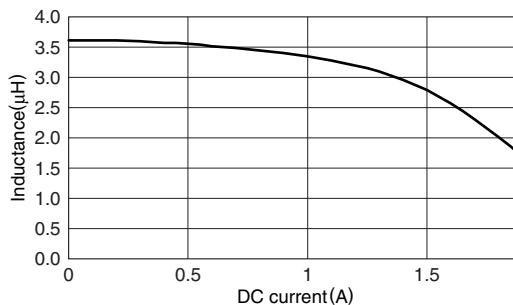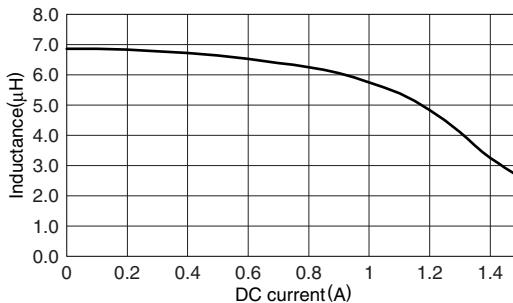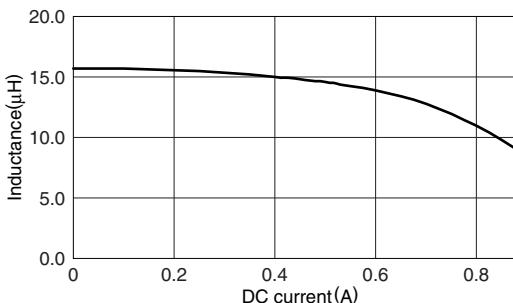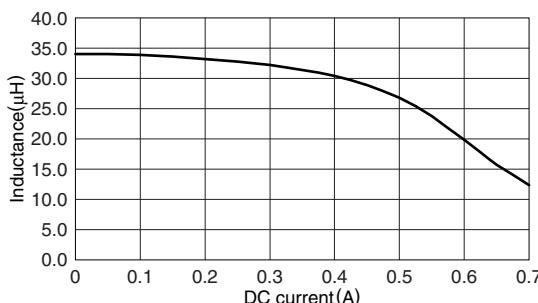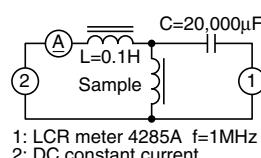- All specifications are subject to change without notice.

TYPICAL ELECTRICAL CHARACTERISTICS
INDUCTANCE vs. DC SUPERPOSITION CHARACTERISTICS
VLS4012ET-2R2M

VLS4012ET-4R7M

VLS4012ET-100M

VLS4012ET-220M

VLS4012ET-470M

VLS4012ET-3R3M

VLS4012ET-6R8M

VLS4012ET-150M

VLS4012ET-330M

TEST CIRCUIT


1: LCR meter 4285A f=1MHz
2: DC constant current