
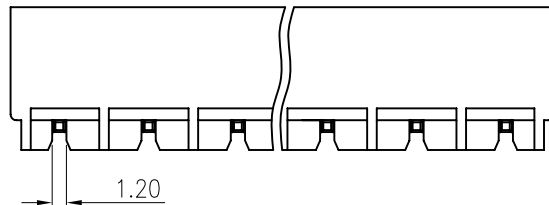
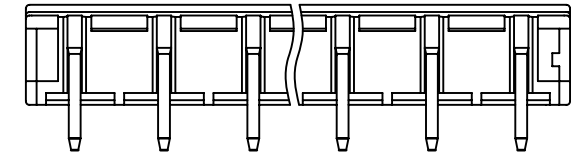

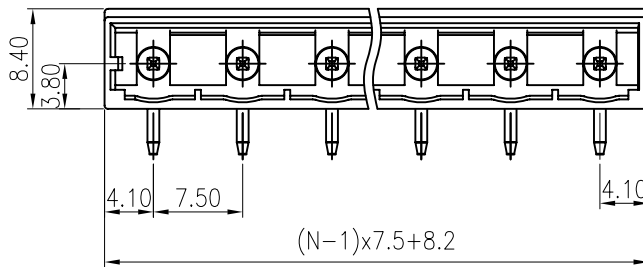



REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE
△	10-0017	8EDGV/RC-7.5-塑体由T0改为T1	HXC	04/07/10
△	10-0360	增加“VDE”认证标志	Finhai. Lan	09/04/10

Notes:

1. Pitch:7.5mm , Poles:2-12P
2. Rated voltage/current:UL 300V/15A  
VDE 400V/20A △
3. Operation temperatures:-40°C~+105°C
4. Withstanding Voltage:AC2500V/1min
5. Insulation Resistance:5000MΩ/DC1000V
6. Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm					—	
to	over	to	over	to	over	to	—	
6	10	10	24	30	60	100	150	□
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

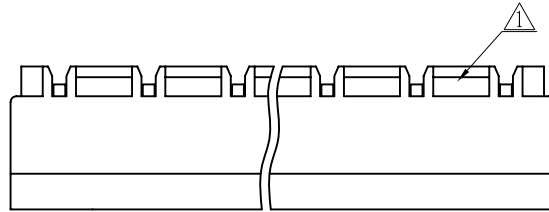

2	2EDGR Pin header	1008B00040 (H)	XX	Brass	SnCe
1	8EDGV/RC-7.5 Housing △	1122A41XXA (H)	1	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
TOLERANCES EXCEPT AS NOTED		DF TO Zhwmm	DATE 05/04/08'	宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD	
MM (INCH)		CHKD	DATE	NAME	
MM		MFD	DATE	8EDGRC-7.5-XXP-11-01A(H)	
.0 ±		APPVL	DATE	DRAWING NO. 8EDGRC-7.5-E01	
.00 ±		MATERIAL :		SIZE	REV
.000 ±		G.E. :		A4	T2
ANGLES ± 1°		FINISH:		/PART NO.	
THIRD ANGLE PROJECTION		SCALE : 1:1		DO NOT SCALE DRAWING	
				SHEET 1	OF 1