




Part Number:





MS-050040-2

Revision 2021-Dec-01 - Generated 2021-Dec-01

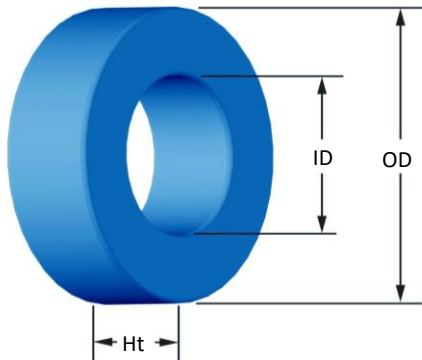

(If coated, Max./Min. includes coating)

OD	(nom. - bare core) (max.)	12.70 mm 13.46 mm	0.500 in 0.530 in
ID	(nom. - bare core) (min.)	7.62 mm 6.99 mm	0.300 in 0.275 in
HT	(nom. - bare core) (max.)	4.75 mm 5.51 mm	0.187 in 0.217 in
Mass	(approximate)	1.9 grams	
Magnetic Dimensions	A _e - Eff. Mag. Cross Section	0.114 cm ²	
	L _e - Eff. Mag. Path Length	3.12 cm	
	V _e - Eff. Core Volume	0.356 cm ³	
	WA - Min. Eff. Window Area	0.384 cm ²	
	sa - Surface Area	6.67 cm ²	
Inductance	mlt - mean length per turn	2.10 cm	
	μ _i (reference)	40	
	A _L value (nominal)	18 nH/N ²	
	Test Winding	N=50, #28 AWG	
	Frequency	10 kHz	
Core Loss	Voltage on Agilent 4284A	0.025 V	
	AL tolerance	±8%	
	$\text{Core Loss (mW/cm}^3\text{)} = \frac{a}{B_{pk}^3} + \frac{b}{B_{pk}^{2.3}} + \frac{c}{B_{pk}^{1.65}} + d \cdot B_{pk}^2 \cdot f^2$		
	where B _{pk} expressed in gauss, f expressed in hertz, and: a=1.000E+06, b=6.961E+08, c=5.397E+06, d=4.127E-14		
	B _{pk}	1000 G	
DC Saturation	frequency	50 kHz	
	Core Loss (nominal)	441 mW/cm ³	
	Core Loss (maximum)	507 mW/cm ³	
	$\% \mu_i = \frac{1}{a + b \cdot H^c} + d$		
	where H expressed in oersteds, and: a=1.000E-02, b=2.655E-06, c=1.703, d=0.000		
Coating/Pkg	H _{DC}	100 Oe	
	Percent Initial Perm(nom.)	59.6%	
	Percent Initial Perm(min.)	52.0%	
	Coating Type:	Blue Epoxy	
	Voltage Breakdown (min.)	1000 Vrms	
Winding Table	Limit	0.1 mA, 5 s	
	Package Quantity	5,400 Pcs/Box	
	Wire Size	AWG	16
		mm	1.250
	Single Layer	Turns	11
		Rdc(Ω)	3.0 m
	Full Winding	Turns	12
		Rdc(Ω)	3.3 m

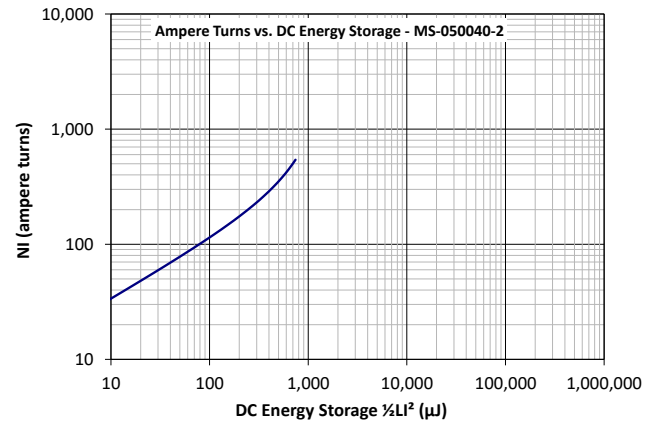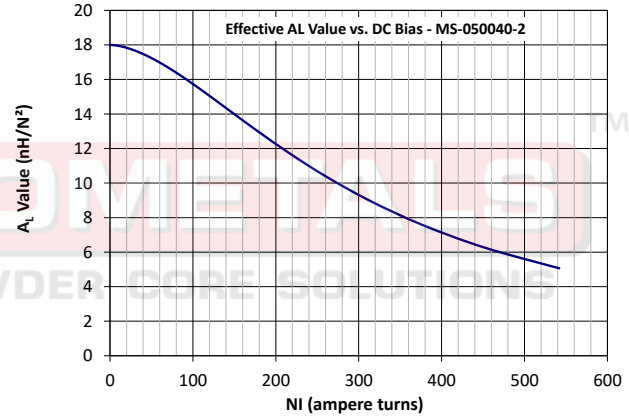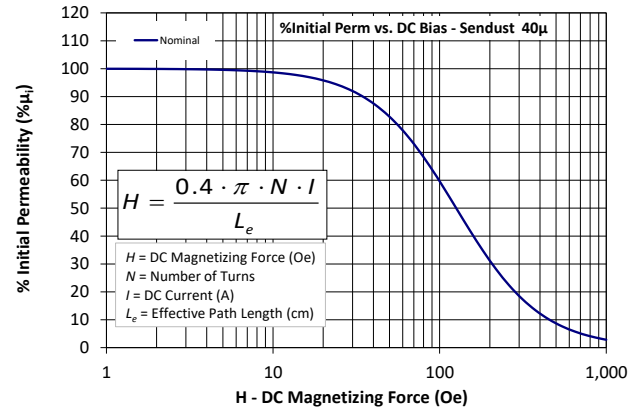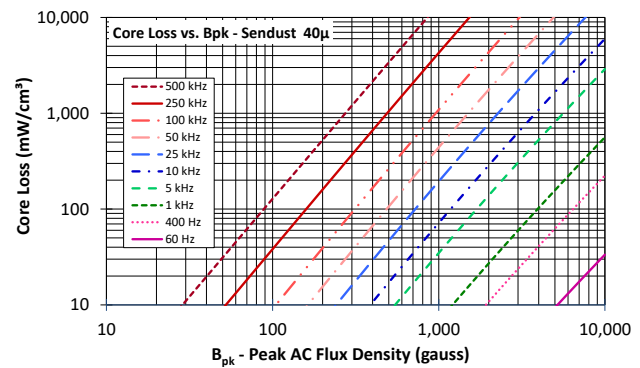

Winding Table	Wire Size	AWG	16	18	20	22	24	26	28	30	32	34	36
		mm	1.250	1.000	0.800	0.630	0.500	0.400	0.315	0.250	0.200	0.160	0.125
	Single Layer	Turns	11	15	19	24	31	39	50	63	79	98	123
		Rdc(Ω)	3.0 m	6.6 m	13.3 m	26.6 m	54.7 m	109.5 m	223.3 m	447.5 m	892.5 m	1.8	3.5
Full Winding	Full Winding	Turns	12	18	28	43	66	102	158	245	380	587	909
		Rdc(Ω)	3.3 m	7.9 m	19.5 m	47.7 m	116.6 m	286.5 m	705.7 m	1.7	4.3	10.5	26.0