




Part Number:

MS-130014-2

Revision:





2023-Dec-06

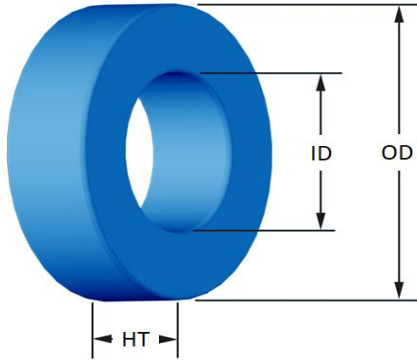

(If coated, Max./Min. includes coating)

		mm	in
OD	(nom. - bare core)	33.02	1.300
	(max.)	33.83	1.332
ID	(nom. - bare core)	19.94	0.785
	(min.)	19.30	0.760
HT	(nom. - bare core)	10.67	0.420
	(max.)	11.61	0.457

Magnetic Dimensions	Mass (approximate)	27	grams
	A_e - Eff. Mag. Cross Section	0.672	cm ²
	L_e - Eff. Mag. Path Length	8.15	cm
	V_e - Eff. Core Volume	5.48	cm ³
	WA - Min. Eff. Window Area	2.93	cm ²
	sa - Surface Area	40.1	cm ²
Inductance	mlt - mean length per turn	4.74	cm
	μ_i (reference)	14	
	A_L value (nominal)	14	nH/N ²
	Test Winding	70 Turns	AWG# 22
	Frequency	10k	Hz
	Voltage on Agilent 4284A	0.21	V
Core Loss	AL tolerance	±8%	
	$\text{Core Loss (mW/cm}^3\text{)} = \frac{a}{B_{pk}^3} + \frac{b}{B_{pk}^{2.3}} + \frac{c}{B_{pk}^{1.65}} + d \cdot B_{pk}^2 \cdot f^2$		
	where B_{pk} expressed in gauss, f expressed in hertz, and:		
	$a=1.000E+06$, $b=1.814E+08$, $c=3.377E+06$, $d=2.628E-14$		
	B_{pk}	300	G
	frequency	100 k	Hz
DC Saturation	Core Loss (nominal)	180	mW/cm ³
	Core Loss (maximum)	207	mW/cm ³
	$\% \mu_i = \frac{1}{a + b \cdot H^c} + d$		
	where H expressed in oersteds, and:		
	$a=1.000E-02$, $b=9.443E-07$, $c=1.533$, $d=0.000$		
	H_{DC}	200	Oe
Coating/Pkg	Percent Initial Perm(nom.)	75.9	%
	Percent Initial Perm(min.)	70.4	%
	Coating Type:	Blue Epoxy	
	Voltage Breakdown (min.)	1000	Vrms
Winding Table	Limit	0.1 mA, 5 s	
	Package Quantity	336 Pcs/Box	
	Wire Size	AWG	8
		mm	3.150
Single Layer	Turns	14	18
	Rdc(Ω)	1.4 m	2.8 m
Full Winding	Turns	15	24
	Rdc(Ω)	1.5 m	3.7 m

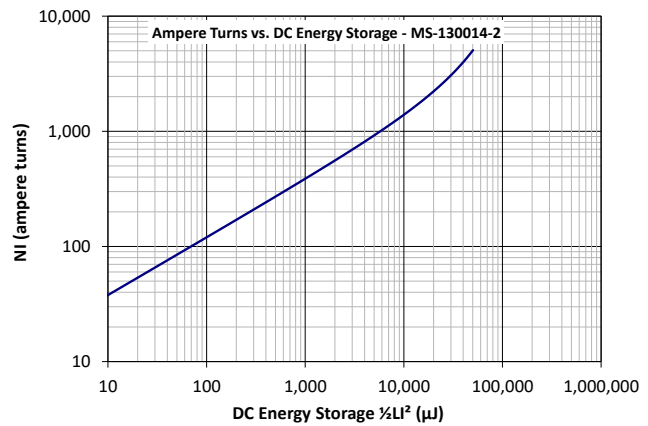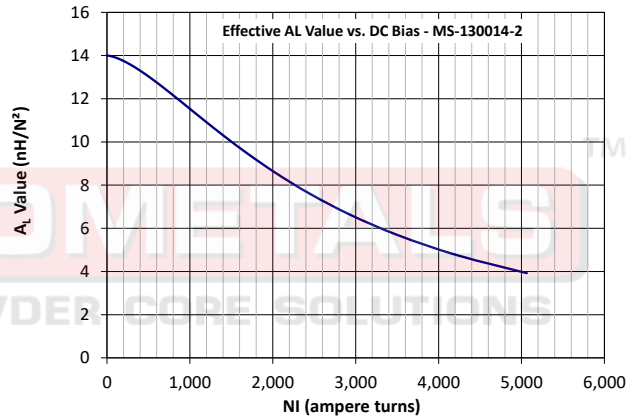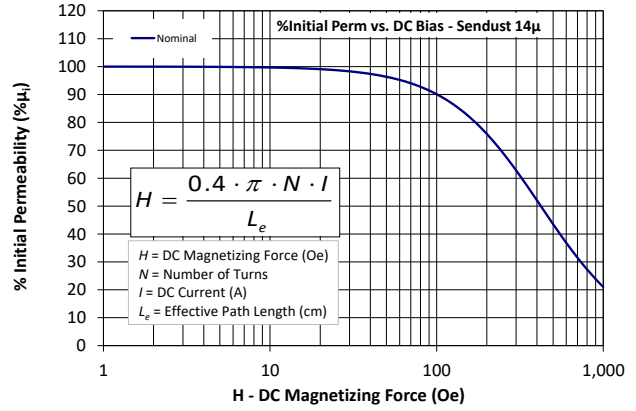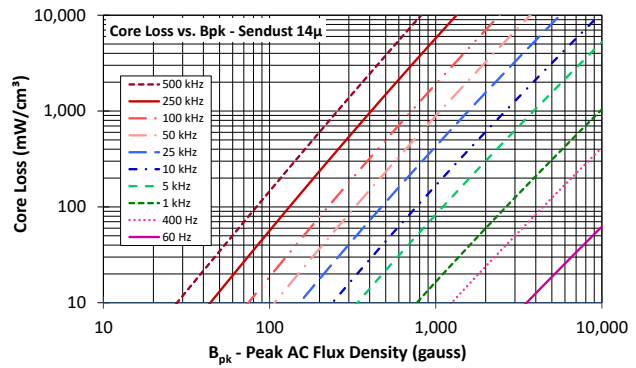

Winding Table	Wire Size	AWG	8	10	12	14	16	18	20	22	24	26	28
		mm	3.150	2.500	2.000	1.600	1.250	1.000	0.800	0.630	0.500	0.400	0.315
	Single Layer	Turns	14	18	22	29	36	46	58	73	91	114	142
		Rdc(Ω)	1.4 m	2.8 m	5.4 m	11.4 m	22.4 m	45.6 m	91.5 m	183.1 m	363.0 m	723.2 m	1.4
Full Winding	Turns	15	24	37	57	88	136	211	326	504	780	1,208	
		Rdc(Ω)	1.5 m	3.7 m	9.1 m	22.3 m	54.9 m	134.9 m	332.8 m	817.6 m	2.0	4.9	12.2