




Part Number:

MS-226040-2H305

Revision:

2023-Dec-18

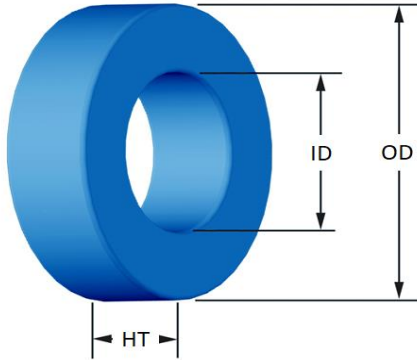

(If coated, Max./Min. includes coating)

		mm	in
OD	(nom. - bare core)	57.15	2.250
	(max.)	58.04	2.285
ID	(nom. - bare core)	26.39	1.039
	(min.)	25.58	1.007
HT	(nom. - bare core)	30.48	1.200
	(max.)	31.37	1.235
Mass	(approximate)	310	grams
Magnetic Dimensions	A _e - Eff. Mag. Cross Section	4.57	cm ²
	L _e - Eff. Mag. Path Length	12.506	cm
	V _e - Eff. Core Volume	57.2	cm ³
	W _A - Min. Eff. Window Area	5.14	cm ²
	s _a - Surface Area	136	cm ²
	mlt - mean length per turn	10.8	cm
Inductance	μ _i (reference)	40	
	A _L value (nominal)	184	nH/N ²
	Test Winding	60 Turns	AWG# 18
	Frequency	10k	Hz
	Voltage on Agilent 4284A	1.2	V
	AL tolerance	±8%	
Core Loss	$\text{Core Loss (mW/cm}^3\text{)} = \frac{a}{B_{pk}^3} + \frac{b}{B_{pk}^{2.3}} + \frac{c}{B_{pk}^{1.65}} + d \cdot B_{pk}^2 \cdot f^2$		
	where B _{pk} expressed in gauss, f expressed in hertz, and:		
	a=1.000E+06, b=6.961E+08, c=5.397E+06, d=4.127E-14		
	B _{pk}	1000	G
	frequency	50 k	Hz
	Core Loss (nominal)	441	mW/cm ³
DC Saturation	$\% \mu_i = \frac{1}{a + b \cdot H^c} + d$		
	where H expressed in oersteds, and:		
	a=1.000E-02, b=2.655E-06, c=1.703, d=0.000		
	H _{dc}	100	Oe
	Percent Initial Perm(nom.)	59.6	%
	Percent Initial Perm(min.)	52.0	%
Coating/Pkg	Coating Type:	Blue Epoxy	
	Voltage Breakdown (min.)	1000 Vrms	
	Limit	0.1 mA, 5 s	
	Package Quantity	36 Pcs/Box	

Winding Table	Wire Size	AWG	8	10	12	14	16	18	20	22	24	26	28
		mm	3.150	2.500	2.000	1.600	1.250	1.000	0.800	0.630	0.500	0.400	0.315
	Single Layer	Turns	19	24	31	39	49	62	78	97	122	152	190
	Full Winding	Turns	27	42	64	100	154	239	370	572	886	1,371	2,122
		Rdc(Ω)	4.2 m	8.5 m	17.4 m	34.8 m	69.6 m	140.1 m	280.3 m	554.3 m	1.1	2.2	4.4
		Rdc(Ω)	6.0 m	14.8 m	35.9 m	89.3 m	218.8 m	539.9 m	1.3	3.3	8.1	19.8	48.8

