




Part Number:

MS-184160-2

Revision:

2023-Dec-06

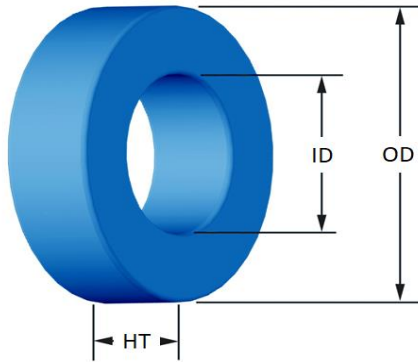

(If coated, Max./Min. includes coating)

		mm	in
OD	(nom. - bare core)	46.74	1.840
	(max.)	47.63	1.875
ID	(nom. - bare core)	24.13	0.950
	(min.)	23.32	0.918
HT	(nom. - bare core)	18.03	0.710
	(max.)	18.92	0.745
Mass	(approximate)	130	grams
Magnetic Dimensions	A_e - Eff. Mag. Cross Section	1.99	cm ²
	L_e - Eff. Mag. Path Length	10.743	cm
	V_e - Eff. Core Volume	21.4	cm ³
	W_A - Min. Eff. Window Area	4.27	cm ²
	s_a - Surface Area	81.7	cm ²
	mlt - mean length per turn	7.38	cm
Inductance	μ_i (reference)	160	
	A_L value (nominal)	360	nH/N ²
	Test Winding	70 Turns	AWG# 20
	Frequency	10k	Hz
	Voltage on Agilent 4284A	0.62	V
	AL tolerance	±8%	
Core Loss	$\text{Core Loss (mW/cm}^3\text{)} = \frac{a}{B_{pk}^3} + \frac{b}{B_{pk}^{2.3}} + \frac{c}{B_{pk}^{1.65}} + d \cdot B_{pk}^2 \cdot f^2$		
	where B_{pk} expressed in gauss, f expressed in hertz, and:		
	$a=1.394E+10$, $b=1.034E+09$, $c=1.244E+07$, $d=4.007E-14$		
	B_{pk}	1000	G
	frequency	50 k	Hz
	Core Loss (nominal)	276	mW/cm ³
DC Saturation	$\% \mu_i = \frac{1}{a + b \cdot H^c} + d$		
	where H expressed in oersteds, and:		
	$a=1.000E-02$, $b=4.439E-05$, $c=1.627$, $d=0.000$		
	H_{dc}	40	Oe
	Percent Initial Perm(nom.)	35.8	%
	Percent Initial Perm(min.)	29.3	%
Coating/Pkg	Coating Type:	Blue Epoxy	
	Voltage Breakdown (min.)	1000 Vrms	
	Limit	0.1 mA, 5 s	
	Package Quantity	80 Pcs/Box	

Winding Table	Wire Size	AWG	8	10	12	14	16	18	20	22	24	26	28
		mm	3.150	2.500	2.000	1.600	1.250	1.000	0.800	0.630	0.500	0.400	0.315
	Single Layer	Turns	17	22	28	35	45	56	70	88	111	138	173
	Full Winding	Rdc(Ω)	2.6 m	5.3 m	10.7 m	21.4 m	43.7 m	86.5 m	171.9 m	343.7 m	689.5 m	1.4	2.7
	Full Winding	Turns	22	35	54	83	128	199	307	476	736	1,139	1,764
		Rdc(Ω)	3.3 m	8.4 m	20.7 m	50.7 m	124.3 m	307.3 m	753.9 m	1.9	4.6	11.3	27.7

