



Product information

Three-phase four-wire AC filter-DAC44

Description

Simple installation, bolt connection, customizable, single-pole filter circuit design, strong anti-interference, good low frequency performance, can be used for high current equipment.

Technical Data

Rated Voltage	380/440VAC
Line Frequency	50/60Hz
Test Voltage	1500VDC(line/line) 2750VAC(line/ground)
Insulation Resistance	>50M Ω @500VDC
Temperature Rise	<30°C
Climatic Category	25/085/21
Housing Material	Nickel-plated iron

Approval & Compliance



Features

Rated current :100A-200A

Easy to install

Single-pole filter circuit design, strong anti-interference

Can be customized upon request

Applications

Switching power supply


General electronic equipment

Power equipment such as UPS


Power monitoring equipment

Measuring equipment


Performance Indicator



Rated Current [A]

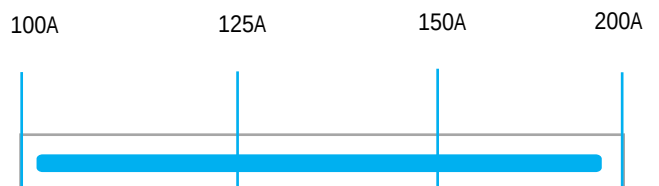


Typical Circuit Diagram

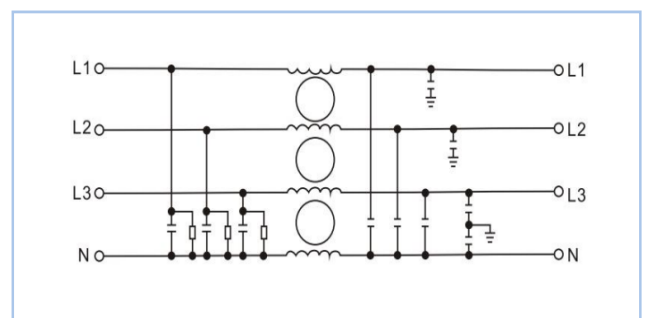


Part No	Rated Current	Rated Current	Case Type	Termination		Safety Certification	Remark
				Input	Output		
DAC44-100A	100A	<6.0mA	C44	Bolt	Bolt	CE、ROHS	Parameter customization
DAC44-125A	125A	<6.0mA	C44	Bolt	Bolt		
DAC44-150A	150A	<10.0mA	C44	Bolt	Bolt		
DAC44-200A	200A	<12.0mA	C44	Bolt	Bolt		


Overall Dimension (±1mm)

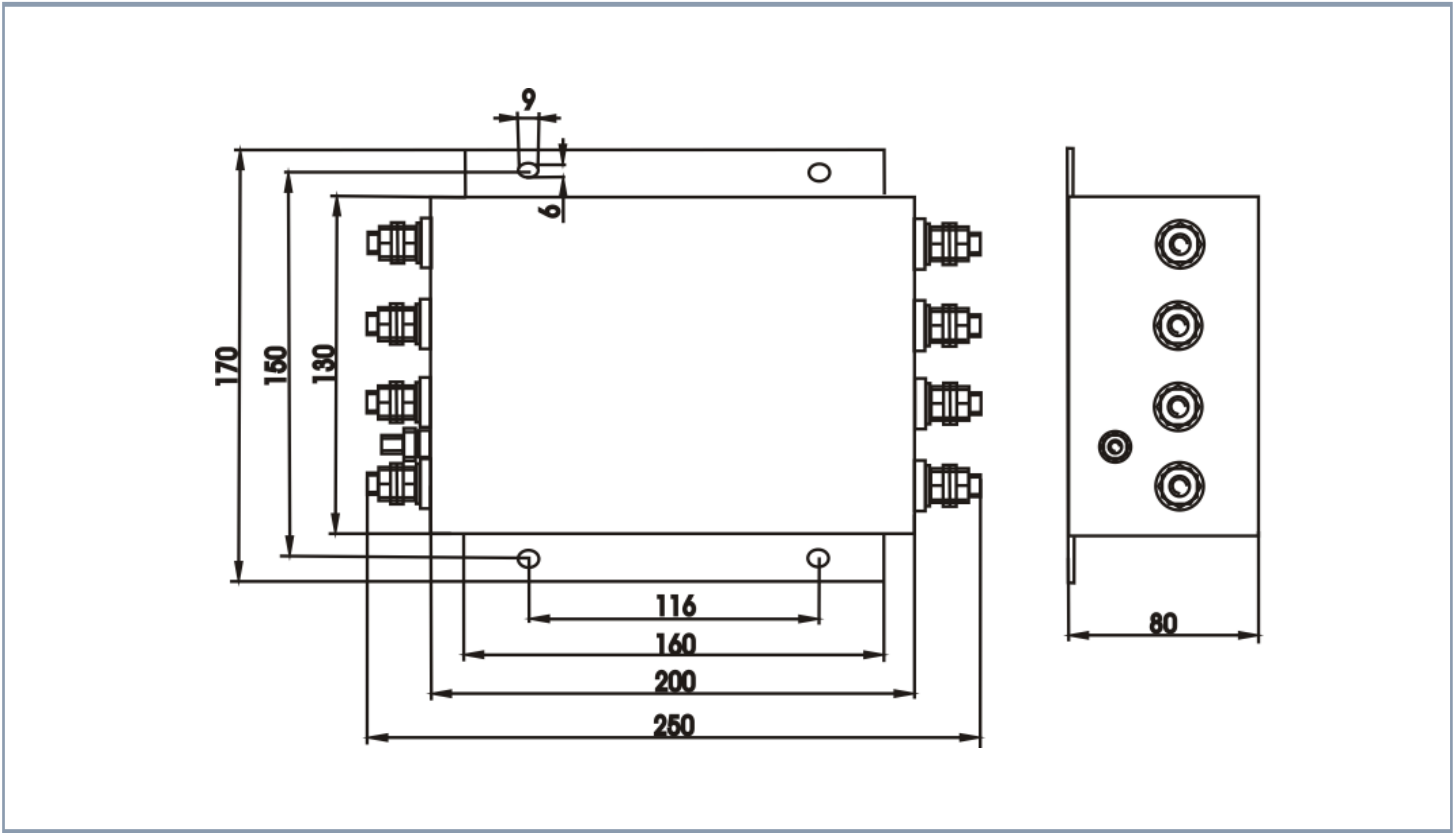


Insertion loss -(common mode)

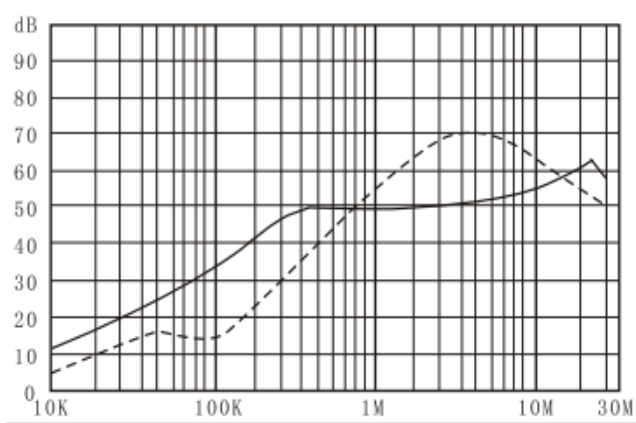


DAC44-100A

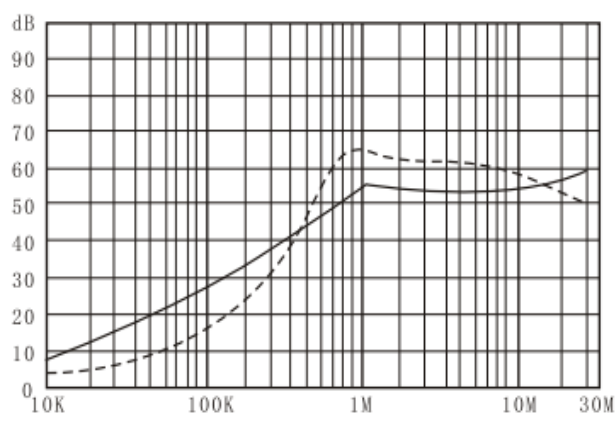

DAC44-125A

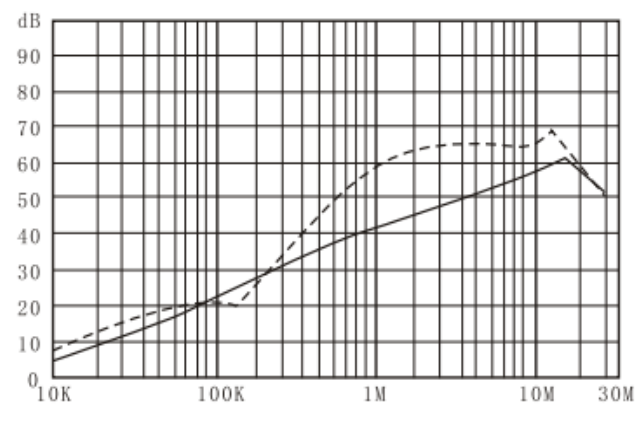

DAC44-150A

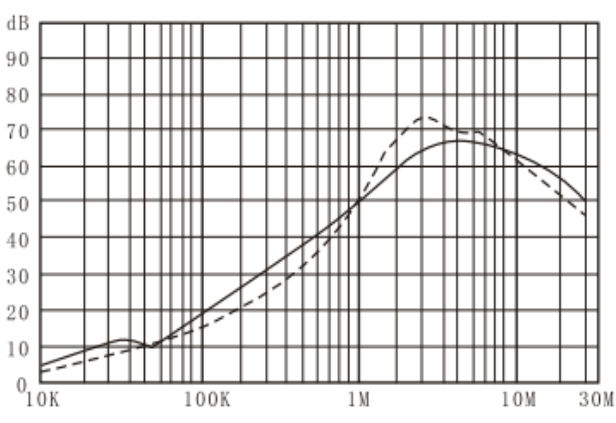

DAC44-200A