




Part Number:

MS-080160-2H127

Revision 2022-Apr-28

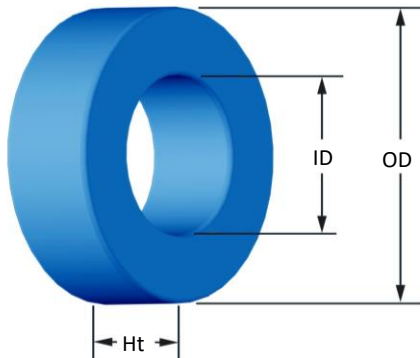

(If coated, Max./Min. includes coating)

OD	(nom. - bare core) (max.)	20.32 mm 21.08 mm	0.800 in 0.830 in
ID	(nom. - bare core) (min.)	12.70 mm 12.07 mm	0.500 in 0.475 in
HT	(nom. - bare core) (max.)	12.70 mm 13.46 mm	0.500 in 0.530 in
Mass	(approximate)	14 grams	
Magnetic Dimensions	A _e - Eff. Mag. Cross Section	0.452 cm ²	
	L _e - Eff. Mag. Path Length	5.09 cm	
	V _e - Eff. Core Volume	2.30 cm ³	
	WA - Min. Eff. Window Area	1.14 cm ²	
	sa - Surface Area	20.3 cm ²	
Inductance	mlt - mean length per turn	4.20 cm	
	μ _i (reference)	160	
	A _L value (nominal)	174 nH/N ²	
	Test Winding	N=90, #28 AWG	
	Frequency	10 kHz	
Core Loss	Voltage on Agilent 4284A	0.18 V	
	AL tolerance	±8%	
	Core Loss(mW/cm ³):	$\frac{a}{Bpk^3} + \frac{b}{Bpk^{2.3}} + \frac{c}{Bpk^{1.65}} + d \cdot Bpk^2 \cdot f^2$	
	where B _{pk} expressed in gauss, f expressed in hertz, and:	a=1.394E+10, b=1.034E+09, c=1.244E+07, d=4.007E-14	
	B _{pk}	1000 G	
DC Saturation	frequency	50 kHz	
	Core Loss (nominal)	276 mW/cm ³	
	Core Loss (maximum)	318 mW/cm ³	
	%μ _i	$\frac{1}{a + b \cdot H^c} + d$	
	where H expressed in oersteds, and:	a=1.000E-02, b=4.439E-05, c=1.627, d=0.000	
Coating/Pkg	H _{DC}	40 Oe	
	Percent Initial Perm(nom.)	35.8%	
	Percent Initial Perm(min.)	29.3%	
	Coating Type:	Blue Epoxy	
	Voltage Breakdown (min.)	1000 Vrms	
Winding Table	Limit	0.1 mA, 5 s	
	Package Quantity	900 Pcs/Box	
	Wire Size	AWG	10 12 14 16 18 20 22 24 26 28 30
	Single Layer	Turns	2.500 2.000 1.600 1.250 1.000 0.800 0.630 0.500 0.400 0.315 0.250
	Full Winding	Rdc(Ω)	1.4 m 2.8 m 5.9 m 12.1 m 24.6 m 48.9 m 97.7 m 197.8 m 393.2 m 786.0 m 1.6
		Turns	9 14 22 34 53 82 127 197 305 472 731
		Rdc(Ω)	1.2 m 3.1 m 7.6 m 18.8 m 46.5 m 114.5 m 282.0 m 695.7 m 1.7 4.2 10.4

