



1. PHYSICAL CHARACTERISTICS (mm)

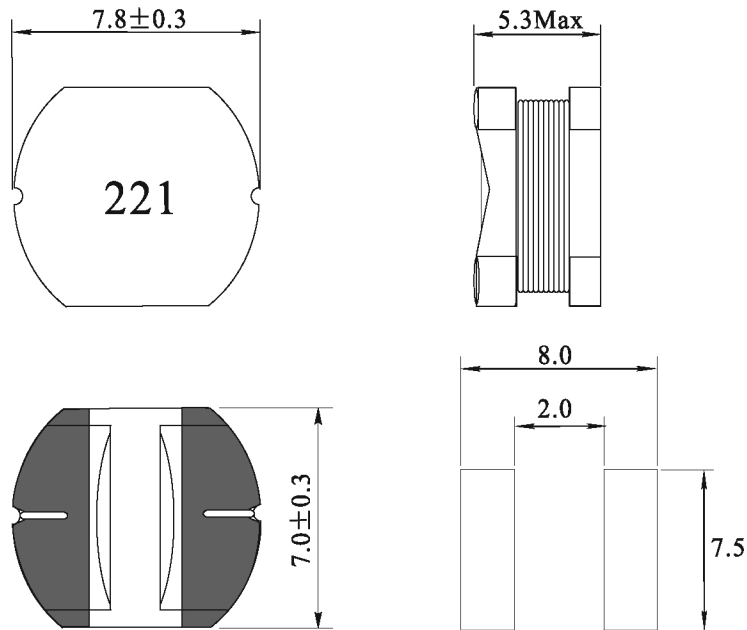

2. ELECTRICAL SCHEMATIC



3. ELECTRICAL SPECIFICATIONS

L: $220 \mu\text{H} \pm 10\%$ @ 1.0KHz, 0.1V

Q: 12 Ref@0.796MHz

DCR: 0.96Ω Max

Isat: 0.8A Max (Inductance drop 10% Max)

Irms: 0.49A Max (Temp. rise 40°C Max)

SRF: 5.0MHz Min

Operating temperature: -40°C to $+125^\circ\text{C}$
(Including temp. rise 40°C)

Storage temperature: -40°C to $+125^\circ\text{C}$

Test Instrument:

L: HP4284A

RDC: HM2540

Note:

1. Solderability: leads shall meet MIL-STD-202, Method 208D for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: $>28\%$