




Part Number:

**MS-268014-2**

Revision:

2023-Dec-18

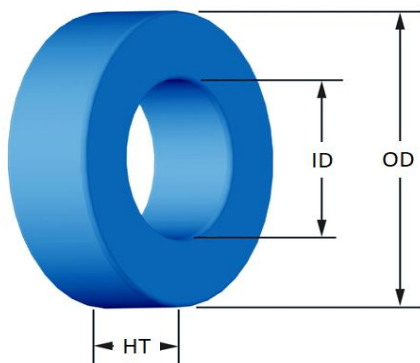

(If coated, Max./Min. includes coating)

| (If coated, Max./Min. includes coating) |                                                                                                                                                                         | mm          | in                 |        |        |  |
|-----------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|--------------------|--------|--------|--|
| OD                                      | (nom. - bare core)                                                                                                                                                      | 68.00       | 2.677              |        |        |  |
|                                         | (max.)                                                                                                                                                                  | 69.42       | 2.733              |        |        |  |
| ID                                      | (nom. - bare core)                                                                                                                                                      | 36.00       | 1.417              |        |        |  |
|                                         | (min.)                                                                                                                                                                  | 34.67       | 1.365              |        |        |  |
| HT                                      | (nom. - bare core)                                                                                                                                                      | 20.00       | 0.787              |        |        |  |
|                                         | (max.)                                                                                                                                                                  | 21.41       | 0.843              |        |        |  |
| Mass                                    | (approximate)                                                                                                                                                           | 240         | grams              |        |        |  |
| Magnetic Dimensions                     | A <sub>e</sub> - Eff. Mag. Cross Section                                                                                                                                | 3.14        | cm <sup>2</sup>    |        |        |  |
|                                         | L <sub>e</sub> - Eff. Mag. Path Length                                                                                                                                  | 15.8        | cm                 |        |        |  |
|                                         | V <sub>e</sub> - Eff. Core Volume                                                                                                                                       | 49.7        | cm <sup>3</sup>    |        |        |  |
|                                         | W <sub>A</sub> - Min. Eff. Window Area                                                                                                                                  | 9.44        | cm <sup>2</sup>    |        |        |  |
|                                         | s <sub>a</sub> - Surface Area                                                                                                                                           | 159         | cm <sup>2</sup>    |        |        |  |
|                                         | mlt - mean length per turn                                                                                                                                              | 9.49        | cm                 |        |        |  |
| Inductance                              | μ <sub>i</sub> (reference)                                                                                                                                              | 14          |                    |        |        |  |
|                                         | A <sub>L</sub> value (nominal)                                                                                                                                          | 35          | nH/N <sup>2</sup>  |        |        |  |
|                                         | Test Winding                                                                                                                                                            | 100 Turns   | AWG# 18            |        |        |  |
|                                         | Frequency                                                                                                                                                               | 10k         | Hz                 |        |        |  |
|                                         | Voltage on Agilent 4284A                                                                                                                                                | 1.4         | V                  |        |        |  |
|                                         | AL tolerance                                                                                                                                                            | ±8%         |                    |        |        |  |
| Core Loss                               | $\text{Core Loss(mW/cm}^3\text{)}=\frac{a}{B_{pk}^3}+\frac{b}{B_{pk}^{2.3}}+\frac{c}{B_{pk}^{1.65}}+d \cdot B_{pk}^2 \cdot f^2$                                         |             |                    |        |        |  |
|                                         | where <i>B<sub>pk</sub></i> expressed in gauss, <i>f</i> expressed in hertz, and:<br><i>a</i> =1.000E+06, <i>b</i> =1.814E+08, <i>c</i> =3.377E+06, <i>d</i> =2.628E-14 |             |                    |        |        |  |
|                                         | B <sub>pk</sub>                                                                                                                                                         | 300         | G                  |        |        |  |
|                                         | frequency                                                                                                                                                               | 100 k       | Hz                 |        |        |  |
|                                         | Core Loss (nominal)                                                                                                                                                     | 180         | mW/cm <sup>3</sup> |        |        |  |
|                                         | Core Loss (maximum)                                                                                                                                                     | 207         | mW/cm <sup>3</sup> |        |        |  |
| DC Saturation                           | $\% \mu_i \frac{1}{a+b \cdot H^c}+d$                                                                                                                                    |             |                    |        |        |  |
|                                         | where H expressed in oersteds, and:<br><i>a</i> =1.000E-02, <i>b</i> =9.443E-07, <i>c</i> =1.533, <i>d</i> =0.000                                                       |             |                    |        |        |  |
|                                         | H <sub>DC</sub>                                                                                                                                                         | 200         | Oe                 |        |        |  |
|                                         | Percent Initial Perm.(nom.)                                                                                                                                             | 75.9        | %                  |        |        |  |
|                                         | Percent Initial Perm.(min.)                                                                                                                                             | 70.4        | %                  |        |        |  |
| Coating/Pkg                             | Coating Type:                                                                                                                                                           | Blue Epoxy  |                    |        |        |  |
|                                         | Voltage Breakdown (min.)                                                                                                                                                | 1000 Vrms   |                    |        |        |  |
|                                         | Limit                                                                                                                                                                   | 0.1 mA, 5 s |                    |        |        |  |
|                                         | Package Quantity                                                                                                                                                        | 24 Pcs/Box  |                    |        |        |  |
| Winding Table                           | Wire Size                                                                                                                                                               | AWG         | 8                  | 10     | 12     |  |
|                                         |                                                                                                                                                                         | mm          | 3.150              | 2.500  | 2.000  |  |
|                                         | Single Layer                                                                                                                                                            | Turns       | 27                 | 34     | 43     |  |
|                                         |                                                                                                                                                                         | Rdc(Ω)      | 5.3 m              | 10.6 m | 21.2 m |  |
|                                         | Full Winding                                                                                                                                                            | Turns       | 49                 | 76     | 118    |  |
|                                         |                                                                                                                                                                         | Rdc(Ω)      | 9.6 m              | 23.6 m | 58.2 m |  |

