

Product Specifications



Core type:


EQ30 + PLT30/20/3

Selling unit:

PCS


Product dimensions (mm): EQ30

	Nom	Tol +	Tol -	Max	Min
A	30.00	0.40	0.40	30.40	29.60
B	20.00	0.30	0.30	20.30	19.70
C	19.45	0.40	0.40	19.85	19.05
D2	26.00	0.40	0.40	26.40	25.60
D3	11.00	0.20	0.20	11.20	10.80
E	8.00	0.15	0.15	8.15	7.85
F	5.30	0.20	0.20	5.50	5.10

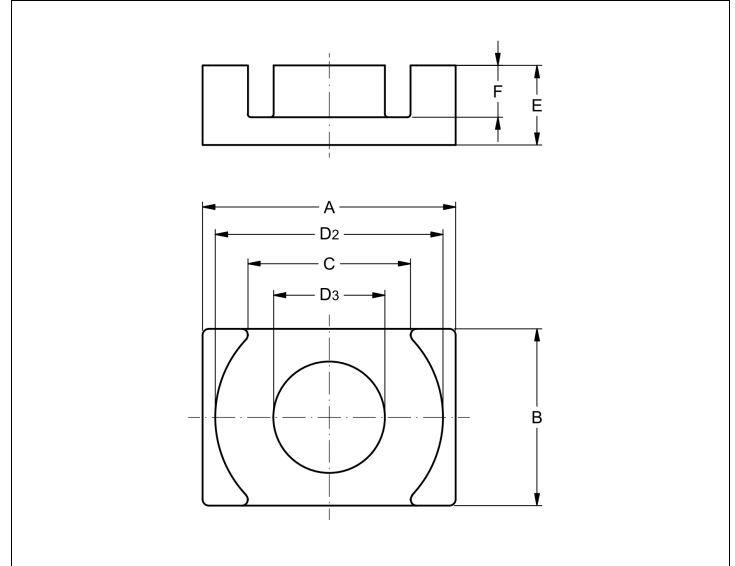

Product dimensions (mm): PLT30/20/3

	Nom	Tol +	Tol -	Max	Min
A	30.00	0.40	0.40	30.40	29.60
B	20.00	0.30	0.30	20.30	19.70
C	2.70	0.10	0.10	2.80	2.60

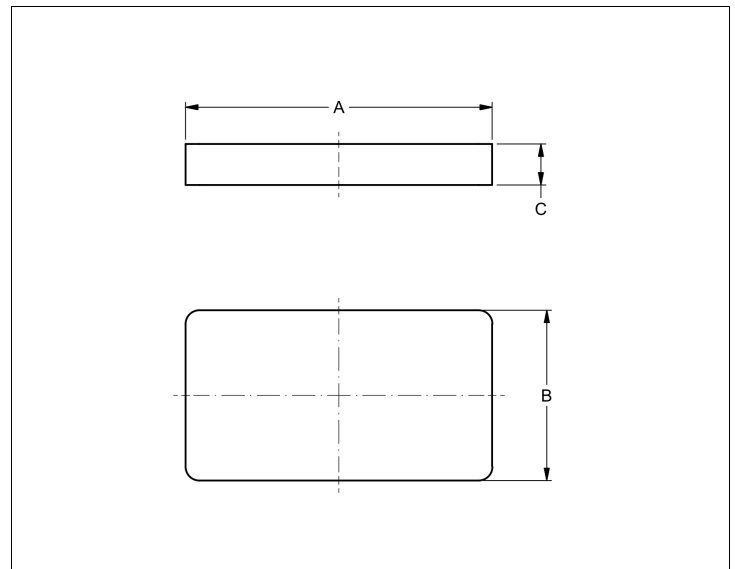

Effective parameters

Effective area	Minimum area	Effective length	Effective volume	Core factor
$A_e = 108 \text{ [mm}^2\text{]}$	$A_{min} = 95 \text{ [mm}^2\text{]}$	$L_e = 36.2 \text{ [mm]}$	$V_e = 3910 \text{ [mm}^3\text{]}$	$C_1 = 0.335 \text{ [mm}^{-1}\text{]}$

Inductance factor

Material	Value	Tol +	Tol -	Measuring conditions			Unit
3C95	7960	25%	25%	10 kHz	< 0.1 mT	25°C	nH/turns ²
3C96	6000	25%	25%	10 kHz	< 0.1 mT	25°C	nH/turns ²
3F36	4000	25%	25%	10 kHz	< 0.1 mT	25°C	nH/turns ²
3F4	3200	25%	25%	10 kHz	< 0.1 mT	25°C	nH/turns ²
3F46	2500	25%	25%	10 kHz	< 0.1 mT	25°C	nH/turns ²

Product Specifications



Core type:

EQ30 + PLT30/20/3

Selling unit:

PCS

Power loss

Material	Symbol	Value	Measuring conditions			Unit
3C95	Pv	< 1.9	100 kHz	200 mT	100°C	W/set
3C95	Pv	< 2	100 kHz	200 mT	25°C	W/set
3C96	Pv	< 1.8	100 kHz	200 mT	100°C	W/set
3C96	Pv	< 0.7	400 kHz	50 mT	100°C	W/set
3F36	Pv	< 0.59	500 kHz	50 mT	100°C	W/set
3F36	Pv	< 4.5	500 kHz	100 mT	100°C	W/set
3F4	Pv	< 1.2	1000 kHz	30 mT	100°C	W/set
3F4	Pv	< 2	3000 kHz	10 mT	100°C	W/set
3F46	Pv	< 2.1	1000 kHz	50 mT	100°C	W/set
3F46	Pv	< 1.3	3000 kHz	10 mT	100°C	W/set

Bsat

Material	Symbol	Value	Measuring conditions			Unit
3C95	Bsat	> 330	10 kHz	250 A/m	100°C	mT
3C96	Bsat	> 340	10 kHz	250 A/m	100°C	mT
3F36	Bsat	> 320	10 kHz	250 A/m	100°C	mT
3F4	Bsat	> 330	10 kHz	250 A/m	100°C	mT
3F46	Bsat	> 330	10 kHz	250 A/m	100°C	mT

Accessories

Ordering name	Description	Ordering code
CSV-EQ30/16/20-1S-10P-Z	Coil former, termoset, vertical	432202107031