




Part Number:

MS-031090-8

Revision 2021-Dec-01 - Generated 2021-Dec-01

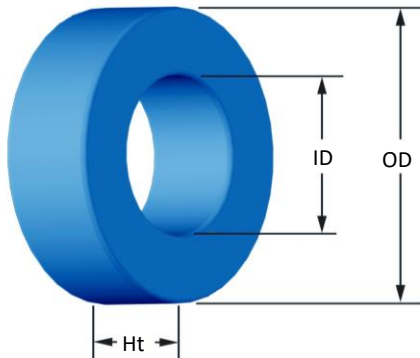

(If coated, Max./Min. includes coating)

OD	(nom. - bare core) (max.)	7.87 mm 8.51 mm	0.310 in 0.335 in
ID	(nom. - bare core) (min.)	3.96 mm 3.43 mm	0.156 in 0.135 in
HT	(nom. - bare core) (max.)	3.18 mm 3.81 mm	0.125 in 0.150 in
Mass	(approximate)	0.65 grams	
Magnetic Dimensions	A _e - Eff. Mag. Cross Section	0.0615 cm ²	
	L _e - Eff. Mag. Path Length	1.79 cm	
	V _e - Eff. Core Volume	0.110 cm ³	
	WA - Min. Eff. Window Area	0.0924 cm ²	
	sa - Surface Area	2.65 cm ²	
Inductance	mlt - mean length per turn	1.44 cm	
	μ _i (reference)	90	
	A _L value (nominal)	37 nH/N ²	
	Test Winding	N=45, #32 AWG	
	Frequency	10 kHz	
Core Loss	Voltage on Agilent 4284A	0.012 V	
	AL tolerance	±12%	
	$\text{Core Loss (mW/cm}^3\text{)} = \frac{a}{B_{pk}^3} + \frac{b}{B_{pk}^{2.3}} + \frac{c}{B_{pk}^{1.65}} + d \cdot B_{pk}^2 \cdot f^2$		
	where B _{pk} expressed in gauss, f expressed in hertz, and: a=7.890E+09, b=7.111E+08, c=8.980E+06, d=2.846E-14		
	B _{pk}	1000 G	
DC Saturation	frequency	50 kHz	
	Core Loss (nominal)	323 mW/cm ³	
	Core Loss (maximum)	372 mW/cm ³	
	$\% \mu_i = \frac{1}{a + b \cdot H^c} + d$		
	where H expressed in oersteds, and: a=1.000E-02, b=3.994E-06, c=1.883, d=0.000		
Coating/Pkg	H _{DC}	50 Oe	
	Percent Initial Perm(nom.)	61.3%	
	Percent Initial Perm(min.)	52.9%	
	Coating Type:	Parylene N	
	Voltage Breakdown (min.)	500 Vrms	
Winding Table	Limit	0.1 mA, 5 s	
	Package Quantity	14,400 Pcs/Box	
	Wire Size	AWG	22
		mm	0.630
			0.500

		22	24	26	28	30	32	34	36	38	40	42
		0.630	0.500	0.400	0.315	0.250	0.200	0.160	0.125	0.100	0.080	0.063
Single Layer	Turns	11	14	18	23	29	37	47	59	74	93	116
	Rdc(Ω)	8.4 m	17.0 m	34.7 m	70.6 m	141.5 m	287.1 m	580.1 m	1.2	2.3	4.6	9.2
Full Winding	Turns	10	16	25	38	59	91	141	219	339	524	812
	Rdc(Ω)	7.6 m	19.4 m	48.2 m	116.6 m	287.9 m	706.2 m	1.7	4.3	10.6	26.0	64.1

