




Part Number:

MS-199040-2

Revision:

2024-Jul-22

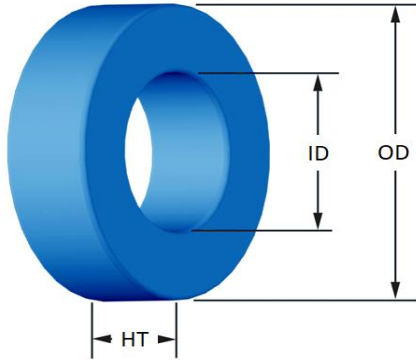

(If coated, Max./Min. includes coating)

		mm	in
OD	(nom. - bare core)	50.80	2.000
	(max.)	51.69	2.035
ID	(nom. - bare core)	24.77	0.975
	(min.)	23.95	0.943
HT	(nom. - bare core)	20.83	0.820
	(max.)	21.72	0.855
Mass	(approximate)	160	grams
Magnetic Dimensions	A _e - Eff. Mag. Cross Section	2.65	cm ²
	L _e - Eff. Mag. Path Length	11.385	cm
	V _e - Eff. Core Volume	30.2	cm ³
	WA - Min. Eff. Window Area	4.51	cm ²
	sa - Surface Area	97.4	cm ²
Inductance	mlt - mean length per turn	8.32	cm
	μ _i (reference)	40	
	A _i value (nominal)	117	nH/N ²
	Test Winding	70 Turns	AWG# 20
	Frequency	10k	Hz
	Voltage on Agilent 4284A	0.82	V
	AL tolerance	±8%	
Core Loss	Core Loss(mW/cm ³)= $\frac{a}{B_{pk}^3} + \frac{b}{B_{pk}^{2.3}} + \frac{c}{B_{pk}^{1.65}} + d \cdot B_{pk}^2 \cdot f^2$		
	where B _{pk} expressed in gauss, f expressed in hertz, and:		
	a=1.000E+06, b=6.961E+08, c=5.397E+06, d=4.127E-14		
	B _{pk}	1000	G
	frequency	50 k	Hz
DC Saturation	Core Loss (nominal)	441	mW/cm ³
	Core Loss (maximum)	507	mW/cm ³
	$\% \mu_i = \frac{1}{a + b \cdot H^c} + d$		
	where H expressed in oersteds, and:		
Coating/Pkg	a=1.000E-02, b=2.655E-06, c=1.703, d=0.000		
	H _{DC}	100	Oe
	Percent Initial Perm(nom.)	59.6	%
	Percent Initial Perm(min.)	52.0	%
Coating/Pkg	Coating Type:	Blue Epoxy	
	Voltage Breakdown (min.)	1000 Vrms	
	Limit	0.1 mA, 5 s	
	Package Quantity	48 Pcs/Box	

Winding Table	Wire Size	AWG	8	10	12	14	16	18	20	22	24	26	28
		mm	3.150	2.500	2.000	1.600	1.250	1.000	0.800	0.630	0.500	0.400	0.315
	Single Layer	Turns	17	22	29	36	46	58	72	91	114	142	177
	Full Winding	Rdc(Ω)	2.9 m	6.0 m	12.5 m	24.8 m	50.3 m	100.9 m	199.2 m	400.4 m	797.7 m	1.6	3.1
		Rdc(Ω)	4.1 m	9.8 m	24.2 m	59.8 m	147.7 m	363.6 m	896.4 m	2.2	5.4	13.4	32.9

