

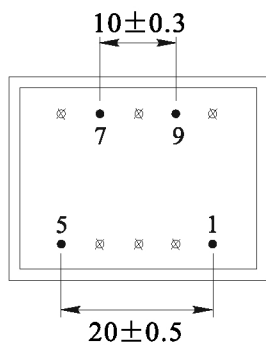


## 1. PHYSICAL CHARACTERISTICS (mm)

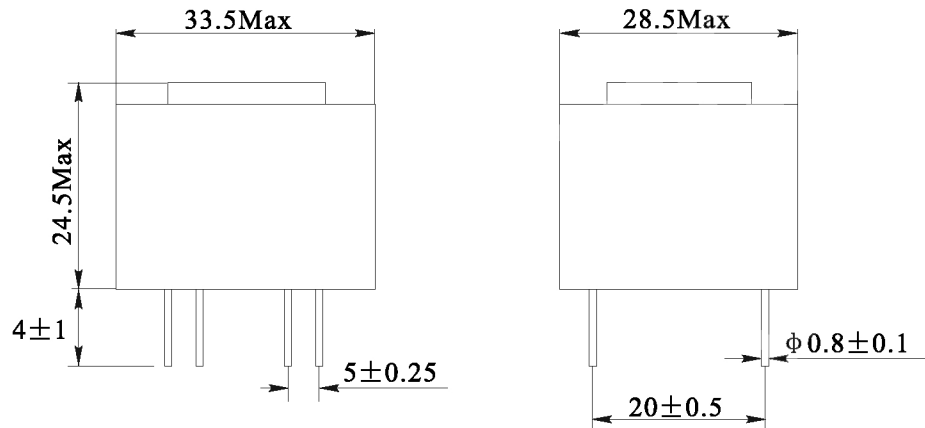


Bottom view



### NOTES:

Temp 20°C 48%RH  
 RoHS Compliant

## 2. ELECTRONICAL SCHEMATIC

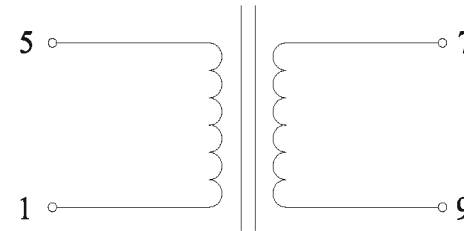

## 3. ELECTRONICAL SPECIFICATIONS

Pri voltage: 230V, 50Hz

Sec load voltage: 15.0V ± 5% @ 100mA

No load voltage: 24.2V Ref

Output Power: 1.5VA

Hi-Pot: 4000V, 50Hz, 1mA, 10S Pri to Sec

### Note:

1. Solderability: leads shall meet MIL-STD-202,

Method 208D for solderability.

2. Flammability: UL94V-0

3. ASTM oxygen index: >28%