

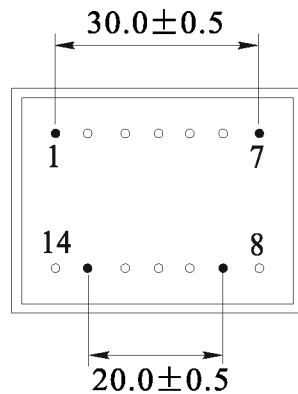


## 1. PHYSICAL CHARACTERISTICS (mm)

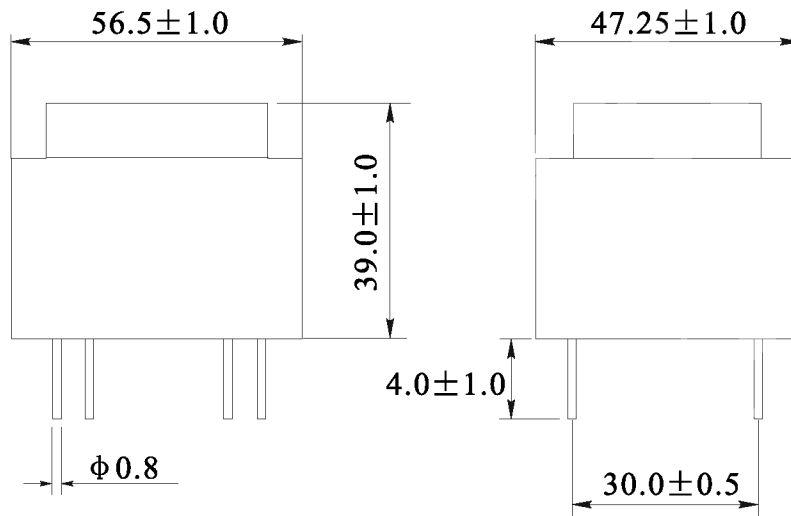

Bottom view


Top marking



### NOTES:

Temp 20°C 48%RH  
RoHS Compliant

## 2. ELECTRONICAL SCHEMATIC

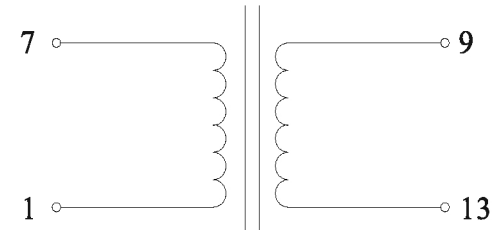

## 3. ELECTRONICAL SPECIFICATIONS

Pri voltage: 230V, 50Hz-60Hz

Sec load voltage:  $15.0V \pm 5\%V @ 1067mA$

Noload votlage:  $18.4Vac \pm 5\%V @ 35mA$

Output Power: 16VA

Hi-Pot: 3500V, 50Hz, 1mA, 10S Pri to Sec

Note:

1. Solderability: leads shall meet MIL-STD-202,

Method 208D for solderability.

2. Flammability: UL94V-0

3. ASTM oxygen index: >28%