



1. PHYSICAL CHARACTERISTICS(mm)

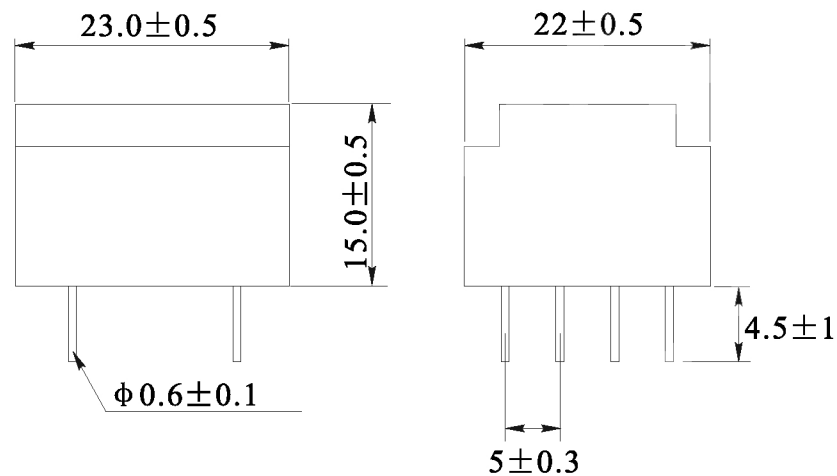


Bottom view

Top marking

1 ■	7 ■
AC230V 50/60Hz	
PE200603	
ta: 70°C 0.35VA	
4 ■	6 ■
12V,29mA	

2. ELECTRONICAL SCHEMATIC

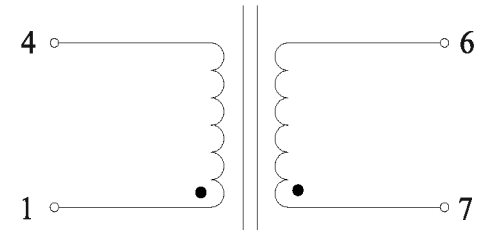

3. ELECTRONICAL SPECIFICATIONS

Pri voltage: 230V,50Hz-60Hz

Sec load voltage: $12.0V \pm 0.5V @ 29mA$

Noload votlage: $21.9V \pm 0.5V$

Output Power: 0.35VA

Hi-Pot: 3500V,50Hz,1mA,10S Pri to Sec

Note:

1.Solderability:leads shall meet MIL-STD-202,

Method 208D for solderability.

2.Flammability: UL94V-0

3.ASTM oxygen index: >28%

NOTES:

Temp 20°C 48%RH

RoHS Compliant