


CORE SETS

Effective core parameters

SYMBOL	PARAMETER	VALUE	UNIT
Ve	effective volume	28620	mm ³
le	effective length	125	mm
Ae	effective area	229	mm ²

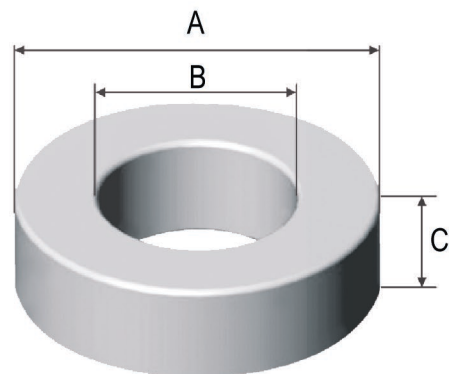

Coat	A	B	C
Uncoat	57.2 ^{+0.9} _{-0.2}	26.4 ^{+0.2} _{-0.9}	15.2 ^{+0.9} _{-0.3}
Coated	58.0 max	25.6 max	16.0 max

Note: With grey epoxy coating

Part No.							Perm.	AL
Sendust	High Flux	MPP	Ma-Flux	Multi-Alloy			μ	nH/N ²
				DSH	DNH	DSG		
DS571026	DH571026	DM571026	DFG571026	-	-	DSG571026	26	65
DS571060	DH571060	DM571060	DFG571060	DSH571060	DNH571060	DSG571060	60	138
DS571075	-	-	DFG571075	DSH571075	DNH571075	DSG571075	75	172
DS571090	-	-	DFG571090	DSH571090	DNH571090	DSG571090	90	207
DS571125	DH571125	DM571125	-	DSH571125	DNH571125	-	125	287