
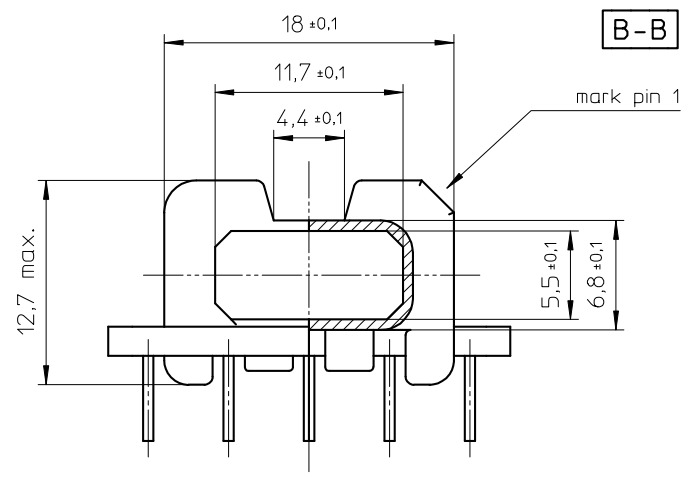


HOLE PATTERN:

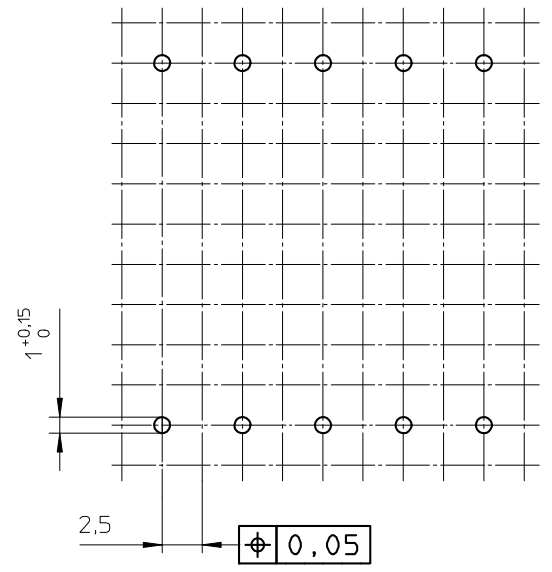

Coil former material: Sumikon PM-9630 (PF), glass-reinforced.
 UL file number: E41429 - UL94V-0.

Pin material: Copper-clad steel, Sn plated.


Max. operating temp.: acc. to IEC 60085 class H, 180°C.

Resistance to soldering heat: acc. to IEC 60068-2-20 Part 2, Test Tb, method 1B, 350°C-3,5sec.

Solderability: acc. to IEC 60068-2-20 Part 2, Test Ta, method 1, 235°C - 2sec.

Min. winding area: 40,2 mm².

Mean length of turn: 46,4 mm.



CLASSNO.		CSH-EFD25-1S-10P-TZ		4322 021 06301		03-03-10	09-09-14
NAME NAAM	M.Trynqiel	SUPERS. VERV.		001	SPSH BL	112-001	069
MPA	CHECK CONTR.	DAT.	03-03-10	Property of Eigenaam van	© FERROXCUBE 2000		
							A3