


PHASED OUT

HOLE PATTERN:

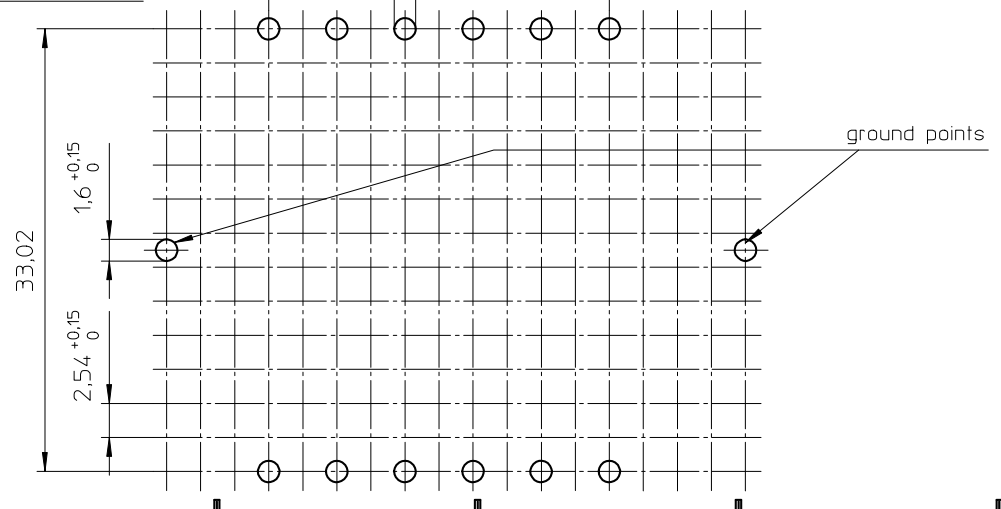

Coil former material: Valox 420SE0 (PBT), glass-reinforced.
 UL file number: E45329(R) - UL94V-0.
 Pin material: CuSn - Ni flash, Sn plated.
 Max. operating temp.: acc. to IEC 60 085 class F, 155°C.
 Resistance to soldering heat: acc. to IEC 60 068-2-20 Part 2, Test Tb, method 1B, 350°C - 3.5sec.
 Solderability: acc. to IEC 60 068-2-20 Part 2, Test Ta, method 1, 235°C - 2sec.
 Min. winding area: 75 mm².
 Mean length of turn: 61 mm.

CLASSNO.	CPV-RM12/I-1S-12PD		4322 021 34112	99-04-26
2000-03-07				2000-03-07
NAME NAAM	M.Trynagiel	SUPERS. VERV.	001 BL 112 - 001	2003-07-24
MPA	CHECK CONTR.	DAT.	Property of Eigendom van	2005-09-01
		90-10-08	© FERROXCUBE 2008	2008-02-28
				A3