

SPECIFICATIONS

Rated(额定参数): 300V,15A
Dielectric strength(抗电强度): AC1600V/1 Minute
Insulation Resistance(绝缘电阻):1000MΩ Min
Contact Resistance(接触电阻):20mΩ Max
Wire Range(线径):22~14AWG
Wire Range [mm²]:0.2~2.5mm²
Strip length(剥线长度):8~9mm
Temp. range(操作温度): -40℃~+105℃
MAX Soldering(瞬时温度):+250℃,5s







Housing Material(塑件): PA66 (UL94 V-0)
Contact(端子): Copper alloy, Sn plated铜合金, 镀锡

PITCH RANGE		NOMINAL DIMENSION RANGE					
IN MM		IN MM					
OVER	OVER	OVER	OVER	OVER	OVER	OVER	OVER
TO	TO	TO	TO	TO	TO	TO	TO
6	10	30	60	100	150	150	150
±0.15	±0.25	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30

Ordering Information

JL 8EDGK - XXX XX X X 1

Pitch
500=5.00PH
508=5.08PH
No.of pins
2P~24P
Housing Color
B=Black
G=Green
U=Blue
R=Red
W=White
Y=Yellow
O=Orange
E=Grey
Packing
0=Pe bog
A=Troy
T=Tube

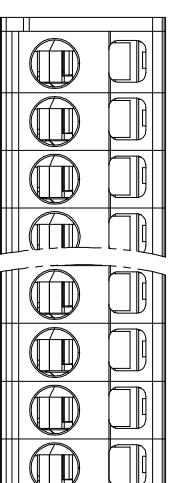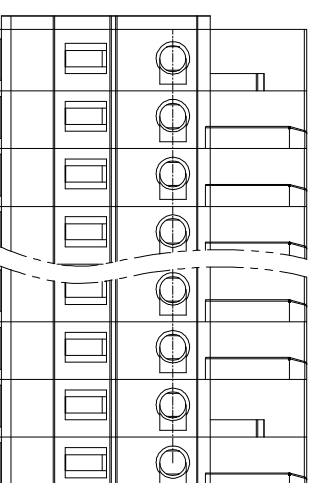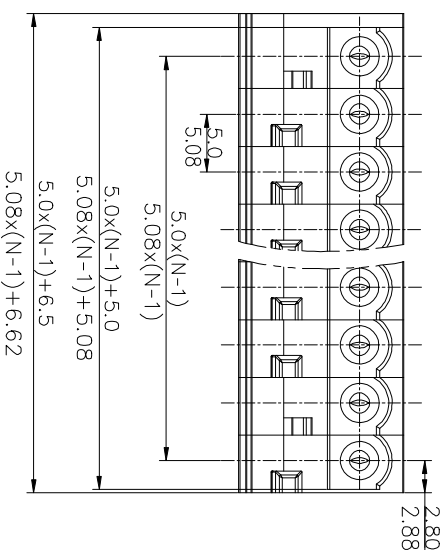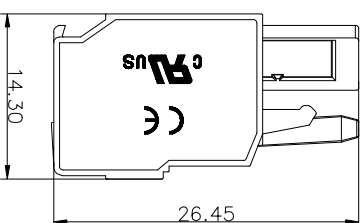

		OPERATION		DRAW		SCALE		FIT		PART NO.	
		X.X	±0.30			UNIT	mm			JILN 东莞市锦凌电子有限公司 DONGGUAN JINLING ELECTRONIC CO., LTD	
		X.XX	±0.20	CHECK		SIZE	A4			JL8EDGK-500(508)XXXX1	
		X.XXX	±0.10			SHEET	1/1			JL8EDGK-5.0/5.08 第X页共X页	
REV	DATE	MODIFICATION DESCRIPTION			CHANGE	DIM	TOL	APPROVE		TITLE:	
1											