




1. PHYSICAL CHARACTERISTICS (mm)

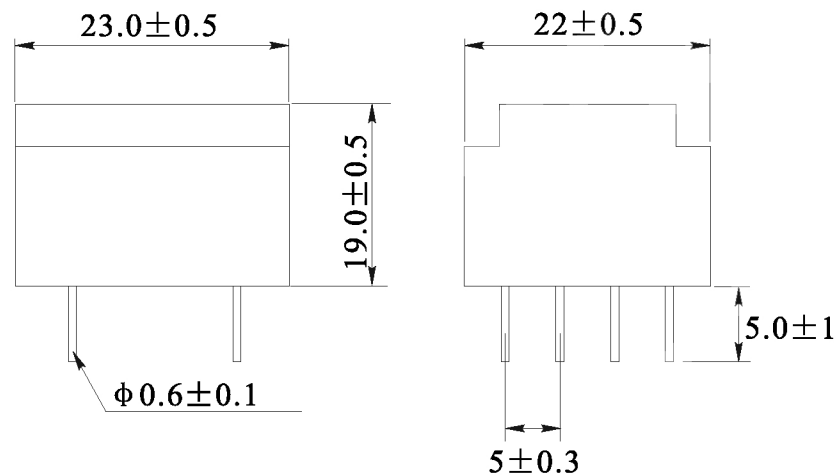


Bottom view

Top marking



2. ELECTRONICAL SCHEMATIC

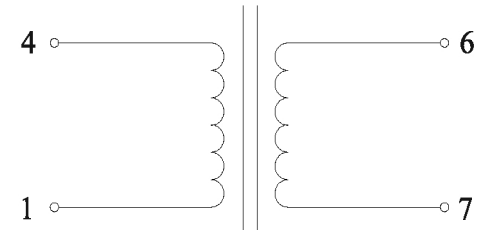

3. ELECTRONICAL SPECIFICATIONS

Pri voltage: 230V, 50Hz-60Hz

Sec load voltage: $6.0V \pm 0.5V @ 83mA$

Noload voltage: $9.0V \pm 0.5V$

Output Power: 0.5VA

Hi-Pot: 3500V, 50Hz, 1mA, 10S Pri to Sec

Note:

1. Solderability: leads shall meet MIL-STD-202,

Method 208D for solderability.

2. Flammability: UL94V-0

3. ASTM oxygen index: >28%

NOTES:

Temp 20°C 48%RH

RoHS Compliant