


HOLE PATTERN:

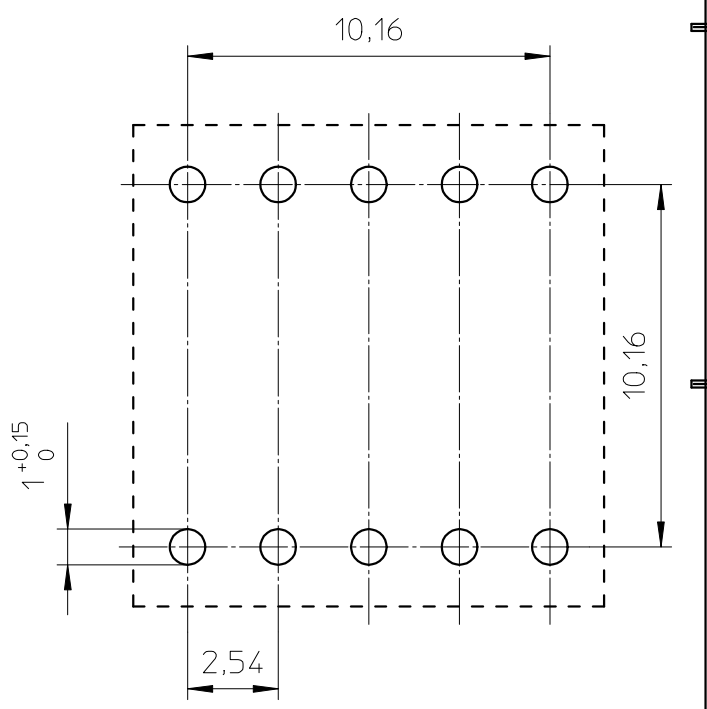

Coil former material: Sumikon PM9820 (PF), glass-reinforced.
 UL file number: E41429 - UL94V-0.
 Pin material: Copper-clad steel, Sn plated.
 Max. operating temp.: acc. to IEC 60 085 class H, 180°C.
 Resistance to soldering heat: acc. to IEC 60 068-2-20 Test Ta, method 1B, 350°C-3,5s
 Solderability: acc. to IEC 60 068-2-20 Part 2, Test Ta, method 1, 235°C-2s
 Min. winding area: 13,5 mm².
 Mean length of turn: 23 mm.

CLASS.NO.					95-12-07	
					96-11-25	
					99-10-06	
					04-06-29	
					2004-09-28	
NAME NAAM	M.Veekens	SUPERS. VERV.	1	SH BL.	112 - 001 010	A4
MPA	CHECK CONTR.	DAT.	88-04-22	Property of Eigendom van	© FERROXCUBE 2000	

CSH-EP13-1S-10P

4322 021 35031

96-11-25

95-12-07
96-11-25
99-10-06
04-06-29
2004-09-28