FERROXCUBE

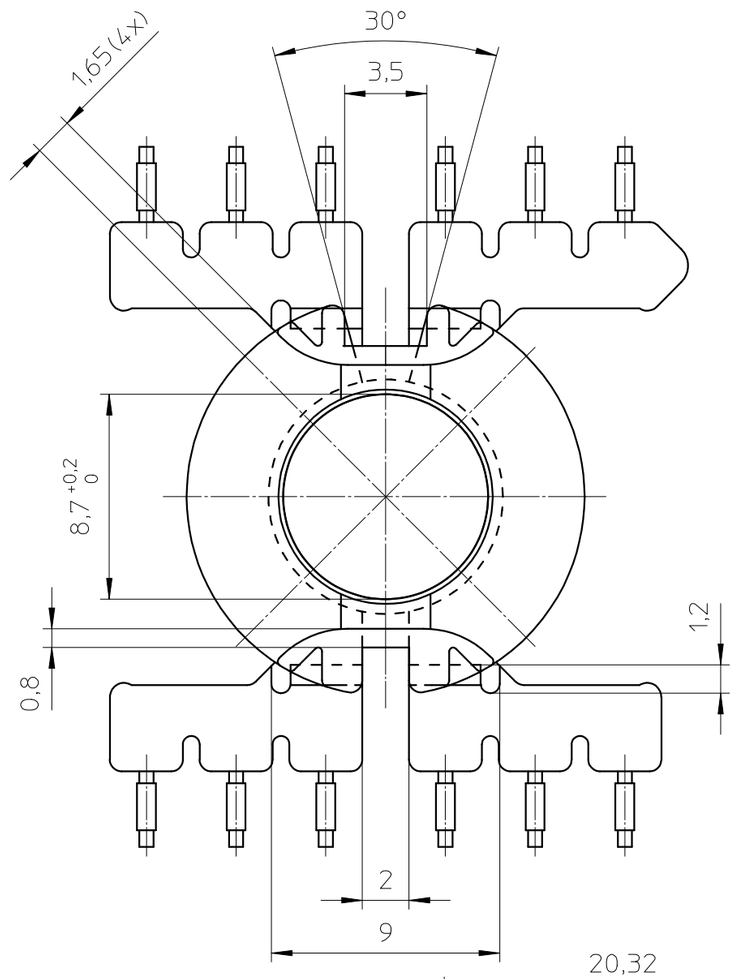

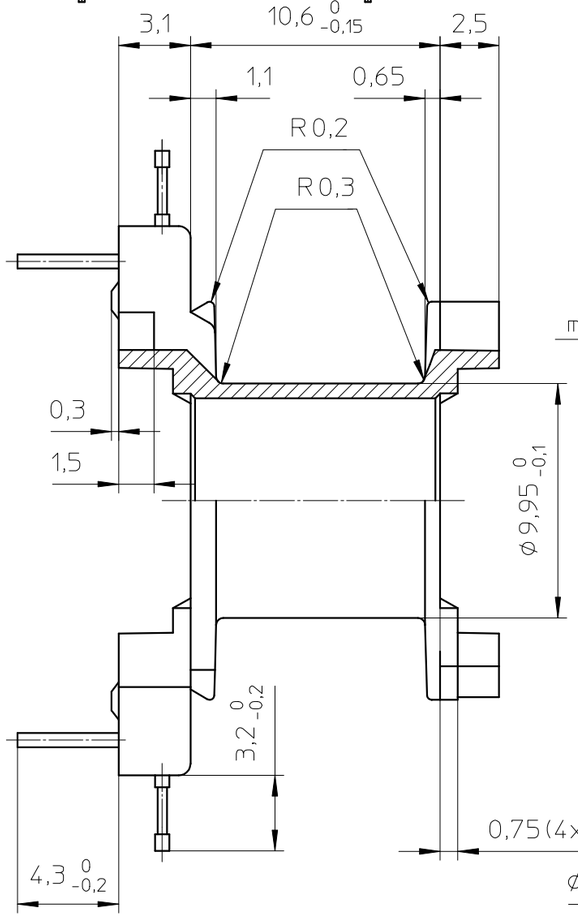

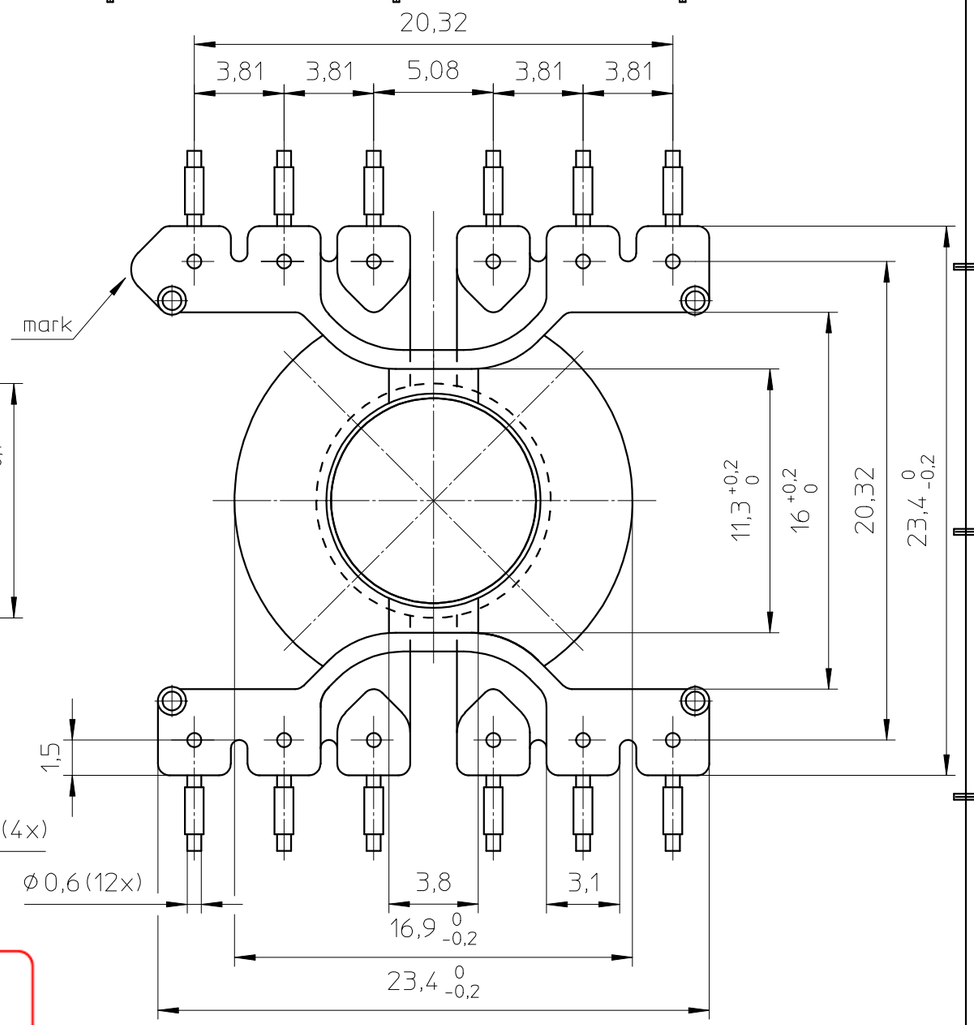

PHASED OUT

HOLE PATTERN :

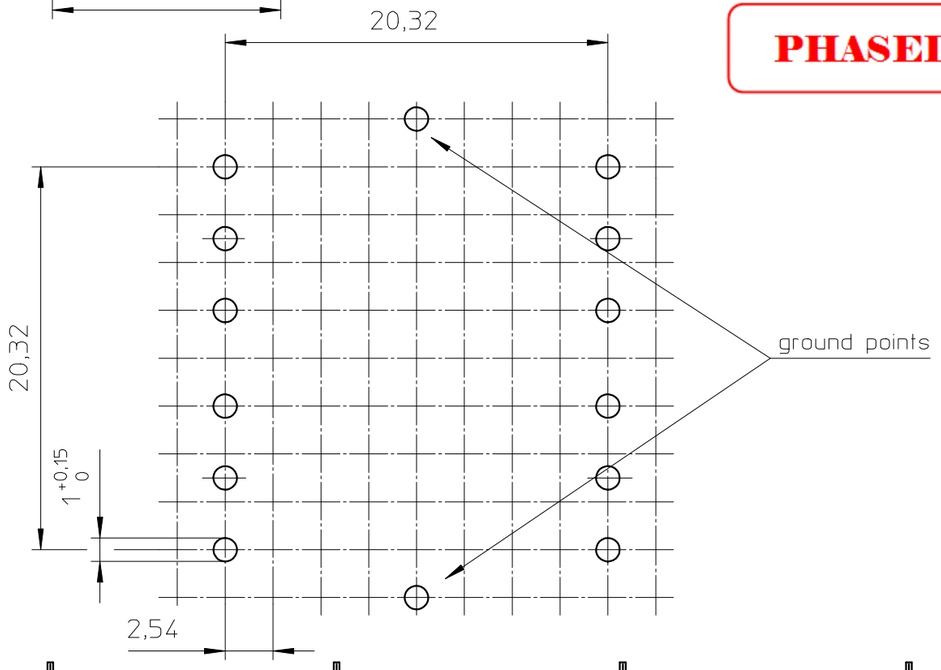

Coil former material:	Valox 420SEO (PBT), glass-reinforced. UL file number: E45329(R) - UL94V-0.
Pin material:	CuSn - Ni flash, Sn plated.
Max. operating temp.:	acc. to IEC 60 085 class F, 155°C.
Resistance to soldering heat:	acc. to IEC 60 068-2-20 Part 2, Test Tb, method 1B, 350°C-3,5s
Solderability:	acc. to IEC 60 068-2-20 Part 2, Test Ta, method 1, 235°C-2s
Min. winding area:	31 mm ^{2} .
Mean length of turn:	42 mm.

CLASS.NO.	CPV-RM8/I-1S-12PD	4322 021 34051	96-07-26		
2000-03-07			99-04-26		
			2000-03-07		
			2004-09-28		
			2005-09-01		
NAME NAAM M.Veekens	SUPERS. VERV.	001 SH BL. SH BL. 112 – 001	010		A3
MPA	CHECK CONTR.	DAT. 90-10-08	Property of Eigendom van	© FERROXCUBE 2000	