



1. PHYSICAL CHARACTERISTICS(mm)

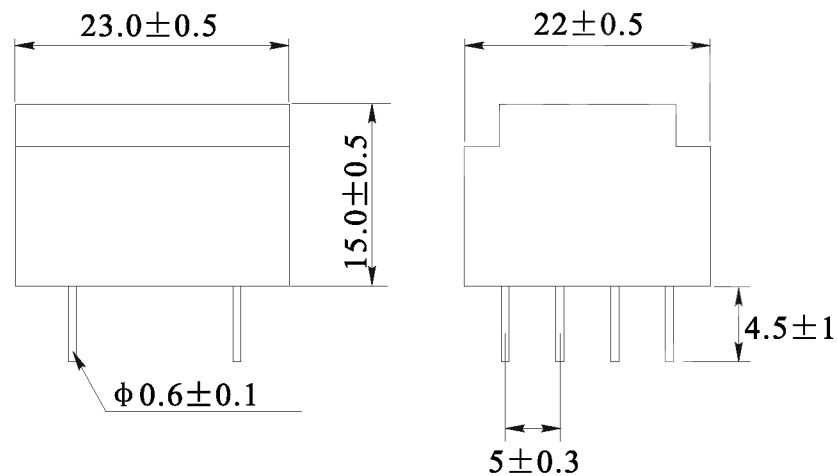

Bottom view


Top marking

1 ■	7 ■
AC230V 50/60Hz	
PE200602	
ta: 70°C 0.35VA	
4 ■	6 ■
9V,39mA	

NOTES:

Temp 20°C 48%RH
RoHS Compliant

2. ELECTRONICAL SCHEMATIC

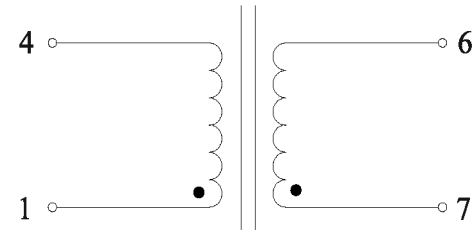

3. ELECTRONICAL SPECIFICATIONS

Pri voltage: 230V,50Hz-60Hz

Sec load voltage: 9.0V±0.5V@39mA

Noload votlage: 14V±0.5V

Output Power: 0.35VA

Hi-Pot: 3500V,50Hz,1mA,10S Pri to Sec

Note:

1.Solderability:leads shall meet MIL-STD-202,

Method 208D for solderability.

2.Flammability: UL94V-0

3.ASTM oxygen index: >28%