



1. PHYSICAL CHARACTERISTICS(mm)

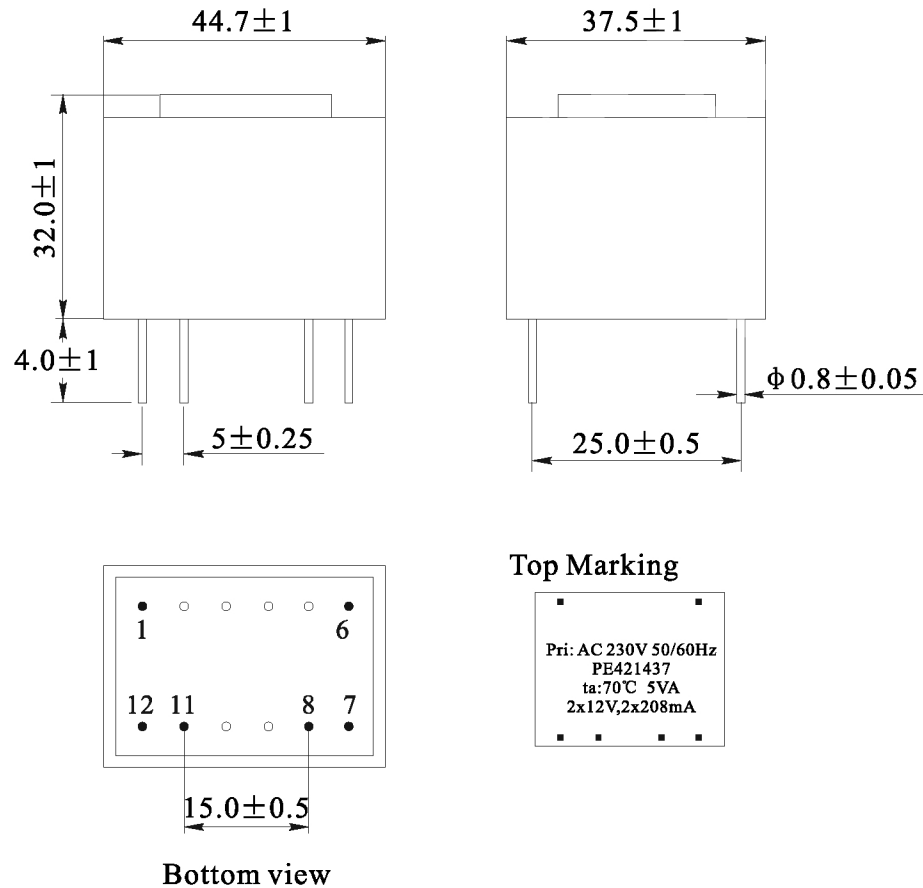

2. ELECTRONICAL SCHEMATIC

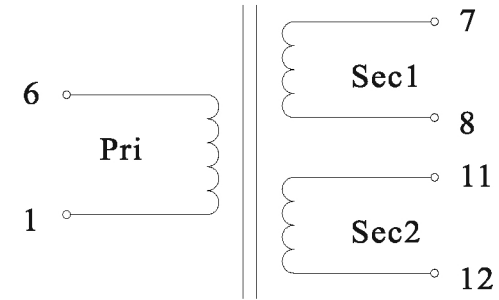

3. ELECTRONICAL SPECIFICATIONS

Pri voltage: 230V, 50/60Hz

Sec no load voltage: $2 \times 15.4V \pm 5\%$

Sec1 load voltage: $12V \pm 5\%$ @ 208mA

Sec2 load voltage: $12V \pm 5\%$ @ 208mA

Power: 5.0VA

Hi-Pot: 4000V/AC, 1mA, 10S Pri to Sec

Note:

1. Solderability: leads shall meet MIL-STD-202, Method 208D for solderability.

2. Flammability: UL94V-0

3. ASTM oxygen index: $>28\%$

NOTES:

Temp 20°C 48%RH

RoHS Compliant