

NOTES1:

UL Standard

- 1.Rated voltage/current : 300V / 10A
- 2.Withstanding voltage : AC1600V/1Min.

IEC Standard

1. Pollution degree	3
Overvoltage category	III
Rate impulse voltage(KV)	2.5KV
Rate voltage(V)	150V
Rate current(A)	10A

NOTES2:

- 1.Dimension shall be interpreted per ASME Y14.5-2009
- 2.Pitch : 3.50mm, Poles : N=02~24P
- 3.Operating temperature: -40℃~+105℃
- 4.Undimensioned tolerances:

Pitch range in mm		Nominal dimension range in mm		—	∩	∇
Over	Over	Over	Over	Over	Over	Over
6	10	30	60	100	150	0.1/10
TO	TO	TO	TO	TO	TO	
6	10	24	30	60	100	150
±0.15±0.20±0.30±0.30±0.30±0.50±0.70±1.00±1.30		±0.15±0.20±0.30±0.30±0.30±0.50±0.70±1.00±1.30		±2°		

5.RoHS Compliance

Ordering Information





JL8EDGVC - 350 XX E 01

Pitch
350=3.5H

No.of pins
2P~24P

Housing Color
B=Black
G=Green
U=Blue
R=Red
W=White
Y=Yellow
D=Orange
E=Grey

Packing
0=Pe bag
T=Tube
A=Tray

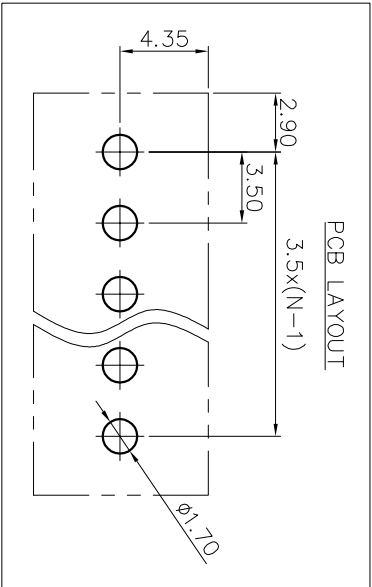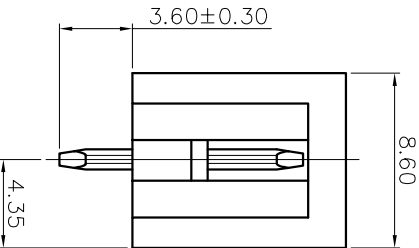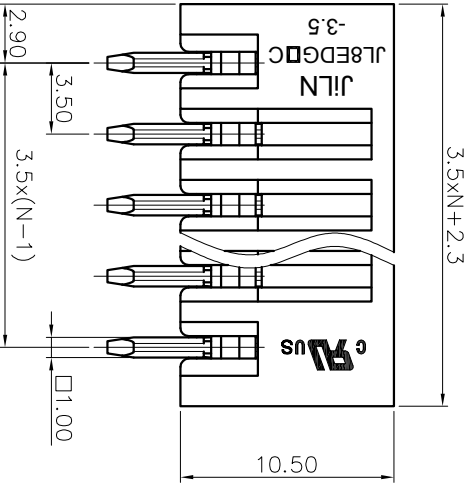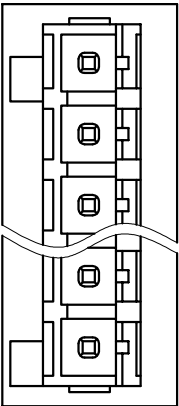

REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE

DRAW	SHUANGPING ZHENG	SCALE	FIT	jiln® 东莞市锦凌电子有限公司 DONGGUAN JINLING ELECTRONIC CO., LTD		
		UNIT	mm			
CHECK	LICHAD LIU	SIZE	A4	PART NO.	JL8EDGVC-350XXE01	
		SHEET	1/1	TITLE:		
APPROVE	YONGLIANG GAO	PRD		JL8EDGVC-3. 5-XXP插拔式公座/针型 连接器/直针/灰色		

jiln 东莞市锦凌电子有限公司
DONGGUAN JINLING ELECTRONIC CO., LTD