SPECIFICATION FOR APPROVAL

CUSTOMER	Lepcos	
P/N DRH40*27*21		
Shirui's P/N	Vertical DRH40*27*21	
SPEC. NO.	0001A	
DATE	Nov. 20, 2019	

Customer's Approval: PLS fax your approved data sheet and suggestion to our company in a month. If not, we assume that you have approved our data sheet.

承认	审核	作成	
Admit that	xamine and verif	PREPARED BY	
邢旭华	易克松	张国强	

客户承认					
The	customer	is	admitted		


REVISION

Customer	Lepcos		aterial	NX-UI:600	
P/N	DRH40*27*21	SPEC.NO.		0001A	
Name	Vertical DRH40*27*21				
Rev.Record					
REV.NO.	CONTENTS		DATE	DRAWN	
	L				

製 品 规 格 书(SPECIFICATION)

Customer	Lepcos	Material	NX-UI:600
P/N	DRH40*27*25	SPEC.NO.	0001A
Name	Vertical DRH40*27*25		

1. Shape and Dimensions unit: mm

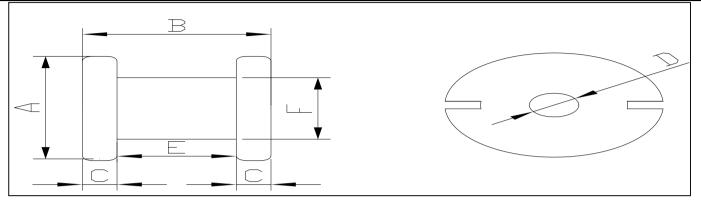

Specification and Testing Instrument

Α	В	С	D	E	F		
40	27	4.2	5.0	18.5	21		
±1.5	±1.0	±0.5	±0.5	±1.0	±0.8		
Projector							

2. Characteristics

Item	Specification	Test Condition	Testing Instrument
L(uH)			

Notice: 1.coating on the cores must be homogeneous and smooth, bright and clean.

- 2. One blade has notch:one side is about 5.0 depth, the other side is about 7.5 depth; One blade without notch.
- 3. central leg should be in line with two blades, no misplace.

3. The standard of the appearance judge

Standard of appearance judge: critical defect, major defect, with 0, 1 as benchmark

If customers have special requirement, standard of judge is according to agreement with customers.

No.4/4

Standard of appearance judge

Name <u>DRH-CORE</u>

Item	Position	Standard of appearance	Reference
D e f	Upper appeara nce	B E C C	①Crack area less than 0.1mm²,depth less than 0.5, not more than 2 places of cracks on one side.
e c t s	Notch	B E C C	①area inside notch less than 0.1mm²,not more than one cracks inside one notch
b u m p	all sides	B	①height of bump less than 0.1mm
R e m a r k	blades		