


HOLE PATTERN:

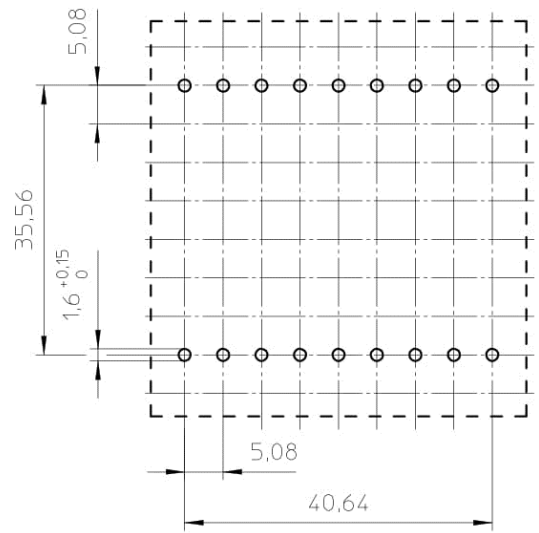

Coil former material: Valox 420SE0 (PBT), glass-reinforced.
 UL file number: E45329(R) - UL94V-0.

Pin material: Copper-plated steel wire, Sn plated.

Max. operating temp.: acc. to IEC 60 085 class F, 155°C.

Resistance to soldering heat: acc. to IEC 60 068-2-20 Part 2, Test Tb, method 1B, 350°C - 3.5sec.

Solderability: acc. to IEC 60 068-2-20 Part 2, Test Ta, method 1, 235°C - 2sec.

Min. winding area: 215 mm².

Mean length of turn: 77 mm.

CLASSNO.	CPH-ETD44-1S-18P-C		4322 021 01661	96-02-06
				96-08-27
				97-10-31
				2004-09-28
				2020-10-26
NAME NAAM	M.Marszalek	SUPERS. VERV.	001	SH BL
MPA	CHECK CONTR.	DAT.	96-02-06	Property of Eigendom van
			112 - 001	069
			© FERROXCUBE 2008	
				A3