



1. PHYSICAL CHARACTERISTICS (mm)

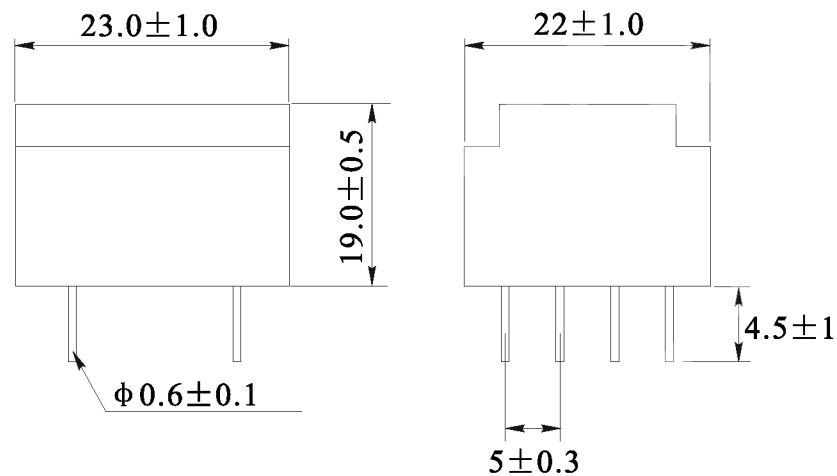


Bottom view

Top marking

1	8
AC230V 50/60Hz	
PE201017	
ta: 70°C 0.5VA	
2*6V, 42mA	
4	5

2. ELECTRONICAL SCHEMATIC

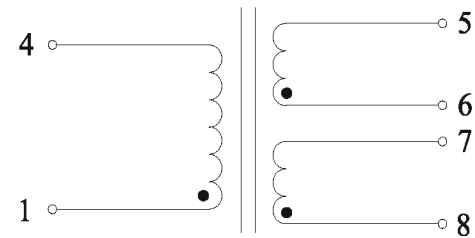

3. ELECTRONICAL SPECIFICATIONS

Pri voltage: 230V, 50Hz-60Hz

Sec load voltage: $2 \times 6.0V \pm 0.5V @ 42mA$

No load voltage: $2 \times 9.6V$ Ref

Output Power: 0.5VA

Hi-Pot: 3500V, 50Hz, 1mA, 10S Pri to Sec

Note:

1. Solderability: leads shall meet MIL-STD-202,

Method 208D for solderability.

2. Flammability: UL94V-0

3. ASTM oxygen index: $>28\%$

NOTES:

Temp 20°C 48%RH

RoHS Compliant