



1. PHYSICAL CHARACTERISTICS(mm)

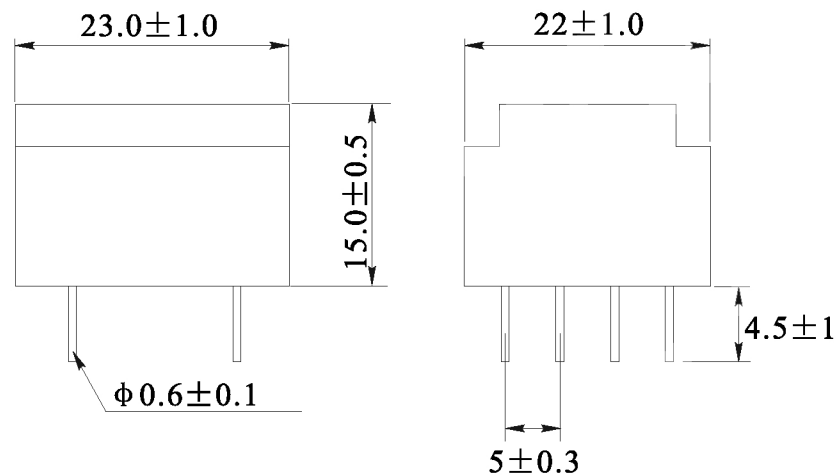

Bottom view


Top marking

1	▪	8
AC230V 50/60Hz		
PE200607		
ta: 70°C 0.35VA		
4	▪	5
2*6V,29mA		

NOTES:

Temp 20°C 48%RH
RoHS Compliant

2. ELECTRONICAL SCHEMATIC

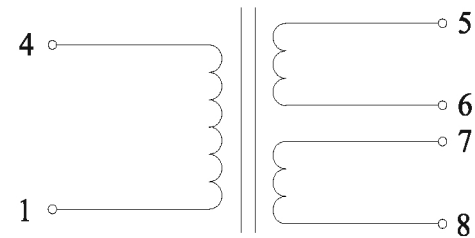

3. ELECTRONICAL SPECIFICATIONS

Pri voltage: 230V,50Hz-60Hz

Sec load voltage: 2X6.0V ± 0.8V @ 29mA

Noload votlage: 2X10.95V ± 0.5V @ 18mA

Output Power: 0.35VA

Hi-Pot: 3500V,50Hz,1mA,10S Pri to Sec

Note:

1.Solderability:leads shall meet MIL-STD-202,

Method 208D for solderability.

2.Flammability: UL94V-0

3.ASTM oxygen index: >28%