



1. PHYSICAL CHARACTERISTICS (mm)

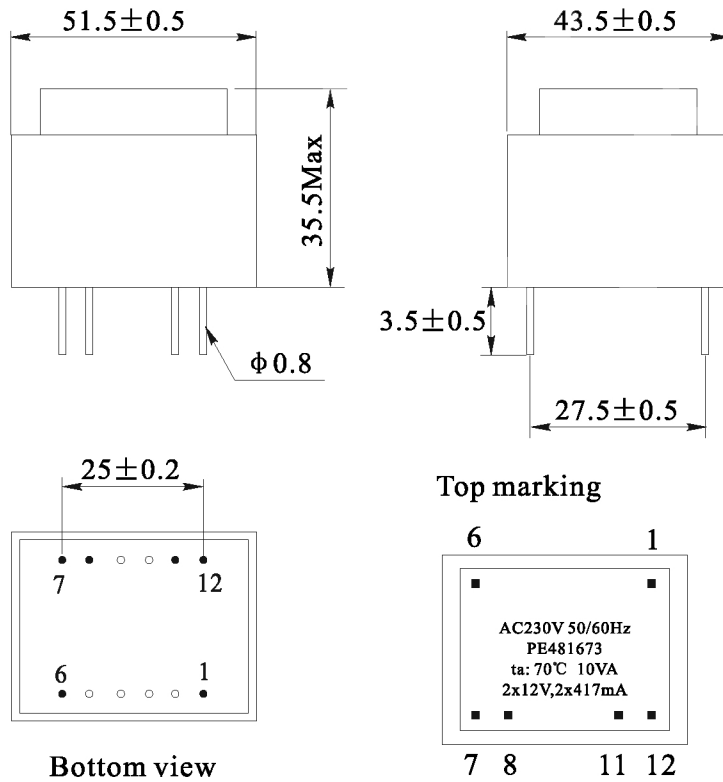

2. ELECTRONICAL SCHEMATIC

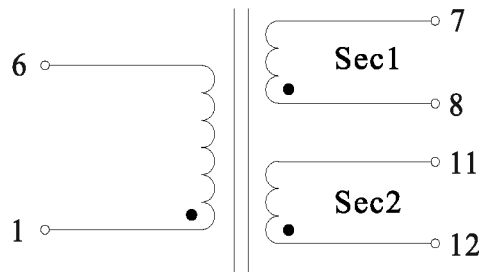

3. ELECTRONICAL SPECIFICATIONS

Pri voltage: 230V, 50Hz

Load voltage: Sec1: $12.0V \pm 0.5V @ 417mA$

Sec2: $12.0V \pm 0.5V @ 417mA$

No-load voltage: Sec1: $15V \pm 5\%$

Sec2: $15V \pm 5\%$

Output Power: 10VA

Hi-Pot: 4000V, 50Hz, 1mA, 10S Pri to Sec

Note:

1. Solderability: leads shall meet MIL-STD-202,

Method 208D for solderability.

2. Flammability: UL94V-0

3. ASTM oxygen index: $>28\%$