




1. PHYSICAL CHARACTERISTICS (mm)

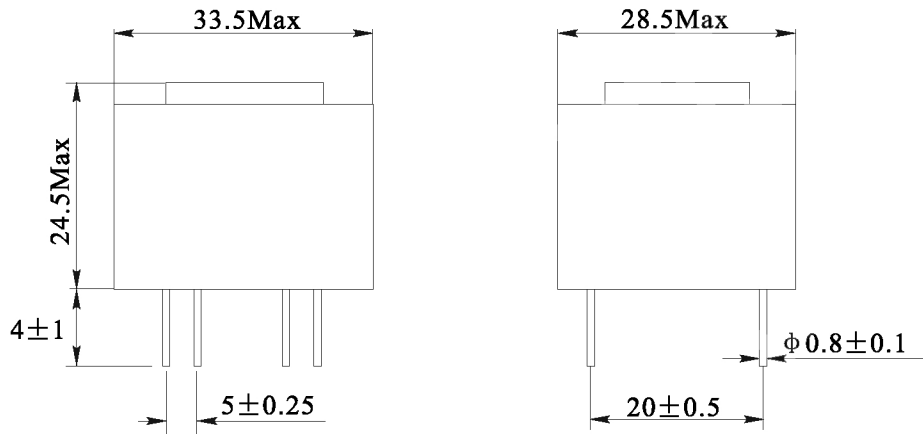

Bottom view




Top marking

NOTES:

Temp 20°C 48%RH
RoHS Compliant

2. ELECTRONICAL SCHEMATIC

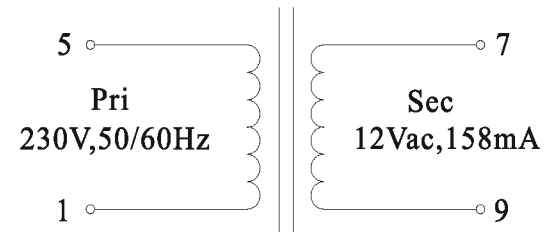

3. ELECTRONICAL SPECIFICATIONS

Pri voltage: 230V, 50Hz

Sec load voltage: 12.0V ± 5% @ 158mA

Noload voltage: 17.2V Ref

Output Power: 1.9VA

Hi-Pot: 4000V, 50Hz, 1mA, 10S Pri to Sec

Note:

1. Solderability: leads shall meet MIL-STD-202,

Method 208D for solderability.

2. Flammability: UL94V-0

3. ASTM oxygen index: >28%