



1. PHYSICAL CHARACTERISTICS(mm)




Bottom view

Top marking

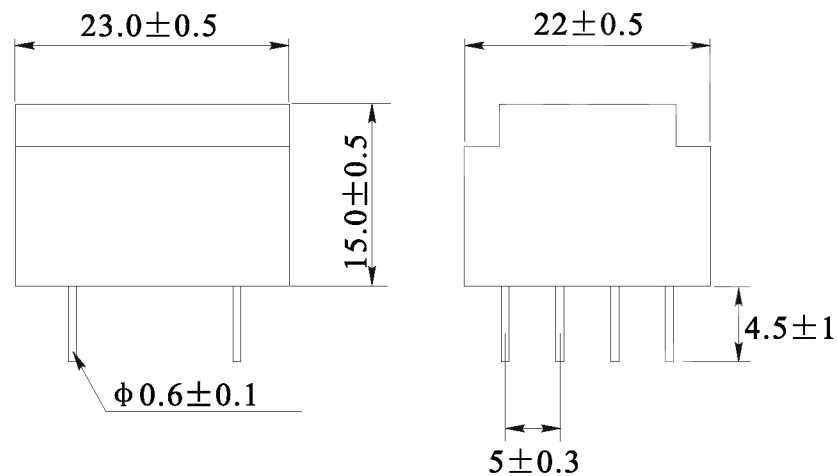

2. ELECTRONICAL SCHEMATIC

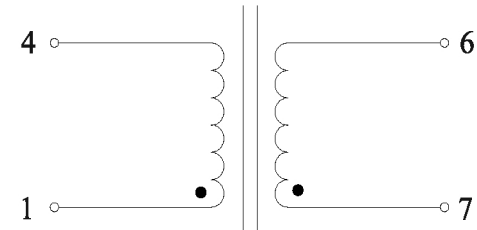

3. ELECTRONICAL SPECIFICATIONS

Pri voltage: 230V,50Hz-60Hz

Sec load voltage: $6.0V \pm 0.5V @ 58mA$

Noload votlage: $10.8V \pm 0.5V$

Output Power: 0.35VA

Hi-Pot: 3500V,50Hz,1mA,10S Pri to Sec

Note:

1.Solderability:leads shall meet MIL-STD-202,

Method 208D for solderability.

2.Flammability: UL94V-0

3.ASTM oxygen index: >28%

NOTES:

Temp 20°C 48%RH

RoHS Compliant