



## 1. PHYSICAL CHARACTERISTICS (mm)

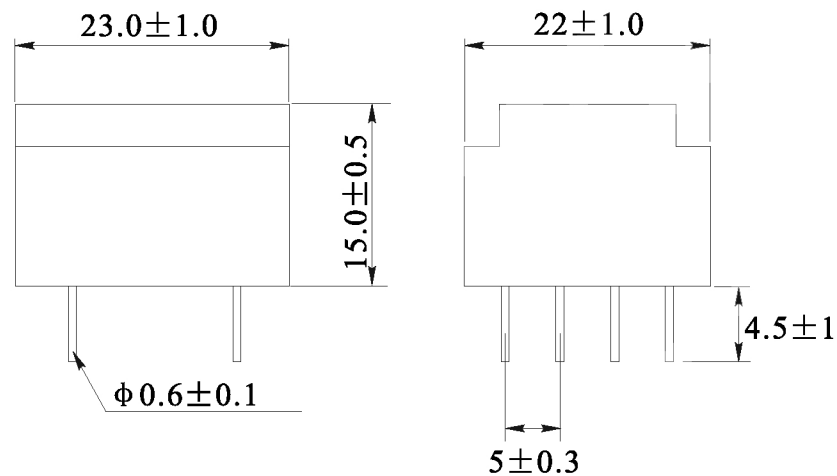


Bottom view

Top marking

|                 |     |
|-----------------|-----|
| 1 ■             |     |
| AC230V 50/60Hz  | ■ 7 |
| PE200604        |     |
| ta: 70°C 0.35VA | ■ 6 |
| 15V, 23mA       |     |
| 4 ■             |     |

## 2. ELECTRONICAL SCHEMATIC

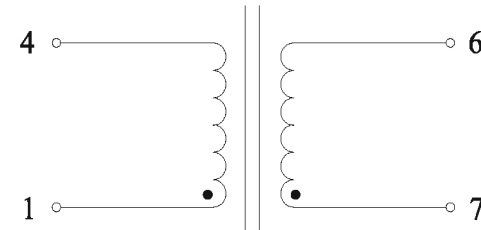

## 3. ELECTRONICAL SPECIFICATIONS

Pri voltage: 230V, 50Hz-60Hz

Sec load voltage:  $15.0V \pm 5\%$  @ 23mA

No load voltage: 27V Ref

Output Power: 0.35VA

Hi-Pot: 3500V, 50Hz, 1mA, 10S Pri to Sec

Note:

1. Solderability: leads shall meet MIL-STD-202,

Method 208D for solderability.

2. Flammability: UL94V-0

3. ASTM oxygen index: >28%

## NOTES:

Temp 20°C 48%RH

RoHS Compliant