



1. PHYSICAL CHARACTERISTICS (mm)

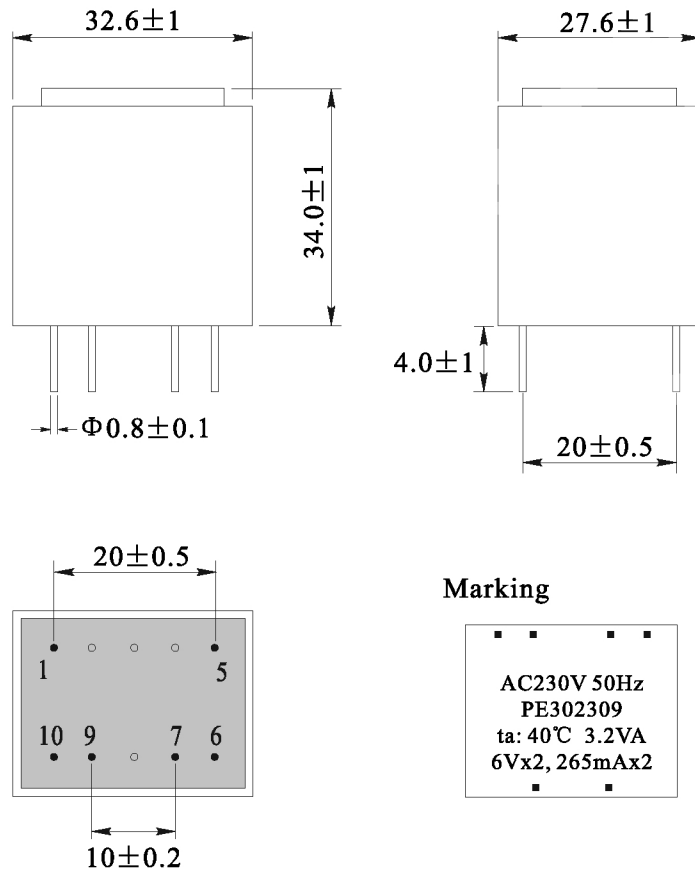

2. ELECTRONICAL SCHEMATIC

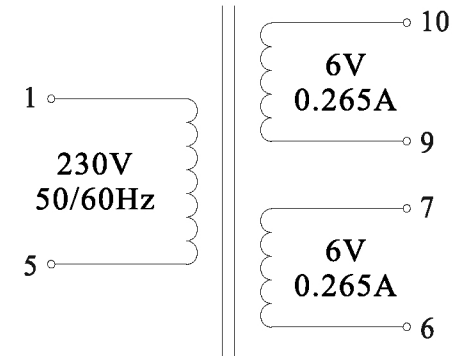

3. ELECTRONICAL SPECIFICATIONS

Pri voltage: 230V, 50/60Hz

No load sec voltage: 11.5Vac Ref

Load Sec voltage: 6-7: 6Vac $\pm$ 0.5Vac @ 0.265A

9-10: 6Vac $\pm$ 0.5Vac @ 0.265A

Hi-Pot: 4000V, 50Hz, 5mA, 60S Pri to Secondary

Operating temperature: -40°C to +85°C