


HOLE PATTERN :

Space requirement 5x6 pitch

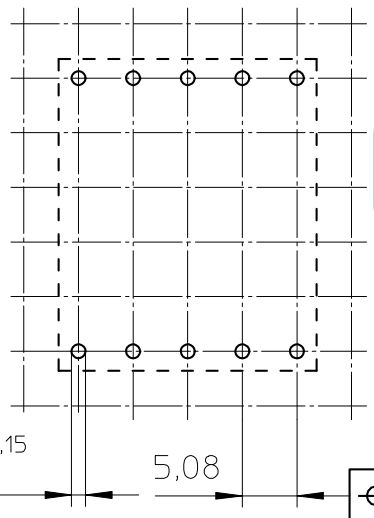

**PHASED OUT**

- Coil former material: Sumikon PM-9630 (PF), glass-reinforced.
- UL file number: E41429 - UL94V-0.
- Pin material: CuSn - Ni flash, Sn plated.
- Max. operating temp.: acc. to IEC 60 085 class H, 180°C.
- Resist. to soldering heat: acc. to IEC 60 068-2-20 Part 2, Test Tb, method 1B, 350°C - 3,5s.
- Solderability: acc. to IEC 60 068-2-20 Part 2, Test Ta, method 1, 235°C - 2s.
- Min. winding area: 80 mm<sup>2</sup>.
- Mean length of turn: 56 mm.

CLASSNO.				07-10-22	
		CSH-E30/15/7-1S-10P-IZ		4322 021 06841	
07-10-22					
NAME NAAM	A.Wojtasz	SUPERS. VERV.		1 SH BL.	SH BL. 112 - 001 010
MPA	CHECK CONTR.	DAT.	07-10-22	Property of Eigendom van	© FERROXCUBE 2007
					A4