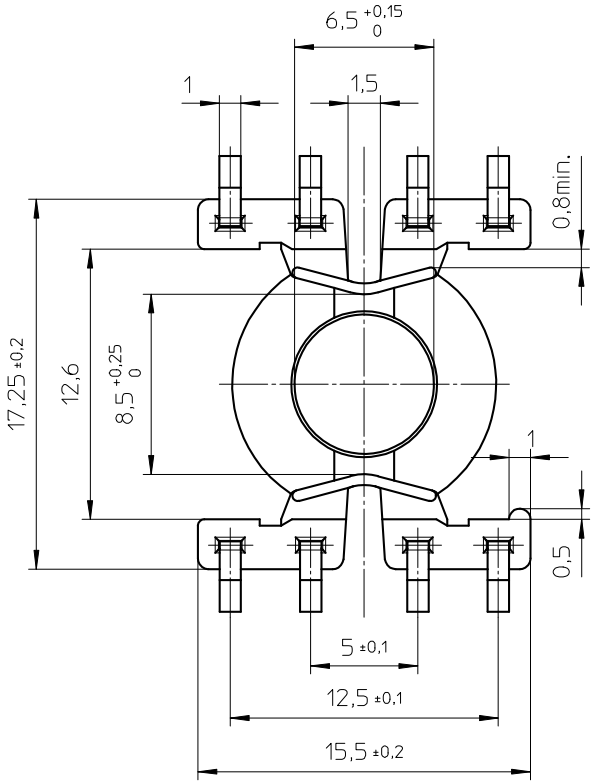

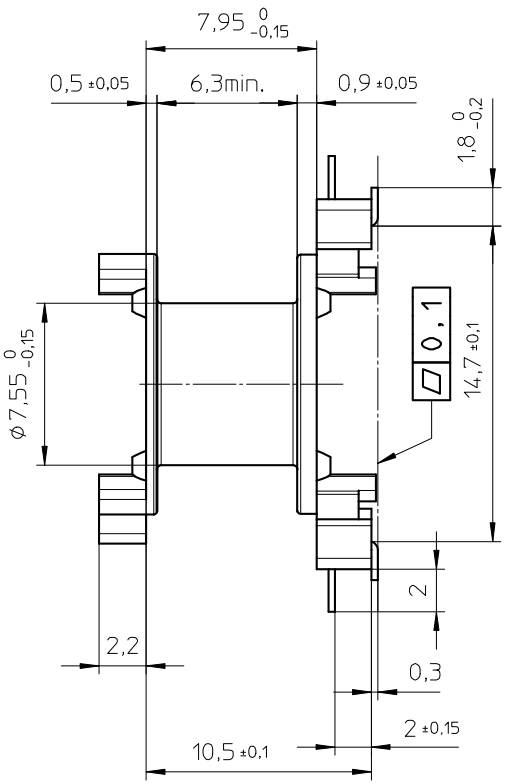

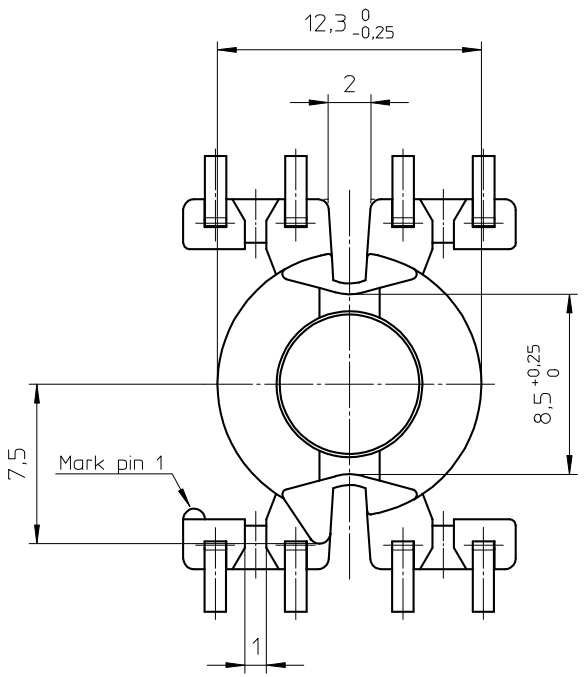

PROPOSED PAD ARRANGEMENT:

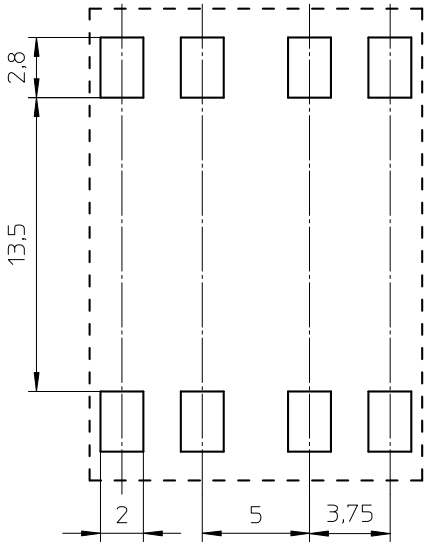

Coil former material:	Sumikon PM9630 (PF), glass-reinforced.
	UL file number: E41429(M) - UL94V-0.
Pin material:	CuSn6, Sn plated.
Max. operating temp.:	acc. to IEC 60 085 class F, 155°C.
Resistance to soldering heat:	acc. to IEC 60 068-2-20 Part 2, Test Tb, method 1B, 350°C-3,5s.
Solderability:	acc. to IEC 60 068-2-20 Part 2, Test Ta, method 1, 235°C-2s.
Min. winding area:	14,2 mm^2.
Mean length of turn:	31,4 mm.

CLASS.NO.	CSVS-RM6S-1S-8P-B	4322 021 03411	99-09-13
00-01-21			00-01-21
			00-05-16
			05-03-07
			14-02-28
NAME NAAM M.Marszalek	SUPERS. VERV.	001 SH BL. SH BL. 112 – 001 069	A3
MPA	CHECK CONTR.	DAT. 99-07-01	Property of Eigendom van © FERROXCUBE Nederland BV 2005