

NOTES1:

UL Standard

1.Rated voltage/current : 300V / 10A

2.Withstanding voltage : AC2000V/1Min.

3.Wire range : 26~12AWG

IEC Standard

1. Pollution degree	2
Overvoltage category	III
Rate impulse voltage(KV)	4KV
Rate voltage(V)	320V
Rate current(A)	20A

2.Wire range : 0.2~2.5mm²

NOTES2:

- 1.Dimension shall be interpreted per ASME Y14.5-2009
- 2.Pitch : 5.08mm, Poles : N=02~24P
- 3.Stripping length : 9~10mm
- 4.Operating temperature:-40°C~+105°C
- 5.Undimensioned tolerances:

Pitch range in mm			Nominal dimension range in mm							- 0.1/10	
TO	Over 6 TO 10	Over 10 TO 24	TO	Over 30 TO 60	Over 60 TO 100	Over 100 TO 150	Over 150			0.1/10	
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30			±2°	

6.RoHS Compliance

Ordering Information






JL 2EDGKDM - 508 XX X XX

Pitch
508=5.08PH

No.of pins
2P~24P

Housing Color
B=Black
G=Green
U=Blue
R=Red
W=White
Y=Yellow
O=Orange
E=Grey

Serial code

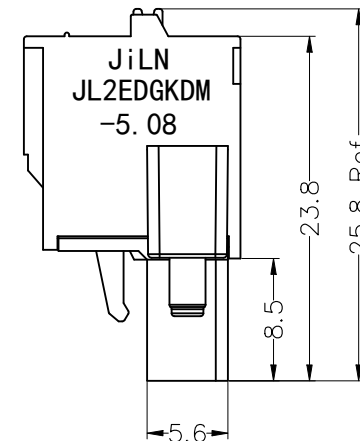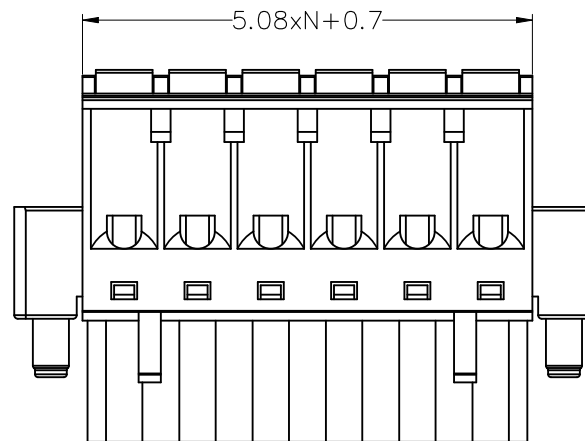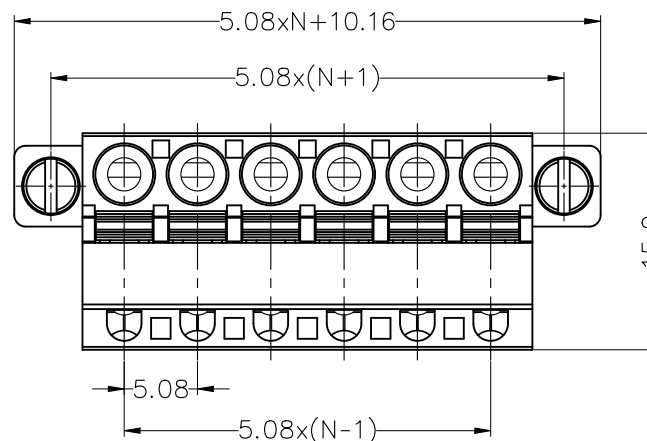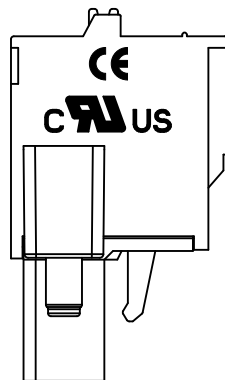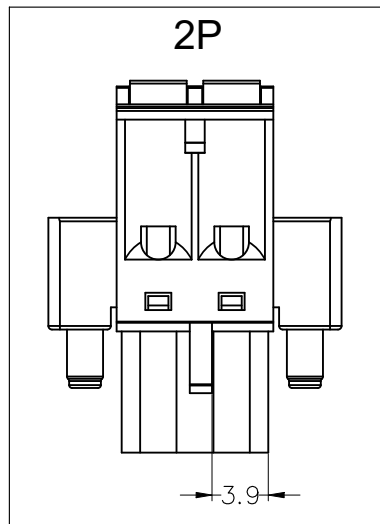

REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE
A0		NEW		21.06.11

DRAW	WH.LU	SCALE	FIT	JILN®东莞市锦凌电子有限公司 DONGGUAN JINLING ELECTRONIC CO.,LTD	
		UNIT	mm		
CHECK	W.CHEN	SIZE	A4	PART NO.	JL2EDGKDM-508XXXXX
		SHEET	1/1		
APPROVE	WH.LU	PROJ.		TITLE:	JL2EDGKDM-5.08-XXP插拔式母座/带耳