

NOTES1:

UL Standard

- 1.Rated voltage/current : 300V / 10A
- 2.Withstanding voltage : AC1600V/1Min.
- 3.Wire range : 28~14AWG

IEC Standard

1. Pollution degree	2	2	3
Overvoltage category	II	III	III
Rate impulse voltage(KV)	2.5KV	2.5KV	2.5KV
Rate voltage(V)	400V	160V	130V
Rate current(A)	10A		

2. Wire range : 0.2~1.5mm²

NOTES2:

- 1.Dimension shall be interpreted per ASME Y14.5-2009
- 2.Pitch : 3.50mm, Poles : N=02~24P
- 3.Stripping length : 6~7mm
- 4.Operating temperature: -40°C~+105°C
- 5.Undimensioned tolerances:

Pitch range in mm		Nominal dimension range in mm					
Over	Over	Over	Over	Over	Over	0.1/10	
6	10	10	30	60	100	150	
TO	TO	TO	TO	TO	TO		<
6	10	24	30	60	100	150	
±0.13±0.20±0.30±0.30±0.50±0.70±1.00±1.30							±2°

6.RoHS Compliance

Ordering Information

JL8EDGK - 350 XX E 0 1

Pitch
350=3.5H

No.of pins
2P~24P

Housing Color

B=Black

G=Green

U=Blue

R=Red

W=White

Y=Yellow

D=Orange







E=Grey

Packing

0=Pe bag

T=Tube

A=Tray

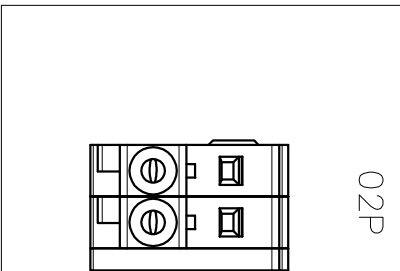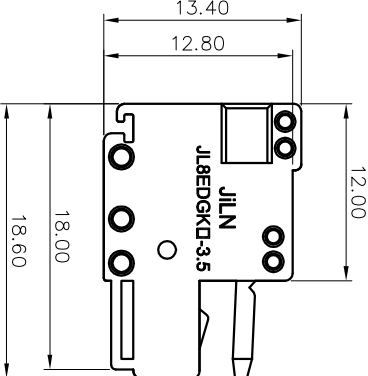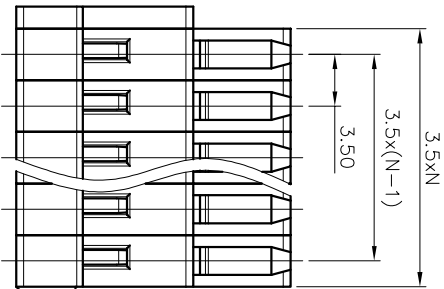

REVISION RECORD			
REV	ECN	DESCRIPTION	DRFT DATE
A		NEW	22.3.24

jiln 东莞市锦凌电子有限公司
DONGGUAN JINLING ELECTRONIC CO., LTD

DRAW	SHUANGPING ZHENG	SCALE	FIT	PART NO. JL8EDGK-350XXE01	
CHECK	LICHAD LIU	UNIT	mm		
APPROVE	YONGLIANG GAO	SIZE	A4		
		SHEET	1/1	TITLE: JL8EDGK-3.5-XXP 插拔式母座/孔型连 接器/灰色	
		PROJ.			