




1. PHYSICAL CHARACTERISTICS (mm)

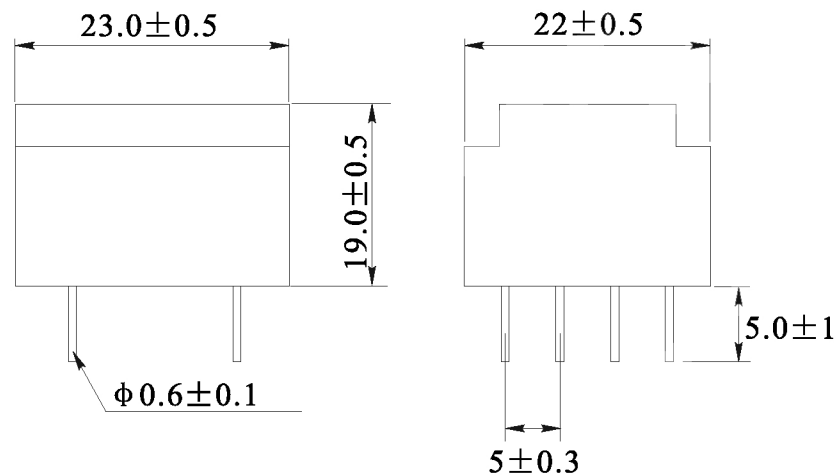

Bottom view


Top marking



NOTES:

Temp 20°C 48%RH
RoHS Compliant

2. ELECTRONICAL SCHEMATIC

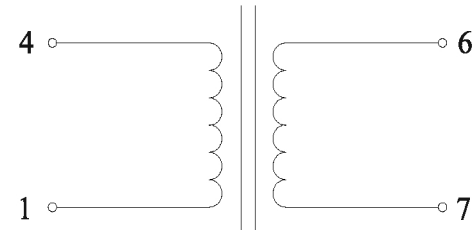

3. ELECTRONICAL SPECIFICATIONS

Pri voltage: 230V, 50Hz-60Hz

Sec load voltage: $12.0V \pm 5\%$ @ 42mA

No load voltage: $16.5V \pm 5\%$

Output Power: 0.5VA

Hi-Pot: 3500V, 50Hz, 1mA, 10S Pri to Sec

Note:

1. Solderability: leads shall meet MIL-STD-202,

Method 208D for solderability.

2. Flammability: UL94V-0

3. ASTM oxygen index: >28%