


1. PHYSICAL CHARACTERISTICS(mm)

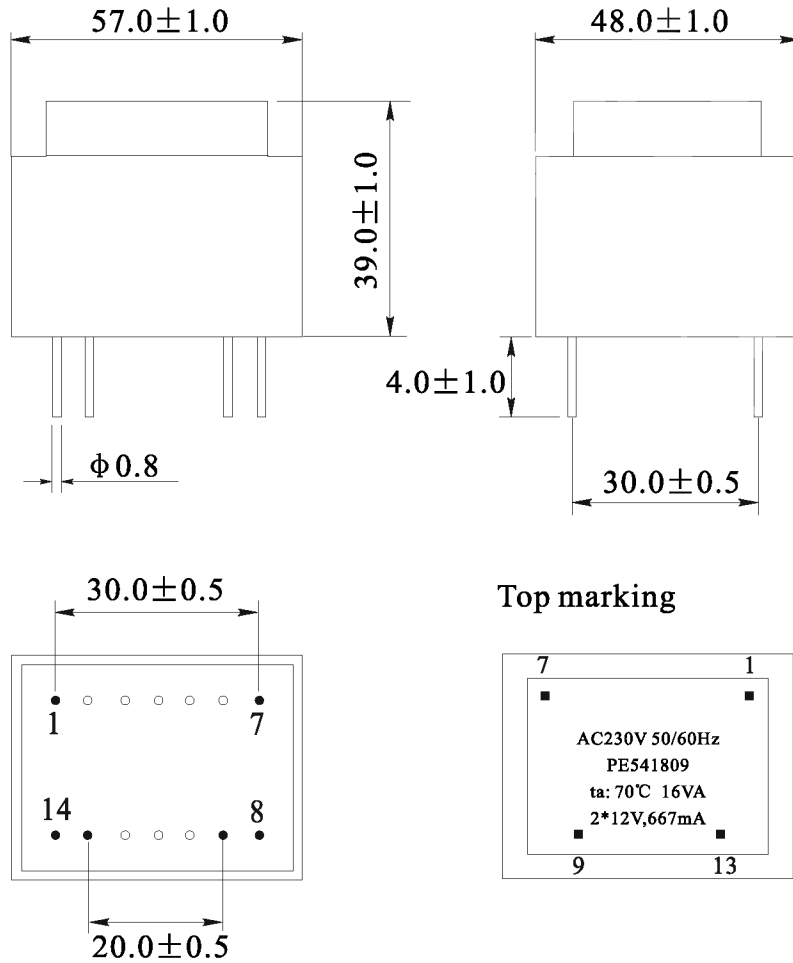


Bottom view

Top marking

NOTES:

Temp 20°C 48%RH
RoHS Compliant

2. ELECTRONICAL SCHEMATIC

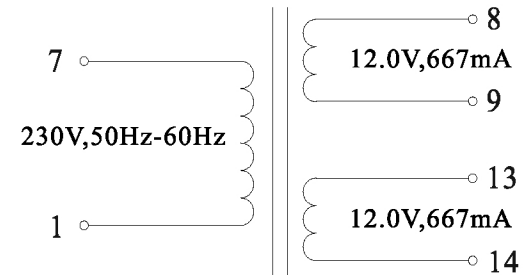

3. ELECTRONICAL SPECIFICATIONS

Pri voltage: 230V,50Hz-60Hz

Sec load voltage: Pin8-9: $12.0V \pm 5\%V @ 667mA$

Pin13-14: $12.0V \pm 5\%V @ 667mA$

Noload votlage: Pin8-9: $14.7Vac \pm 5\%V$

Pin13-14: $14.7Vac \pm 5\%V$

Output Power: 16VA

Hi-Pot: 4000V,50Hz,1mA,3S Pri to Sec