




1. PHYSICAL CHARACTERISTICS (mm)

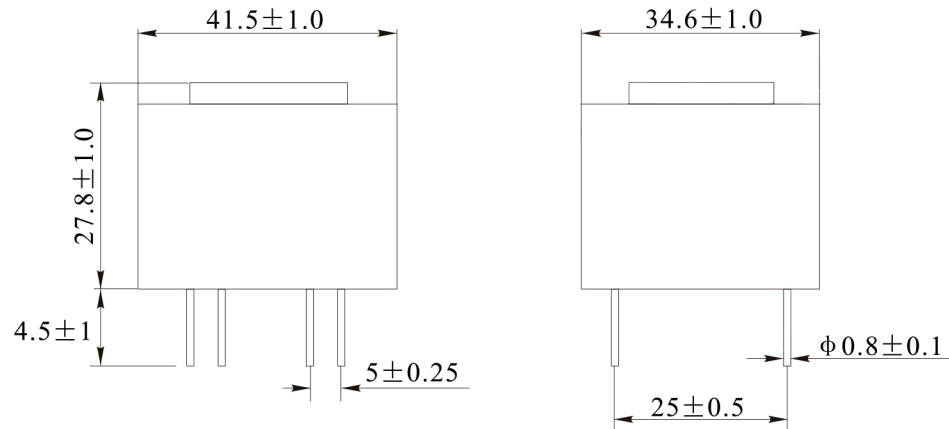


Bottom view



Top marking

2. ELECTRONICAL SCHEMATIC

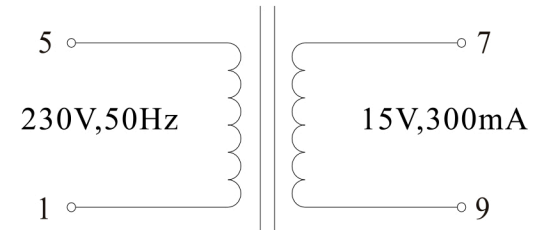

3. ELECTRONICAL SPECIFICATIONS

Pri voltage: 230V, 50Hz

Sec load voltage: $15.0V \pm 5\%$ @ 300mA

No load voltage: $21.2V \pm 5\%$ @ 15mA Max

Output Power: 4.5VA

Hi-Pot: 4000V, 50Hz, 1mA, 10S Pri to Sec

Note:

1. Solderability: leads shall meet MIL-STD-202,

Method 208D for solderability.

2. Flammability: UL94V-0

3. ASTM oxygen index: >28%

NOTES:

Temp 20°C 48%RH

RoHS Compliant