

NTC thermistors for temperature measurement

SMD NTC thermistors, case size 0603 (1608), automotive series

Series/Type: B573**V5
Date: March 2013

© EPCOS AG 2013. Reproduction, publication and dissemination of this publication, enclosures hereto and the information contained therein without EPCOS' prior express consent is prohibited.



B573**V5

SMD NTC thermistors, case size 0603 (1608)

Automotive series

SMD

Applications

■ Temperature measurement and compensation

Features

- Qualification based on AEC-Q200 Rev-D
- Multilayer SMD NTC with inner electrodes
- Nickel barrier termination
- For temperature measurement up to 150 °C
- Excellent long-term aging stability in high temperature and high humidity environment


Options

Alternative resistance ratings, resistance tolerances and B value tolerances available on request.

Delivery mode

Cardboard tape, 180-mm reel

Dimensional drawing



Dimensions in mm Approx. weight 6 mg

General technical data

| Operating temperature range | | T _{op} | -40 150 | °C |
|-------------------------------|--------------------|------------------------------------|------------|------|
| Max. power | (at 25 °C, on PCB) | P ₂₅ ¹⁾ | 180 | mW |
| Resistance tolerance | | $\Delta R_R/R_R$ | ±1, ±3, ±5 | % |
| Rated temperature | | T_R | 25 | °C |
| Dissipation factor | (on PCB) | $\delta_{\text{th}}{}^{\text{1)}}$ | approx. 3 | mW/K |
| Thermal cooling time constant | (on PCB) | $\tau_c^{-1)}$ | approx. 4 | s |
| Heat capacity | | $C_{th}^{1)}$ | approx. 12 | mJ/K |

¹⁾ Depends on mounting situation



R573**V5

SMD NTC thermistors, case size 0603 (1608)

Automotive series

SMD

Electrical specification and ordering codes

| R ₂₅ | $\Delta R_R/R_R$ | No. of R/T | B _{25/50} | B _{25/85} | B _{25/100} | Ordering code |
|-----------------|------------------|----------------|--------------------|--------------------|---------------------|-----------------|
| Ω | % | characteristic | K | K | K | |
| 10 k | ±1 | 8509 | 3380 | 3435 | 3455 ±1% | B57332V5103F360 |
| 10 k | ±3, ±5 | 8509 | 3380 | 3435 | 3455 ±1% | B57332V5103+360 |
| 10 k | ±3, ±5 | 8500 | 3590 | 3635 | 3650 ±3% | B57342V5103+060 |
| 10 k | ±3, ±5 | 8502 | 3940 | 3980 | 4000 ±3% | B57351V5103+060 |
| 10 k | ±3, ±5 | 8507 | 4386 | 4455 | 4480 ±3% | B57352V5103+060 |
| 22 k | ±3, ±5 | 8502 | 3940 | 3980 | 4000 ±3% | B57351V5223+060 |
| 22 k | ±3, ±5 | 8507 | 4386 | 4455 | 4480 ±3% | B57352V5223+060 |
| 47 k | ±3, ±5 | 8507 | 4386 | 4455 | 4480 ±3% | B57352V5473+060 |
| 100 k | ±1 | 8507 | 4386 | 4455 | 4480 ±1% | B57352V5104F360 |
| 100 k | ±3, ±5 | 8507 | 4386 | 4455 | 4480 ±1% | B57352V5104+360 |
| 100 k | ±3, ±5 | 8507 | 4386 | 4455 | 4480 ±3% | B57352V5104+060 |

+ = Resistance tolerance

 $F = \pm 1\%$ (only for type B57332V5103F360 and B57352V5104F360)

H = ±3%

 $J = \pm 5\%$



B573**V5

SMD NTC thermistors, case size 0603 (1608)

Automotive series

SMD

Reliability data

Tests of SMD NTC thermistors are based on AEC-Q200 Rev-D. The parts are mounted on standardized PCB.

| Test | Standard | Test conditions | $\Delta R_{25}/R_{25}$ (typical) | Remarks |
|--------------------------------------|------------------------------|---|----------------------------------|-----------------------------|
| Pre- and post-stress electrical test | | Resistance at: 25 °C and 100 °C | | |
| High temperature exposure (storage) | MIL-STD-202, method 108 | Test temperature: 150 °C Duration: 1000 h Unpowered | < 5%1) | |
| Temperature cycling | JESD22, method JA-104 | Lower test temperature: -40 °C Upper test temperature: 150 °C Number of cycles: 1000 Transfer time: < 10 s Dwell time: 15 min Air – Air | < 5%²) | |
| Biased humidity | MIL-STD-202, method 103 | Test temperature: 85 °C Rel. humidity of air: 85% Duration: 1000 h Test voltage: V _{NTC} = 0.3 V DC | < 5% ²⁾ | |
| Operational life | MIL-STD-202, method 108 | Test temperature: 150 °C P _{max} = 0.35 mW Duration: 1000 h | < 5%2) | |
| External visual | MIL-STD-883E, method 2009 | Visual inspection | | |
| Physical dimensions | JESD22, method JB-100 | Measured with calibers | | Within the specified values |
| Resistance to solvents | MIL-STD-202, method 215 | Not applicable for SMD thermistors (component has no marking, color coding or coating) | | |
| Mechanical shock | MIL-STD-202, method 213 | Peak value: 1500 <i>g</i> Half sine Condition F | < 5%1) | |
| Vibration | MIL-STD-202, method 204 | Acceleration: 5 g Sweep time: 20 min Frequency range: 10 2000 Hz 3×12 cycles | < 5%1) | |
| Resistance to soldering heat | MIL-STD-202, method 210 | Dip: 260 °C; 10 s 1 heat cycle | < 3%1) | |



B573**V5

SMD NTC thermistors, case size 0603 (1608)

Automotive series

SMD

| Test | Standard | Test conditions | $\Delta R_{25}/R_{25}$ (typical) | Remarks |
|----------------------------------|------------------------------|--|----------------------------------|---------------------------------|
| ESD | AEC-Q200-002, method -002 | Discharge capacitance: 150 pF Discharge resistance: 2 kΩ Charging voltage: 6 kV Contact discharge 2 pulses in each polarity | < 5%2) | |
| Solderability | J-STD-002 | a) Dip: 235 °C; 5 s: aging 4 h @ 155 °C b) Dip: 215 °C; 5 s: steam aging 8 h @ 92 °C c) Dip: 260 °C; 7 s: steam aging 8 h @ 92 °C | | 95% of termination wetted |
| Electrical characterization | | R(25 °C), R(100 °C), B(25/100) | | Within the specified values |
| Flammability | UL-94 V-0 or V-1 | Not applicable for SMD thermistors (component is not coated or encapsulated with plastic materials) | | |
| Board flex | AEC-Q200-005, method -005 | Max. bending: 2 mm Duration @ max. bending: 60 s | < 5%3) | |
| Terminal strength | AEC-Q200-006, method -006 | Max. F: 10 N | < 5%3) | |
| Resistance drift after soldering | | Reflow soldering profile Wave soldering profile | < 1%1) | |

¹⁾ Except B57332V5103+360 $\Delta R_{25}/R_{25}$ (typical) < 1%

²⁾ Except B57332V5103+360 $\Delta R_{25}/R_{25}$ (typical) < 3%

³⁾ Except B57332V5103+360 ΔR₂₅/R₂₅ (typical) < 2%



B573**V5

SMD NTC thermistors, case size 0603 (1608)

Automotive series

SMD

R/T characteristics

| R/T No. | 8500 | | 8502 | | 8507 | | |
|---------|---------------------------------|---------|-------------------------------|---------|---------------------------------|---------|--|
| T (°C) | B _{25/100} = 3650 K | | $B_{25/100} = 4000 \text{ K}$ | [| B _{25/100} = 4480 K | | |
| (- / | R _T /R ₂₅ | α (%/K) | | α (%/K) | R _T /R ₂₅ | α (%/K) | |
| -55.0 | 63.917 | 6.8 | 96.158 | 7.4 | 142.71 | 7.9 | |
| -50.0 | 45.889 | 6.5 | 66.892 | 7.1 | 96.913 | 7.6 | |
| -45.0 | 33.344 | 6.3 | 47.127 | 6.9 | 66.637 | 7.4 | |
| -40.0 | 24.504 | 6.1 | 33.606 | 6.6 | 46.366 | 7.1 | |
| -35.0 | 18.201 | 5.8 | 24.243 | 6.4 | 32.629 | 6.9 | |
| -30.0 | 13.657 | 5.6 | 17.681 | 6.2 | 23.213 | 6.7 | |
| -25.0 | 10.347 | 5.5 | 13.032 | 6.0 | 16.686 | 6.5 | |
| -20.0 | 7.9114 | 5.3 | 9.702 | 5.8 | 12.115 | 6.3 | |
| -15.0 | 6.1019 | 5.1 | 7.2923 | 5.6 | 8.8803 | 6.1 | |
| -10.0 | 4.7454 | 4.9 | 5.5314 | 5.4 | 6.5692 | 5.9 | |
| -5.0 | 3.7198 | 4.8 | 4.2325 | 5.3 | 4.9025 | 5.8 | |
| 0.0 | 2.938 | 4.6 | 3.2657 | 5.1 | 3.6896 | 5.6 | |
| 5.0 | 2.3372 | 4.5 | 2.54 | 4.9 | 2.7994 | 5.4 | |
| 10.0 | 1.8722 | 4.4 | 1.9907 | 4.8 | 2.1406 | 5.3 | |
| 15.0 | 1.5096 | 4.2 | 1.5716 | 4.7 | 1.6492 | 5.1 | |
| 20.0 | 1.2249 | 4.1 | 1.2494 | 4.5 | 1.2798 | 5.0 | |
| 25.0 | 1.0000 | 4.0 | 1.0000 | 4.4 | 1.0000 | 4.9 | |
| 30.0 | 0.82111 | 3.9 | 0.80552 | 4.3 | 0.78663 | 4.7 | |
| 35.0 | 0.67798 | 3.8 | 0.65288 | 4.1 | 0.62277 | 4.6 | |
| 40.0 | 0.56279 | 3.7 | 0.53229 | 4.0 | 0.4961 | 4.5 | |
| 45.0 | 0.46958 | 3.6 | 0.43645 | 3.9 | 0.39757 | 4.4 | |
| 50.0 | 0.39374 | 3.5 | 0.35981 | 3.8 | 0.32044 | 4.3 | |
| 55.0 | 0.33171 | 3.4 | 0.29819 | 3.7 | 0.2597 | 4.1 | |
| 60.0 | 0.28073 | 3.3 | 0.24837 | 3.6 | 0.21161 | 4.0 | |
| 65.0 | 0.23863 | 3.2 | 0.20787 | 3.5 | 0.17331 | 3.9 | |
| 70.0 | 0.2037 | 3.1 | 0.17479 | 3.4 | 0.14265 | 3.8 | |
| 75.0 | 0.17459 | 3.0 | 0.14763 | 3.3 | 0.11799 | 3.8 | |
| 80.0 | 0.15022 | 3.0 | 0.12523 | 3.2 | 0.098035 | 3.7 | |
| 85.0 | 0.12975 | 2.9 | 0.10667 | 3.2 | 0.081823 | 3.6 | |
| 90.0 | 0.11247 | 2.8 | 0.091227 | 3.1 | 0.068589 | 3.5 | |
| 95.0 | 0.097838 | 2.8 | 0.078319 | 3.0 | 0.057735 | 3.4 | |
| 100.0 | 0.085396 | 2.7 | 0.067488 | 2.9 | 0.048796 | 3.3 | |
| 105.0 | 0.074781 | 2.6 | 0.058363 | 2.9 | 0.041403 | 3.2 | |
| 110.0 | 0.065691 | 2.6 | 0.050647 | 2.8 | 0.035263 | 3.2 | |
| 115.0 | 0.057883 | 2.5 | 0.044098 | 2.7 | 0.030143 | 3.1 | |
| 120.0 | 0.051153 | 2.4 | 0.03852 | 2.7 | 0.025858 | 3.0 | |
| 125.0 | 0.045335 | 2.4 | 0.033752 | 2.6 | 0.022258 | 3.0 | |
| 130.0 | 0.040289 | 2.3 | 0.029663 | 2.6 | 0.019223 | 2.9 | |
| 135.0 | 0.0359 | 2.3 | 0.026146 | 2.5 | 0.016655 | 2.8 | |
| 140.0 | 0.032071 | 2.2 | 0.023111 | 2.4 | 0.014476 | 2.8 | |
| 145.0 | 0.028723 | 2.2 | 0.020484 | 2.4 | 0.012619 | 2.7 | |
| 150.0 | 0.025786 | 2.1 | 0.018203 | 2.3 | 0.011033 | 2.7 | |



B573**V5

SMD NTC thermistors, case size 0603 (1608)

Automotive series

SMD

R/T characteristics

| R/T No. | 8509 | | | | | | | |
|---------|---------------------------------|---------|--------|---------------------------------|---------|--------|---------------------------------|---------|
| T (°C) | $B_{25/100} = 3455$ | K | T (°C) | $B_{25/100} = 3455$ | K | T (°C) | $B_{25/100} = 3455$ | K |
| | R _T /R ₂₅ | α (%/K) | | R _T /R ₂₅ | α (%/K) | | R _T /R ₂₅ | α (%/K) |
| -55.0 | 44.605 | 5.9 | 15.0 | 1.4703 | 4.0 | 85.0 | 0.1451 | 2.8 |
| -50.0 | 33.281 | 5.8 | 20.0 | 1.2093 | 3.9 | 90.0 | 0.12663 | 2.7 |
| -45.0 | 25.044 | 5.6 | 25.0 | 1.0000 | 3.7 | 95.0 | 0.11088 | 2.6 |
| -40.0 | 19.003 | 5.4 | 30.0 | 0.83113 | 3.6 | 100.0 | 0.097381 | 2.6 |
| -35.0 | 14.536 | 5.3 | 35.0 | 0.69418 | 3.6 | 105.0 | 0.085788 | 2.5 |
| -30.0 | 11.206 | 5.1 | 40.0 | 0.58255 | 3.5 | 110.0 | 0.075795 | 2.4 |
| -25.0 | 8.7041 | 5.0 | 45.0 | 0.49112 | 3.4 | 115.0 | 0.067155 | 2.4 |
| -20.0 | 6.8104 | 4.8 | 50.0 | 0.41587 | 3.3 | 120.0 | 0.059663 | 2.3 |
| -15.0 | 5.3665 | 4.7 | 55.0 | 0.35365 | 3.2 | 125.0 | 0.053146 | 2.3 |
| -10.0 | 4.2576 | 4.6 | 60.0 | 0.30197 | 3.1 | 130.0 | 0.047463 | 2.2 |
| -5.0 | 3.4001 | 4.4 | 65.0 | 0.25888 | 3.0 | 135.0 | 0.042493 | 2.2 |
| 0.0 | 2.7326 | 4.3 | 70.0 | 0.22278 | 3.0 | 140.0 | 0.038134 | 2.1 |
| 5.0 | 2.2096 | 4.2 | 75.0 | 0.19243 | 2.9 | 145.0 | 0.034302 | 2.1 |
| 10.0 | 1.7973 | 4.1 | 80.0 | 0.16681 | 2.8 | 150.0 | 0.030925 | 2.1 |



B573**V5

SMD NTC thermistors, case size 0603 (1608)


Automotive series

SMD

Taping and packing

1 Taping of SMD NTC thermistors

1.1 Cardboard tape for case size 0402 and 0603 (taping to IEC 60286-3)

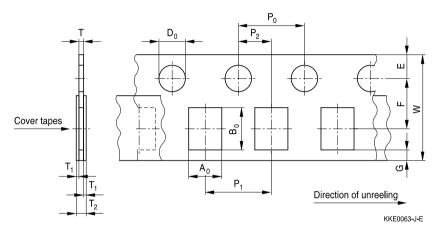

Dimensions (mm)

| | Case size 0402 (8-mm tape) | Case size 0603 (8-mm tape) | Tolerance |
|------------------|----------------------------------|----------------------------------|---------------------|
| $A_0 \times B_0$ | 0.60 × 1.15 | 0.95 × 1.80 | ±0.2 |
| T ₂ | 0.70 | 1.10 | |
| T | 0.60 | 0.90 | max. |
| D_0 | 1.50 | 1.50 | ±0.10 |
| P ₀ | 4.00 | 4.00 | ±0.10 ¹⁾ |
| P_2 | 2.00 | 2.00 | ±0.05 |
| P ₁ | 2.00 | 4.00 | ±0.10 |
| W | 8.00 | 8.00 | ±0.30 |
| E | 1.75 | 1.75 | ±0.10 |
| F | 3.50 | 3.50 | ±0.05 |
| G | 0.75 | 0.75 | min. |

^{1) ≤0.2} mm over 10 sprocket holes.


B573**V5

SMD NTC thermistors, case size 0603 (1608)

Automotive series

SMD

1.2 Blister tape for case size 0805 and 1206 (taping to IEC 60286-3)

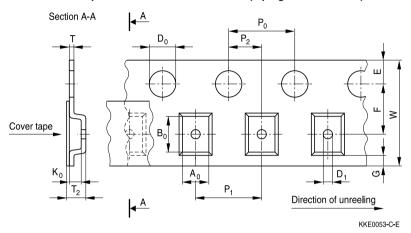

Dimensions (mm)

| | ı | ı | ı |
|------------------|--------------------|------------------|---------------------|
| | Case size | Case size | Tolerance |
| | 0805 | 1206 | |
| | (8-mm tape) | (8-mm tape) | |
| $A_0 \times B_0$ | 1.60×2.40 | 1.90×3.50 | ±0.2 |
| K ₀ | 1.40 | 1.40 | max. |
| T ₂ | 2.5 | 2.5 | max. |
| D ₀ | 1.50 | 1.50 | +0.10/-0 |
| D ₁ | 1.00 | 1.00 | min. |
| P ₀ | 4.00 | 4.00 | ±0.10 ²⁾ |
| P_2 | 2.00 | 2.00 | ±0.05 |
| P ₁ | 4.00 | 4.00 | ±0.10 |
| W | 8.00 | 8.00 | ±0.30 |
| E | 1.75 | 1.75 | ±0.10 |
| F | 3.50 | 3.50 | ±0.05 |
| G | 0.75 | 0.75 | min. |

^{2) ≤0.2} mm over 10 sprocket holes.




B573**V5

SMD NTC thermistors, case size 0603 (1608)

Automotive series

SMD

1.3 Reel packing

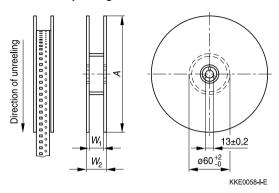

Packing survey

| Case size | Chip thick- ness ³⁾ mm | 8-mm t | ape | Reel d | Reel dimensions | | | | | Packing units | |
|--------------|--|---------|----------------|--------|-----------------|------|---------|-----------|----------------|----------------|--|
| | | Blister | Card- board | A | Tol. | W1 | Tol. | W2 | 180-mm reel | 330-mm reel | |
| 0402 | 0.5 | | х | 180 | -3/+0 | 8.4 | +1.5/-0 | 14.4 max. | 10000 | _ | |
| 0603 | 0.8 | | х | 180 | -3/+0 | 8.4 | +1.5/-0 | 14.4 max. | 4000 | - | |
| | | | | 330 | ±2.0 | 12.4 | +1.5/-0 | 18.4 max. | _ | 16000 | |
| 0805 | 0.8 | х | | 180 | -3/+0 | 8.4 | +1.5/-0 | 14.4 max. | 4000 | 16000 | |
| | 1.2 | х | | 330 | ±2.0 | 12.4 | +1.5/-0 | 18.4 max. | 3000 | 12000 | |
| 1206 | 0.8 | х | | 180 | -2/+0 | 8.4 | +1.5/-0 | 14.4 max. | 4000 | _ | |
| | 1.2 | х | | 180 | -2/+0 | 8.4 | +1.5/-0 | 14.4 max. | 2000 | _ | |

³⁾ Chip thickness depends on the resistance value.



B573**V5

SMD NTC thermistors, case size 0603 (1608)

Automotive series

SMD

2 Packing codes

The last two digits of the complete ordering code state the packing mode:

| Last two digits | | | |
|-----------------|-----|----------------|---------------------|
| 60 | SMD | Cardboard tape | 180-mm reel packing |
| 62 | SMD | Blister tape | 180-mm reel packing |
| 70 | SMD | Cardboard tape | 330-mm reel packing |
| 72 | SMD | Blister tape | 330-mm reel packing |



| _ | | | | | | |
|---|--------|--------|---------|----------|--------------|---|
| п | empera | ture m | easuren | nent and | compensation | п |

B573**V5

SMD NTC thermistors, case size 0603 (1608)

Automotive series

SMD

Mounting instructions

1 Soldering

1.1 SMD NTC thermistors

SMD NTC thermistors can be provided with a nickel barrier termination or on special request with silver-palladium termination. The usage of mild, non-activated fluxes for soldering is recommended as well as a proper cleaning of the PCB.

The nickel barrier layer of the silver/nickel/tin termination (see figure 1) prevents leaching of the silver base metalization layer. This allows great flexibility in the selection of soldering parameters.

The tin prevents the nickel layer from oxidizing and thus ensures better wetting by the solder. The nickel barrier termination is suitable for all commonly-used soldering methods.

Note: SMD NTCs with AgPd termination are not approved for lead-free soldering.




Figure 1
SMD NTC thermistors, structure of nickel barrier termination

1.1.1 Solderability (test to IEC 60068-2-58)

Preconditioning: Immersion into flux F-SW 32.

Evaluation criterion: Wetting of soldering areas ≥95%.

| Solder | Bath temperature (°C) | Dwell time (s) |
|------------------------------|-----------------------|----------------|
| SnPb 60/40 | 215 ±3 | 3 ±0.3 |
| SnAg (3.0 4.0), Cu (0.5 0.9) | 245 ±3 | 3 ±0.3 |

1.1.2 Resistance to soldering heat (test to IEC 60068-2-58)

Preconditioning: Immersion into flux F-SW 32. Evaluation criterion: Leaching of side edges ≤1/3.

| Solder | Bath temperature (°C) | Dwell time (s) |
|------------------------------|-----------------------|----------------|
| SnPb 60/40 | 260 ±5 | 10 ±1 |
| SnAg (3.0 4.0), Cu (0.5 0.9) | 260 ±5 | 10 ±1 |



B573**V5


SMD NTC thermistors, case size 0603 (1608)

Automotive series


SMD


Wave soldering

Temperature characteristic at component terminal with dual wave soldering

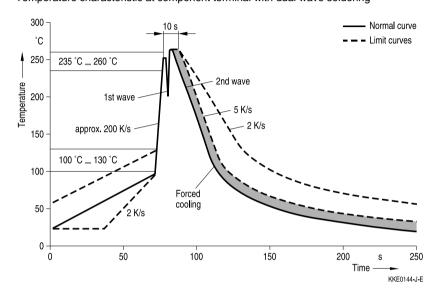

Solder joint profiles for silver/nickel/tin terminations





Too much solder Pad geometry too large, not soldered in preferred direction

KKE0288-H-E



B573**V5


SMD NTC thermistors, case size 0603 (1608)

Automotive series

SMD

Reflow soldering

Recommended temperature characteristic for reflow soldering following JEDEC J-STD-020D

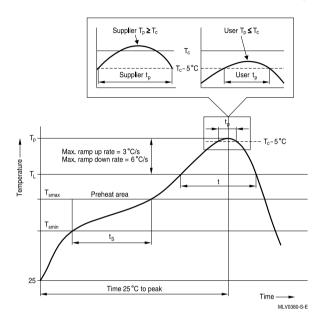

| | | T | T |
|---|--|-----------------------------|-----------------------------|
| Profile feature | | Sn-Pb eutectic assembly | Pb-free assembly |
| Preheat and soak | | | |
| - Temperature min | T_{smin} | 100 °C | 150 °C |
| - Temperature max | T_{smax} | 150 °C | 200 °C |
| - Time | t_{smin} to t_{smax} | 60 120 s | 60 180 s |
| Average ramp-up rate | T_{smax} to T_p | 3 °C/ s max. | 3 °C/ s max. |
| Liquidous temperature | T _L | 183 °C | 217 °C |
| Time at liquidous | t_{L} | 60 150 s | 60 150 s |
| Peak package body temperature | T _p ¹⁾ | 220 °C 235 °C ²⁾ | 245 °C 260 °C ²⁾ |
| Time (t _P) ³⁾ within 5 °C of specified | | 20 s ³⁾ | 30 s ³⁾ |
| classification temperature (T _c) | | 20 5% | 30 8% |
| Average ramp-down rate | T _p to T _{smax} | 6 °C/ s max. | 6 °C/ s max. |
| Time 25 °C to peak temperature | | maximum 6 min | maximum 8 min |

¹⁾ Tolerance for peak profile temperature $(T_{\mbox{\tiny P}})$ is defined as a supplier minimum and a user maximum.

Note: All temperatures refer to topside of the package, measured on the package body surface. Number of reflow cycles: 3

²⁾ Depending on package thickness. For details please refer to JEDEC J-STD-020D.

³⁾ Tolerance for time at peak profile temperature (t_P) is defined as a supplier minimum and a user maximum.



| | EPCO |
|--|------|
| | |


Temperature measurement and compensation SMD NTC thermistors, case size 0603 (1608)


B573**V5


Automotive series

SMD


Solder joint profiles for silver/nickel/tin terminations







1.1.3 Recommended geometry of solder pads



Recommended maximum dimensions (mm)

| Case size inch/mm | А | В | С |
|-------------------|-----|-----|-----|
| 0402/1005 | 0.6 | 0.6 | 1.7 |
| 0603/1608 | 1.0 | 1.0 | 3.0 |
| 0805/2012 | 1.3 | 1.2 | 3.4 |
| 1206/3216 | 1.8 | 1.2 | 4.5 |

1.1.4 Notes

Iron soldering should be avoided, hot air methods are recommended for repair purposes.



B573**V5

SMD NTC thermistors, case size 0603 (1608)

Automotive series

SMD

2 Conductive adhesion

An alternative to soldering is the gluing of thermistors with conductive adhesives. The benefit of this method is that it involves no thermal stress. The adhesives used must be chemically inert.

3 Clamp contacting

Pressure contacting by means of clamps is particularly suitable for applications involving frequent switching and high turn-on powers.

4 Sealing and potting

When thermistors are sealed, potted or overmolded, there must be no mechanical stress caused by thermal expansion during the production process (curing / overmolding process) and during later operation. The upper category temperature of the thermistor must not be exceeded. Ensure that the materials used (sealing / potting compound and plastic material) are chemically neutral.

5 Cleaning

If cleaning is necessary, mild cleaning agents such as ethyl alcohol and cleaning gasoline are recommended. Cleaning agents based on water are not allowed. Ultrasonic cleaning methods are permissible.

6 Storage

In order to maintain their solderability, thermistors must be stored in a non-corrosive atmosphere. Humidity, temperature and container materials are critical factors.

Do not store SMDs where they are exposed to heat or direct sunlight. Otherwise, the packing material may be deformed or SMDs may stick together, causing problems during mounting. After opening the factory seals, such as polyvinyl-sealed packages, use the SMDs as soon as possible.

The components should be left in the original packing. Touching the metallization of unsoldered thermistors may change their soldering properties.

Storage temperature: $-25~^{\circ}\text{C}$ up to 45 $^{\circ}\text{C}$

Relative humidity (without condensation): ≤75% annual mean

<95%, maximum 30 days per annum

Solder the thermistors listed in this data book after shipment from EPCOS within the time specified:

SMDs: 12 months for Ni-barrier termination

6 months for AqPd termination



B573**V5


SMD NTC thermistors, case size 0603 (1608)

Automotive series


SMD

7 Placement and orientation of SMD NTC thermistors on PCB


a) Component placement



It is recommended that the PC board should be held by means of some adequate supporting pins such as shown left to prevent the SMDs from being damaged or cracked.




b) Cracks



When placing a component near an area which is apt to bend or a grid groove on the PC board, it is advisable to have both electrodes subjected to uniform stress, or to position the component's electrodes at right angles to the grid groove or bending line (see c) Component orientation).

c) Component orientation



Choose a mounting position that minimizes the stress imposed on the chip during flexing or bending of the board.



B573**V5

SMD NTC thermistors, case size 0603 (1608)

Automotive series

SMD

Cautions and warnings

General

See "Important notes".

Storage

- Store thermistors only in original packaging. Do not open the package prior to storage.
- Storage conditions in original packaging: storage temperature −25 °C ... +45 °C, relative humidity ≤75% annual mean, <95% maximum 30 days per annum, dew precipitation is inadmissible.</p>
- Do not store thermistors where they are exposed to heat or direct sunlight. Otherwise, the packing material may be deformed or components may stick together, causing problems during mounting.
- Avoid contamination of thermistor surface during storage, handling and processing.
- Avoid storage of thermistors in harmful environments like corrosive gases (SO_x, Cl etc).
- Use the components as soon as possible after opening the factory seals, i.e. the polyvinyl-sealed packages.
- Solder SMD NTC thermistors within the time specified after shipment from EPCOS. For SMD components with nickel barrier termination 12 months, for SMD components with AgPd termination 6 months.

Handling

- NTC thermistors must not be dropped. Chip-offs or any other damage must not be caused during handling of NTCs.
- Do not touch components with bare hands. Gloves are recommended.
- Avoid contamination of thermistor surface during handling.
- Washing processes may damage the product due to the possible static or cyclic mechanical loads (e.g. ultrasonic cleaning). They may cause cracks to develop on the product and its parts, which might lead to reduced reliability or lifetime.

Solderina

- Use resin-type flux or non-activated flux.
- Insufficient preheating may cause ceramic cracks.
- Rapid cooling by dipping in solvent is not recommended.
- Complete removal of flux is recommended.



B573**V5

SMD NTC thermistors, case size 0603 (1608)

Automotive series

SMD

Mounting

- Ensure that no thermo-mechanical stress occurs due to production processes (curing or overmolding processes) when thermistors are sealed, potted or overmolded or during their subsequent operation. The maximum temperature of the thermistor must not be exceeded. Ensure that the materials used (sealing/potting compound and plastic material) are chemically neutral.
- Electrodes/contacts must not be scratched or damaged before/during/after the mounting process.
- Contacts and housing used for assembly with the thermistor must be clean before mounting.
- Ensure that adjacent materials are designed for operation at temperatures comparable to the surface temperature of the thermistor. Be sure that surrounding parts and materials can withstand the temperature.
- Avoid contamination of the thermistor surface during processing.
- The connections of sensors (e.g. cable end, wire end, plug terminal) may only be exposed to an environment with normal atmospheric conditions.
- Avoid using chemical substances as mounting aids. It must be ensured that no water or other liquids enter the NTC thermistors (e.g. through plug terminals). In particular, water based substances (e.g. soap suds) must not be used as mounting aids for sensors.

Operation

- Use thermistors only within the specified operating temperature range.
- Use thermistors only within the specified power range.
- Environmental conditions must not harm the thermistors. Only use the thermistors under normal atmospheric conditions or within the specified conditions.
- Contact of NTC thermistors with any liquids and solvents should be prevented. It must be ensured that no water enters the NTC thermistors (e.g. through plug terminals). For measurement purposes (checking the specified resistance vs. temperature), the component must not be immersed in water but in suitable liquids (e.g. Galden).
- Avoid dewing and condensation unless thermistor is specified for these conditions.
- Be sure to provide an appropriate fail-safe function to prevent secondary product damage caused by malfunction.

This listing does not claim to be complete, but merely reflects the experience of EPCOS AG.



| Temperature measurement and compensation | B573**V5 |
|--|-------------------|
| SMD NTC thermistors, case size 0603 (1608) | Automotive series |

SMD

Symbols and terms

| Symbol | English | German |
|--|--|--|
| A | Area | Fläche |
| B B _{25/100} | B value B value determined by resistance measurement at 25 °C and 100 °C | B-Wert B-Wert, ermittelt durch Widerstands- messungen bei 25 °C und 100 °C |
| C_{th} | Heat capacitance | Wärmekapazität |
| 1 | Current | Strom |
| N | Number (integer) | Anzahl (ganzzahliger Wert) |
| $egin{array}{l} P_{25} \ P_{diss} \ P_{el} \ P_{max} \end{array}$ | Maximum power at 25 °C Power dissipation Electrical power Maximum power within stated temperature range | Maximale Leistung bei 25 °C Verlustleistung Elektrische Leistung Maximale Leistung im angegebenenTemperaturbereich |
| $\begin{array}{l} \Delta R_{\text{p}}/R_{\text{B}} \\ \\ R_{\text{ins}} \\ R_{\text{P}} \\ \\ R_{\text{R}} \\ \\ \Delta R_{\text{p}}/R_{\text{R}} \\ \\ R_{\text{S}} \\ \\ R_{\text{T}} \end{array}$ | Resistance tolerance caused by spread of B value Insulation resistance Parallel resistance Rated resistance Resistance tolerance Series resistance at temperature T (e.g. R ₂₅ = resistance at 25 °C) | Widerstandstoleranz, die durch die Streuung des B-Wertes verursacht wird Isolationswiderstand Parallelwiderstand Nennwiderstand Widerstandstoleranz Serienwiderstand Widerstand bei Temperatur T (z.B. R ₂₅ = Widerstand bei 25 °C) |
| $\begin{array}{c} T \\ \Delta T \\ t \\ T_A \\ T_{max} \end{array}$ | Temperature Temperature tolerance Time Ambient temperature Upper category temperature Lower category temperature Operating temperature | Temperatur Temperaturtoleranz Zeit Umgebungstemperatur Obere Grenztemperatur (Kategorietemperatur) Untere Grenztemperatur (Kategorietemperatur) Betriebstemperatur |
| T_R T_surf | Rated temperature Surface temperature | Nenntemperatur Oberflächentemperatur |
| V V _{ins} V _{op} V _{test} | Voltage Insulation test voltage Operating voltage Test voltage | Spannung Isolationsprüfspannung Betriebsspannung Prüfspannung |



| Temperature measurement and compensation | B573**V5 |
|--|-------------------|
| SMD NTC thermistors, case size 0603 (1608) | Automotive series |

SMD

| Symbol | English | German |
|----------------------|---|---|
| α | Temperature coefficient | Temperaturkoeffizient |
| Δ | Tolerance, change | Toleranz, Änderung |
| δ_{th} | Dissipation factor | Wärmeleitwert |
| $\tau_c \\ \tau_a$ | Thermal cooling time constant Thermal time constant | Thermische Abkühlzeitkonstante Thermische Zeitkonstante |

Abbreviations / Notes

| Symbol | English | German |
|--------|--|--|
| SMD | Surface-mounted devices | Oberflächenmontierbares Bauelement |
| * | To be replaced by a number in ordering codes, type designations etc. | Platzhalter für Zahl im Bestellnummern- code oder für die Typenbezeichnung. |
| + | To be replaced by a letter. | Platzhalter für einen Buchstaben. |
| | All dimensions are given in mm. | Alle Maße sind in mm angegeben. |
| | The commas used in numerical values denote decimal points. | Verwendete Kommas in Zahlenwerten bezeichnen Dezimalpunkte. |



Important notes

The following applies to all products named in this publication:

- 1. Some parts of this publication contain statements about the suitability of our products for certain areas of application. These statements are based on our knowledge of typical requirements that are often placed on our products in the areas of application concerned. We nevertheless expressly point out that such statements cannot be regarded as binding statements about the suitability of our products for a particular customer application. As a rule, EPCOS is either unfamiliar with individual customer applications or less familiar with them than the customers themselves. For these reasons, it is always ultimately incumbent on the customer to check and decide whether an EPCOS product with the properties described in the product specification is suitable for use in a particular customer application.
- 2. We also point out that in individual cases, a malfunction of electronic components or failure before the end of their usual service life cannot be completely ruled out in the current state of the art, even if they are operated as specified. In customer applications requiring a very high level of operational safety and especially in customer applications in which the malfunction or failure of an electronic component could endanger human life or health (e.g. in accident prevention or lifesaving systems), it must therefore be ensured by means of suitable design of the customer application or other action taken by the customer (e.g. installation of protective circuitry or redundancy) that no injury or damage is sustained by third parties in the event of malfunction or failure of an electronic component.
- 3. The warnings, cautions and product-specific notes must be observed.
- 4. In order to satisfy certain technical requirements, some of the products described in this publication may contain substances subject to restrictions in certain jurisdictions (e.g. because they are classed as hazardous). Useful information on this will be found in our Material Data Sheets on the Internet (www.epcos.com/material). Should you have any more detailed questions, please contact our sales offices.
- 5. We constantly strive to improve our products. Consequently, the products described in this publication may change from time to time. The same is true of the corresponding product specifications. Please check therefore to what extent product descriptions and specifications contained in this publication are still applicable before or when you place an order. We also reserve the right to discontinue production and delivery of products. Consequently, we cannot guarantee that all products named in this publication will always be available. The aforementioned does not apply in the case of individual agreements deviating from the foregoing for customer-specific products.
- Unless otherwise agreed in individual contracts, all orders are subject to the current version of the "General Terms of Delivery for Products and Services in the Electrical Industry" published by the German Electrical and Electronics Industry Association (ZVEI).
- 7. The trade names EPCOS, BAOKE, Alu-X, CeraDiode, CeraLink, CSMP, CSSP, CTVS, DeltaCap, DigiSiMic, DSSP, FilterCap, FormFit, MiniBlue, MiniCell, MKD, MKK, MLSC, MotorCap, PCC, PhaseCap, PhaseCube, PhaseMod, PhiCap, SIFERRIT, SIFI, SIKOREL, SilverCap, SIMDAD, SiMic, SIMID, SineFormer, SIOV, SIP5D, SIP5K, ThermoFuse, WindCap are trademarks registered or pending in Europe and in other countries. Further information will be found on the Internet at www.epcos.com/trademarks.