

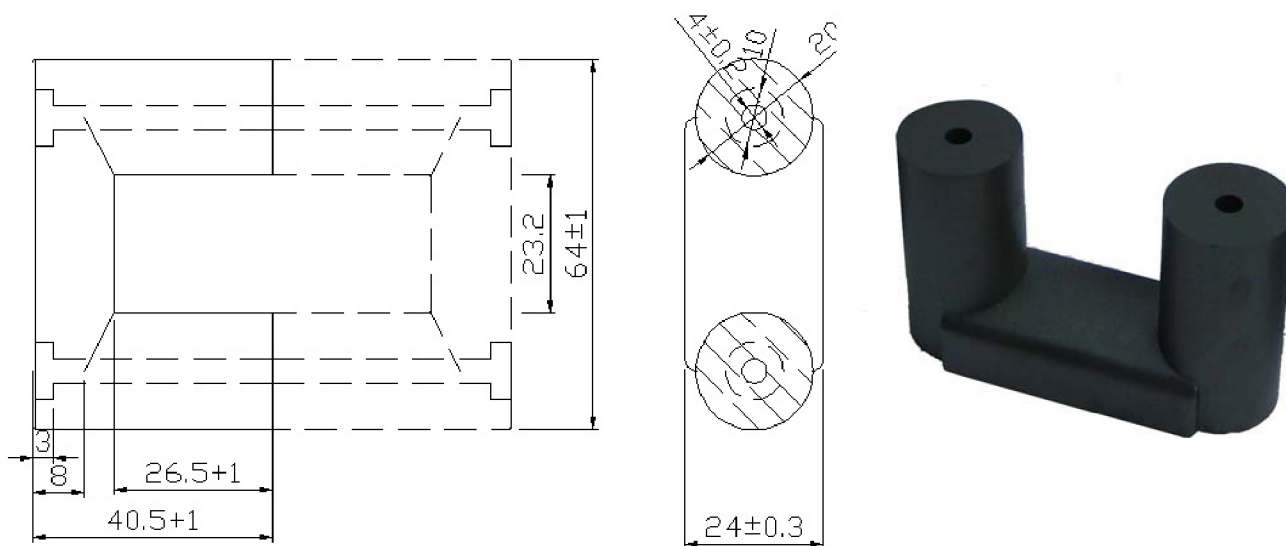


UR64/40/20

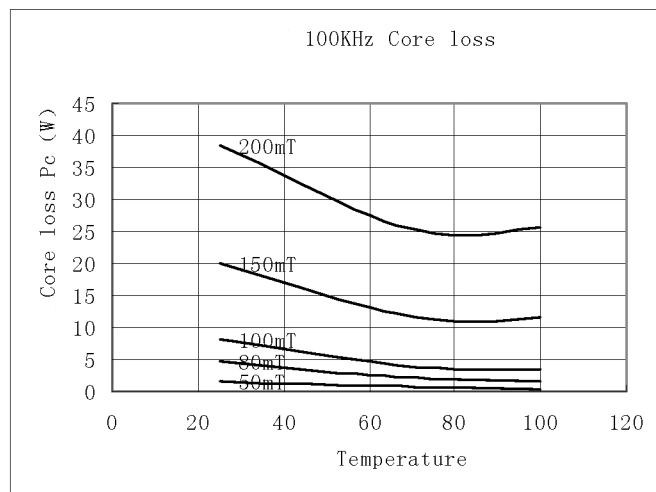

Parameter	Symbol	Value	Unit
Core constant	C1	0.724	mm ⁻¹
Effective path length	Le	210	mm
Effective area	Ae	290	mm ²
Effective volume	Ve	61000	mm ³
Inductance factor	AL	3750	nH/N ²
Weight of set	W	280	g
Other name		UR64 UR64/40/20	

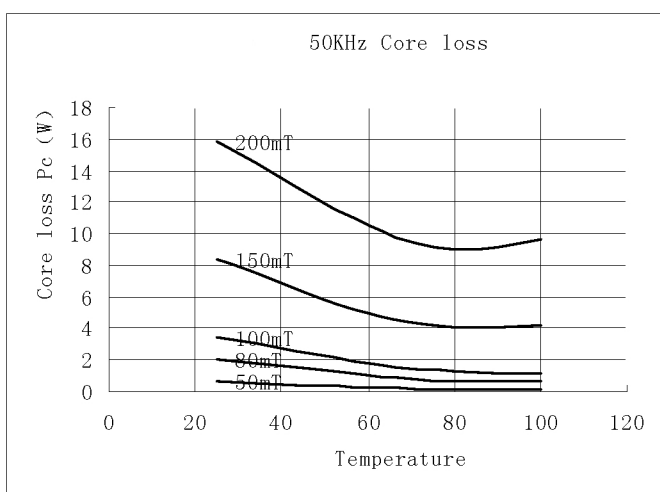

Circuit Type	Calculated Output Power				Unit:W
	Switching Frequency				
	20KHz	50KHz	100KHz	250KHz	
Push-pull converter	2300	3700	5100	10100	
Flyback converter	700	1200	1700	3300	
Forward converter	1100	1800	2500	5000	